



EBARA

	Page
- SPECIFICATIONS	
PUMP SPECIFICATIONS	200
PUMP SPECIFICATIONS	201
MOTOR SPECIFICATIONS	202
SELECTION CHART	203
SELECTION CHART	204
SELECTION CHART	205
PERFORMANCE CURVE 32-125	206
PERFORMANCE CURVE 32-160	207
PERFORMANCE CURVE 32-200	208
PERFORMANCE CURVE 40-125	209
PERFORMANCE CURVE 40-160	210
PERFORMANCE CURVE 40-200	211
PERFORMANCE CURVE 50-125	212
PERFORMANCE CURVE 50-160	213
PERFORMANCE CURVE 50-200	214
PERFORMANCE CURVE 65-125	215
PERFORMANCE CURVE 65-160	216
PERFORMANCE CURVE 65-200	217
PERFORMANCE CURVE 65-250	218
PERFORMANCE CURVE 80-160	219
PERFORMANCE CURVE 80-200	220
PERFORMANCE CURVE 80-250	221
- CONSTRUCTIONS	
SECTIONAL VIEW 3M-3LM (32,40,50,65-125/160/200)	300
CONSTRUCTIONS 3M-3LM (32,40,50,65-125/160/200)	301
SECTIONAL VIEW 3LM 80-160/11/13	302
SECTIONAL VIEW 3LM 80-160/15/18.5	303
CONSTRUCTIONS 3LM 80-160	304
SECTIONAL VIEW 3S-3LS (32,40,50)	305
SECTIONAL VIEW 3S-3LS (65-125/160/200)	306
CONSTRUCTIONS 3S-3LS (32,40,50,65-125/160/200)	307
SECTIONAL VIEW 3LS 80-160	308
CONSTRUCTIONS 3LS 80-160	309
SECTIONAL VIEW 3LS (65-250, 80-200/250)	310
CONSTRUCTIONS 3LS (65-250, 80-200/250)	311
SECTIONAL VIEW 3P-3LP (32,40,50,65-125/160/200)	312
CONSTRUCTIONS 3P-3LP (32,40,50,65-125/160/200)	313
SECTIONAL VIEW 3LP 80-160	314
SECTIONAL VIEW 3LP (65-250, 80-200/250)	315
SECTIONAL VIEW 3LP (65-250, 80-200/250)	316
CONSTRUCTIONS 3LP 80-160	317
CONSTRUCTIONS 3LP (65-250, 80-200/250)	318

CONTENTS

50 Hz

Rev. H

	Page
CONSTRUCTIONS : BALL BEARING	319
CONSTRUCTIONS : BALL BEARING	320
CONSTRUCTIONS : MECHANICAL SEAL (standard and H version)	321
CONSTRUCTIONS : MECHANICAL SEAL (L version Ø 22)	322
CONSTRUCTIONS : MECHANICAL SEAL (L version Ø 30-35)	323
CONSTRUCTIONS : MECHANICAL SEAL (HS version Ø 22)	324
CONSTRUCTIONS : MECHANICAL SEAL (HS and E version)	325
CONSTRUCTIONS : COUPLING	326
CONSTRUCTIONS : FLEXIBLE COUPLING	327
CONSTRUCTIONS : COUNTERFLANGE	328
CONSTRUCTIONS : COUNTERFLANGE	329
- DIMENSIONS	
DIMENSIONS 3M-3LM (32,40,50,65/125/160)	400
DIMENSIONS 3M-3LM (50-200,65-160/15,65-200)	401
DIMENSIONS 3LM 80-160/11/13	402
DIMENSIONS 3LM 80-160/15/18.5	403
DIMENSIONS 3S-3LS (32,40,50)	404
DIMENSIONS 3S-3LS (32,65)	405
DIMENSIONS 3S-3LS (40,50,65)	406
DIMENSIONS 3S-3LS (32,40,50,65)	407
DIMENSIONS 3LS 80-160	408
DIMENSIONS 3LS (65-250,80-200/250)	409
DIMENSIONS 3LS 80-200/250	410
DIMENSIONS 3LS 80-250/55	411
DIMENSIONS 3P-3LP (32-40-50-65)	412
DIMENSIONS 3P-3LP (32-40-50-65)	413
DIMENSIONS 3LP (65-250,80)	414
DIMENSIONS 3LP (80-200/250)	415
DIMENSIONS 3LP 80-250/55	416
PACKING AND WEIGHT 3M-3LM	417
PACKING AND WEIGHT 3S-3LS	418
DIMENSIONS AND WEIGHT 3P-3LP	419
- TECHNICAL DATA	
MOTOR DATA	500
MOTOR DATA	501

PUMP SPECIFICATIONS

50 Hz

Rev. H

Version				3M	3S	3P	3LM	3LS	3LP		
Pump sizes				32-125	■	■	■	■	■	■	
				32-160	■	■	■	■	■	■	■
				32-200	■	■	■	■	■	■	■
				40-125	■	■	■	■	■	■	■
				40-160	■	■	■	■	■	■	■
				40-200	■	■	■	■	■	■	■
				50-125	■	■	■	■	■	■	■
				50-160	■	■	■	■	■	■	■
				50-200	■	■	■	■	■	■	■
				65-125	■	■	■	■	■	■	■
				65-160	■	■	■	■	■	■	■
				65-200	■	■	■	■	■	■	■
				65-250	-	-	-	-	●	●	●
				80-160	-	-	-	●	●	●	●
				80-200	-	-	-	-	●	●	●
80-250	-	-	-	-	●	●	●				
Liquid Handled	Type of liquid			Clean water and moderately aggressive fluids							
				/			Clean water, drinking water, water contains glycol for E version				
	Temperature	min.	[°C]	-10			-10 -20 for E version				
		max.		+90 110 for (H-HS version)			+110 +120 for E version				
Maximum working pressure			[MPa]	1							

- Available also with H and HS option for 32, 40, 50, 65-125/160/200.
- Available also with H and E option for 65-250, 80.
- Not available.

PUMP SPECIFICATIONS

50 Hz

Rev. H

Version			3M	3S	3P	3LM	3LS	3LP	
Construction	Impeller		Closed centrifugal type for [32, 40, 50 version] Reinforced laser welding for [40-200/11, 50-200/15] Closed centrifugal three dimensional blades for [65 and 80 version]						
	Shaft seal type		Mechanical seal			Mechanical seal with stationary ring secured against rotation. Mechanical seal for [H-E option]			
	Bearing		Sealed ball bearing						
Pipe Connection	Suction	32-125/160/200	Flange DN50 according DIN 2532 standard						
		40-125/160/200	Flange DN65 according DIN 2532 standard						
		50-125/160/200	Flange DN65 according DIN 2532 standard						
		65-125/160/200/250	Flange DN80 according DIN 2532 standard						
		80-160/200/250	Flange DN100 according DIN 2532 standard						
	Discharge	32-125/160/200	Flange DN32 according DIN 2532 standard						
		40-125/160/200	Flange DN40 according DIN 2532 standard						
		50-125/160/200	Flange DN50 according DIN 2532 standard						
Material	Casing	32-125/160/200	EN 1.4301 (AISI 304)			EN 1.4404 (AISI 316L)			
		40-125/160/200							
		65-250	/			EN 1.4401 (AISI 316) Made by precision casting			
		80-160/200/250							
	Impeller	32-125/160/200	EN 1.4301 (AISI 304)			EN 1.4404 (AISI 316L)			
		40-125/160/200							
		50-125/160	EN 1.4401 (AISI 316) Made by precision casting						
		65-125/160/200							
	Casing cover	32-125/160/200	EN 1.4301 (AISI 304)			EN 1.4404 (AISI 316L)			
		40-125/160/200							
		50-125/160	/			EN 1.4401 (AISI 316) Made by precision casting			
		65-125/160/200							
	Mechanical seal	32-125/160/200	Ceramic/Carbon/NBR [standard version] Ceramic/Carbon/FPM [H option] SiC/SiC/FPM [HS option]			SiC/SiC/FPM [L version]			
		40-125/160/200							
		50-125/160	/						
		65-125/160/200							
	O-ring	65-250		NBR FPM for [H-HS option]			FPM		
		80-160/200/250							
	Shaft	32, 40, 50 65-125 65-160/11 50-200/15 65-160/15 65-200	d=19	EN 1.4301 (AISI 304)			EN 1.4404 (AISI 316L)		
			d=22						
d=24									
d=24									
65-250 80-160 80-200/22 80-200/ 30-37kW 80-250		d=24	/			EN 1.4462 (Duplex stainless steel) EN 1.4404 (AISI 316L) EN 1.4404 EN 1.4462 (Duplex stainless steel) EN 1.4462 (Duplex stainless steel)			
		d=24							
		d=24							
		d=29							
Bracket		Cast iron - aluminium							

MOTOR SPECIFICATIONS

50 Hz

Rev. H


Version	3(.)M		3(.)S	3(.)P
Type	Electric-TEFC			
	Single Phase	Three phase		
No.of Poles	2			
Rotation speed [min ⁻¹]	~2900			
Insulation class	F (class B for temperature rise)			
Protection degree	IP 55			
Power rating [kW]	1.1 ÷ 2.2	1.1 ÷ 22	1.1 ÷ 55	
	[HP]	1.5 ÷ 3.0	1.5 ÷ 30	1.5 ÷ 75
Frequency [HZ]	50			
Voltage [V]	230 ±10%	220÷240 / 380÷415 ±5% (up to 4.0 kW) 380÷415 / 660÷720 ±5% (5.5 kW and above)		
Casing material	Aluminium / Cast iron			
Dimensions of cable entry	M20x1.5	-PG 13.5 -PG 16 -PG 21	- M20x1.5 - M25x1.5 - M32x1.5 - M40x1.5 - M50x1.5 - M63x1.5	
Flange mount (IEC motor)	/		IM B5 (up to 2.2 kW) IM B35 (3.0 kw and above)	IM B3

SELECTION CHART

50 Hz

Rev. H

TYPE KEY

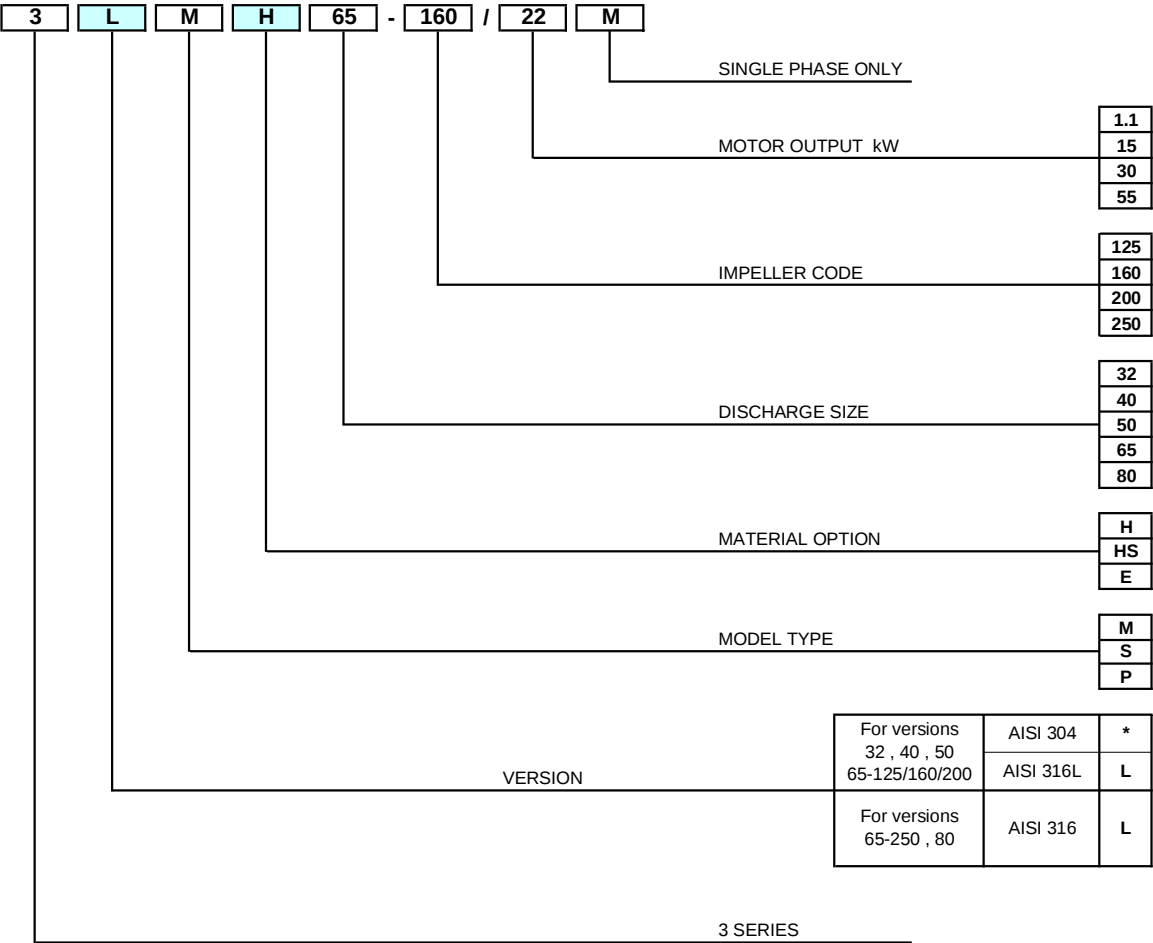

*) No indication

SELECTION CHART

50 Hz

Rev. H

3 SERIES: 32, 40, 50 VERSION

Pump type	kW	HP	l/min m³/h	0	100 6	150 9	200 12	300 18	333 20	360 22	400 24	450 27	500 30	600 36	700 42	800 48	1000 60	1200 72
32-125/1.1(M) *	1.1	1.5	22.5	21	19.9	18.4	14.1	12	-	-	-	-	-	-	-	-	-	-
32-160/1.5(M) *	1.5	2	29.5	28	26.5	24.5	19.2	17	-	-	-	-	-	-	-	-	-	-
32-160/2.2(M) *	2.2	3	37	35.5	34	32	27	25	-	-	-	-	-	-	-	-	-	-
32-200/3.0	3	4	44	42	40	37.5	31	28	-	-	-	-	-	-	-	-	-	-
32-200/4.0	4	5.5	55	53.5	52	49.5	43.5	40.5	38	-	-	-	-	-	-	-	-	-
32-200/5.5	5.5	7.5	70.5	69	67.5	65	58.5	-	-	-	-	-	-	-	-	-	-	-
32-200/7.5	7.5	10	70.5	69	67.5	65	58.5	55.5	53	49	44	-	-	-	-	-	-	-
40-125/1.5(M) *	1.5	2	20	-	-	19	17.6	17	16.5	15.7	14.5	13.2	10.3	7	-	-	-	-
40-125/2.2(M) *	2.2	3	26.5	-	-	25.5	24	23.5	23	22	21	19.5	16.4	13	-	-	-	-
40-160/3.0	3	4	31	-	-	29.5	27.5	27	26.5	25.5	24	22.5	20	17	-	-	-	-
40-160/4.0	4	5.5	40	-	-	38.5	37	36	35.5	34.5	33	32	29	25.5	-	-	-	-
40-200/5.5	5.5	7.5	47	-	-	45.5	44	43	42.5	41	39.5	38	35	31	-	-	-	-
40-200/7.5	7.5	10	58	-	-	57	55.5	55	54.5	53.5	52.5	51	47.5	44	-	-	-	-
40-200/11	11	15	72	-	-	71	70	70	69.5	68.5	67.5	66	63	59	-	-	-	-
50-125/2.2(M) *	2.2	3	19	-	-	-	-	-	17.5	17	16.3	14.9	13.4	11.7	8	-	-	-
50-125/3.0	3	4	22	-	-	-	-	-	20.5	20	19.6	18.4	17	15.4	11.8	8	-	-
50-125/4.0	4	5.5	26.5	-	-	-	-	-	26	25.5	25	24	22.5	21.5	17.9	14	-	-
50-160/5.5	5.5	7.5	33	-	-	-	-	-	31	30.5	30	28.5	27	25.5	22	18	-	-
50-160/7.5	7.5	10	40	-	-	-	-	-	38.5	38	37.5	36	35	33.5	30	26	-	-
50-200/9.2	9.2	12.5	53	-	-	-	-	-	-	-	50	49	47.5	45.5	40.5	34	-	-
50-200/11	11	15	59	-	-	-	-	-	-	-	56	55	54	52	48	42	-	-
50-200/15	15	20	72	-	-	-	-	-	-	-	70	69	68	66	62	57	-	-

* Single phase version only for 3M type.


3 SERIES: 65, 80 VERSION

Pump type	kW	HP	l/min m³/h	0	600 36	700 42	900 54	1300 78	1500 90	1700 102	1900 114	2100 126	2200 132	2300 138	2400 144	2500 150	3000 180	3400 204	3600 216	3800 228	4000 240
65-125/4.0	4	5.5	22.2	19.8	19	17.3	13.3	11	8.6	6.3	-	-	-	-	-	-	-	-	-	-	-
65-125/5.5	5.5	7.5	27	-	24	22.2	18	15.7	13.3	10.8	8	-	-	-	-	-	-	-	-	-	-
65-125/7.5	7.5	10	32	-	29.5	27.8	23.5	21.1	18.7	16.1	13.4	12	-	-	-	-	-	-	-	-	-
65-160/7.5	7.5	10	32	-	30	28.6	24.8	22.5	19.9	17.1	14.2	-	-	-	-	-	-	-	-	-	-
65-160/9.2	9.2	12.5	36.5	-	34.5	32.8	28.8	26.5	23.9	21.1	18.3	16.8	-	-	-	-	-	-	-	-	-
65-160/11	11	15	40.5	-	38.5	37.1	33.1	30.9	28.4	25.8	23	21.5	20	-	-	-	-	-	-	-	-
65-160/15	15	20	48	-	45.5	44	40	37.8	35.3	32.6	29.6	28	26.5	-	-	-	-	-	-	-	-
65-200/15	15	20	53.5	-	51	49	44	41.5	38.4	35.3	31.8	30	-	-	-	-	-	-	-	-	-
65-200/18.5	18.5	25	60.5	-	58.5	56.5	51.5	49	46	43	39.7	38	36.3	-	-	-	-	-	-	-	-
65-200/22	22	30	67	-	65.5	64	59.5	57	54	51	48	46.5	45	-	-	-	-	-	-	-	-
65-250/30	30	40	78	-	-	77	73.5	71	68	64.5	60	57.5	55	52	-	-	-	-	-	-	-
65-250/37	37	50	89	-	-	88	85.5	83	80.5	77.5	74	72	70	67.5	65	-	-	-	-	-	-
80-160/11	11	15	29	-	-	-	27.3	26.4	25.4	24.2	23	22.4	21.8	21.1	20.4	16.4	12.5	-	-	-	-
80-160/13	13	17.5	32	-	-	-	30.5	29.7	28.8	27.7	26.5	25.9	25.3	24.6	24	20.1	16.5	14.5	-	-	-
80-160/15R	15	20	35	-	-	-	34	33.3	32.5	31.5	30.5	30	29.4	28.8	28.1	24.4	21	19.1	17	-	-
80-160/18.5	18.5	25	40	-	-	-	39	38.4	37.6	36.7	35.7	35.2	34.7	34.1	33.5	30	26.4	24.4	22.3	20	-
80-200/22	22	30	50	-	-	-	48	47	45.5	44.5	43	42	41	40	39	33.2	27.8	25	-	-	-
80-200/30	30	40	60	-	-	-	58.5	58	57	56	54.5	54	53	52	51	46.5	41.5	39	36.1	33	-
80-200/37	37	50	66	-	-	-	64	63	62	61	59.5	59	58	57.5	56.5	51.5	47	44.5	41.5	38.5	-
80-250/37	37	50	73	-	-	-	71.5	70.5	68.5	66.5	64	63	61.5	60	58.5	48.5	38	-	-	-	-
80-250/45	45	60	84	-	-	-	82.5	81.5	80	78	76	75	73.5	72.5	71	62	53	48	42.5	-	-
80-250/55	55	75	95	-	-	-	93.5	92.5	91.5	90	88.5	87.5	86.5	85.5	84	76.5	68.5	64.5	60	55	-

SELECTION CHART

50 Hz

Rev. H

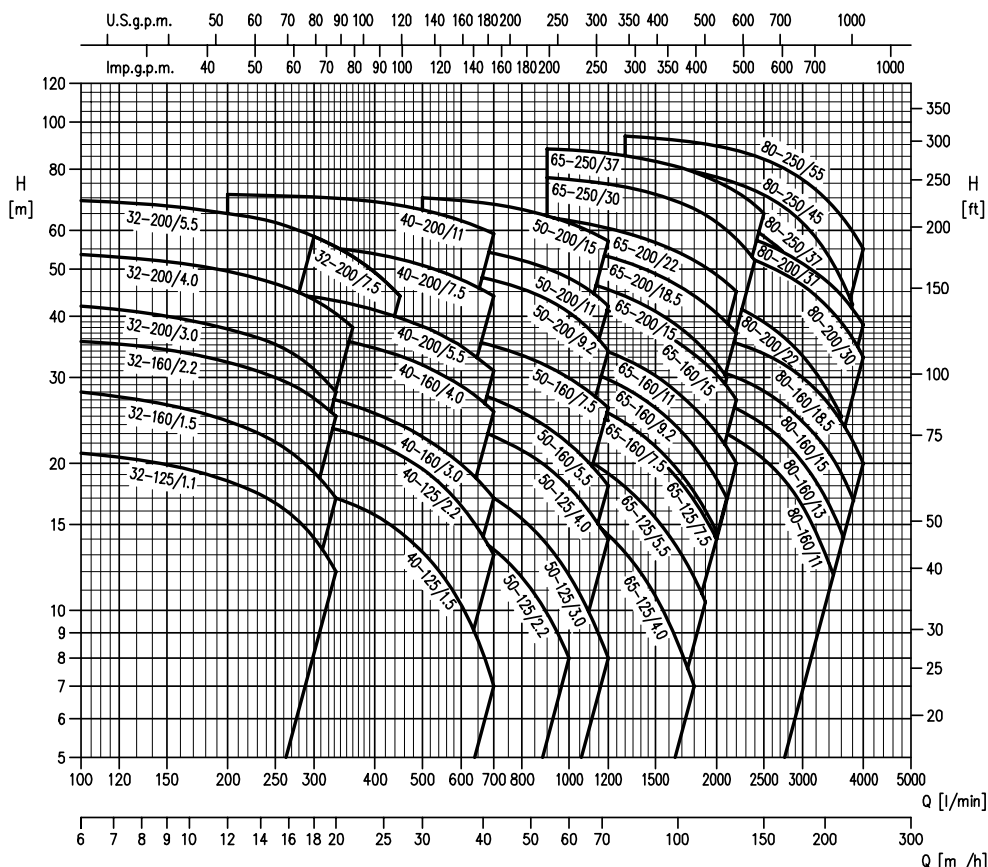**PERFORMANCE CURVES**


The specifications below qualify the curves shown on the following pages.

- ◆ Tolerances according to ISO 9906 Annex A
- ◆ The curves refer to effective speed of asynchronous motors at 50 Hz
- ◆ Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt)
- ◆ The NPSH curve is an average curve obtained in the same conditions of performance curves. During the pump selection, consider to get a safety margin of at least 1 m.
- ◆ The continuous curves indicate the recommended working range. The dotted curve is only a guide.
- ◆ In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.
- ◆ Symbols explanation:
 - Q = volume flow rate
 - H = total head
 - P₂ = pump power input (shaft power)
 - η = pump efficiency
 - NPSH = net positive suction head required by the pump

PERFORMANCE CURVE

50 Hz

Rev. H

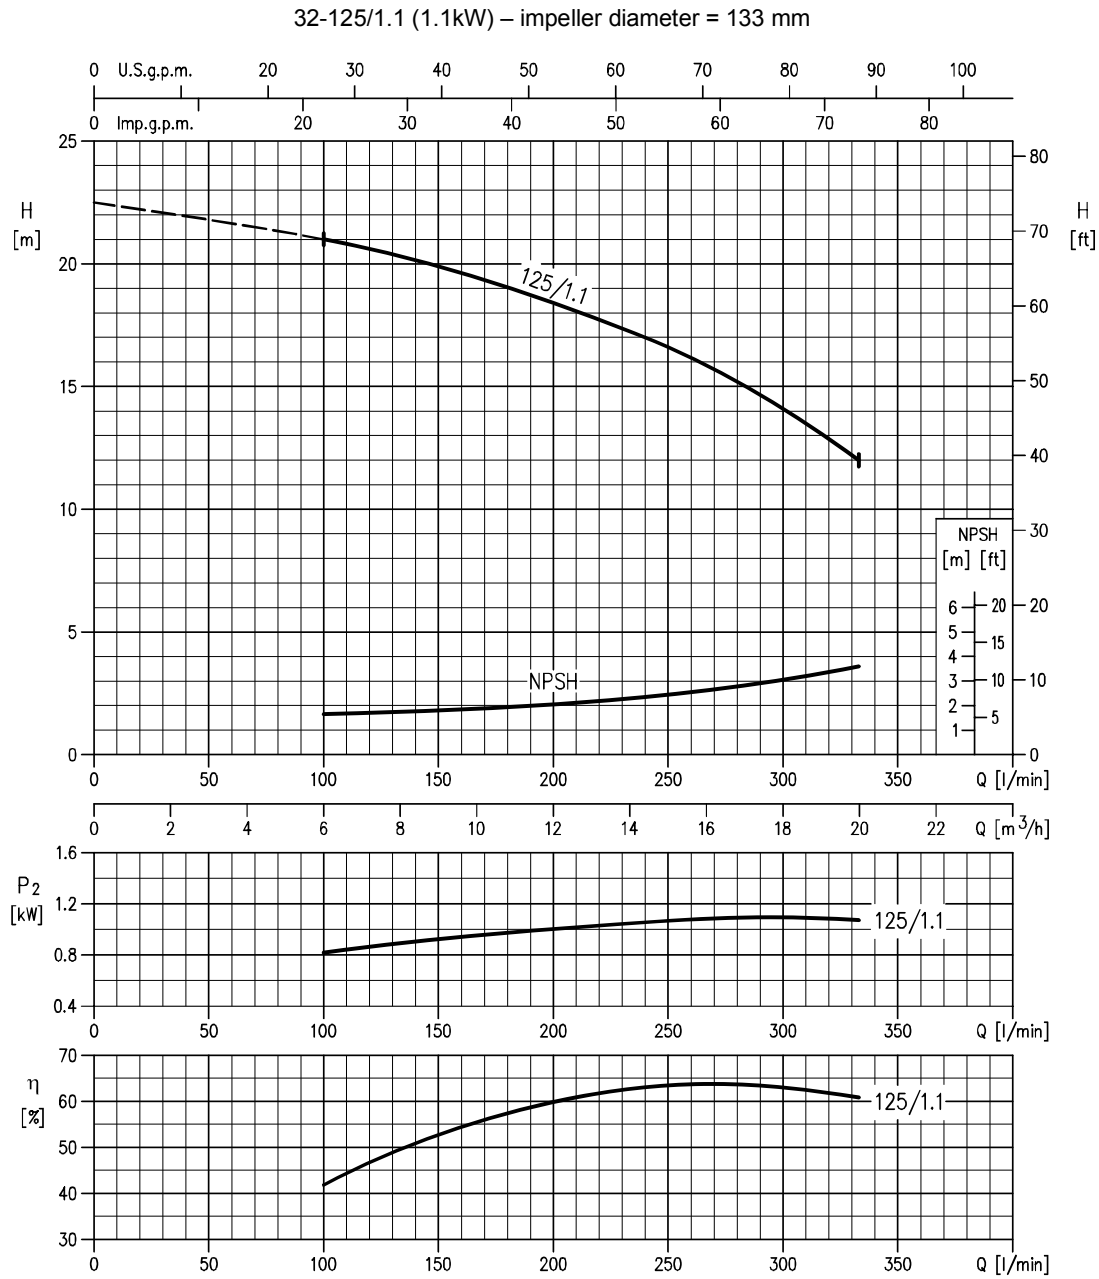


Rotation speed ≈2900 min⁻¹
Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

32-160/1.5 (1.5kW) – impeller diameter = 151 mm
 32-160/2.2 (2.2kW) – impeller diameter = 166 mm

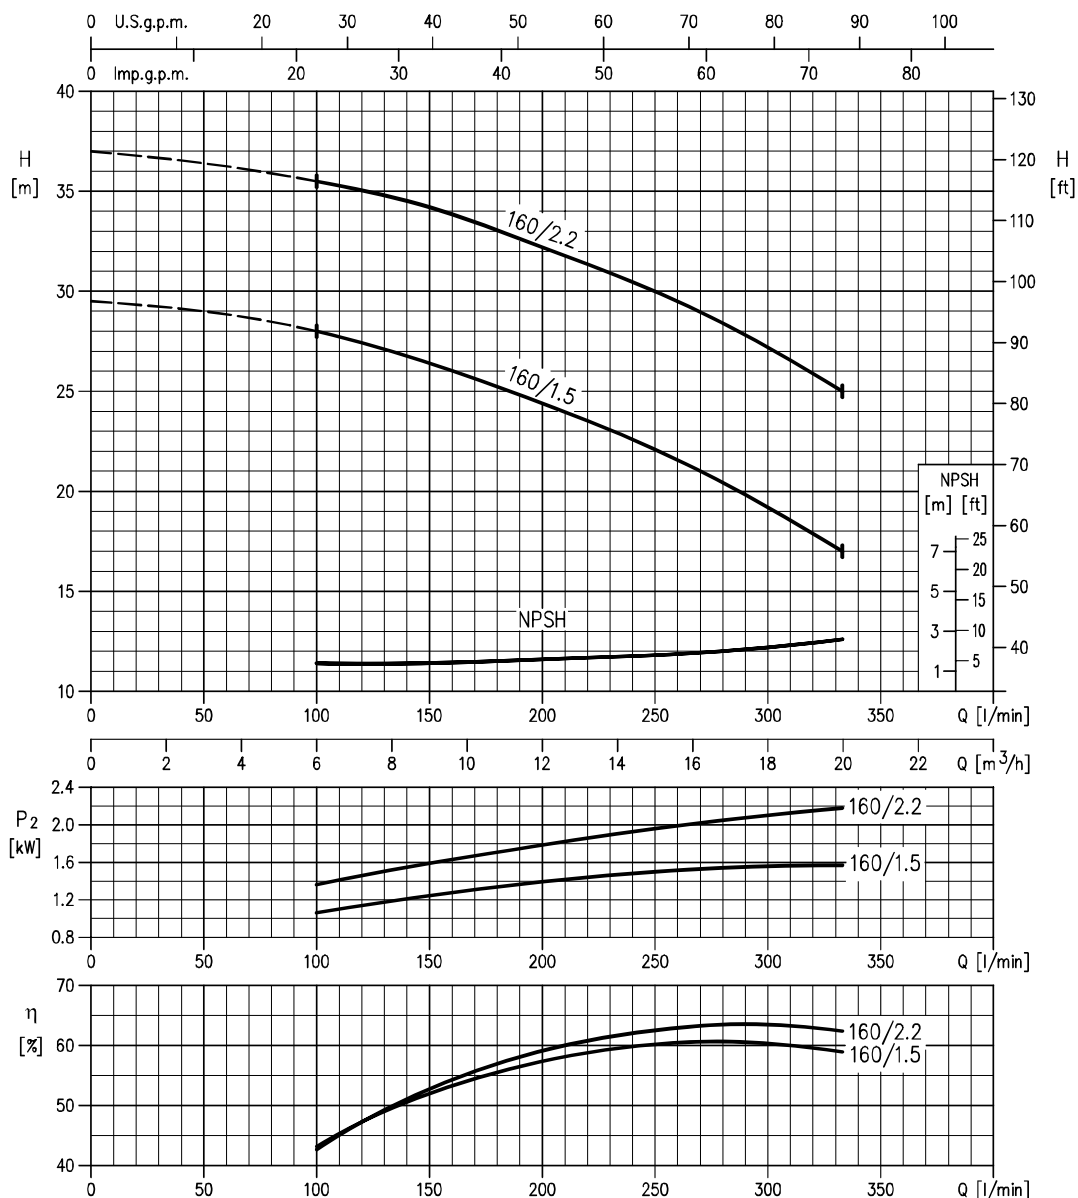


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

32-200/3 (3.0kW) – impeller diameter = 186 mm
 32-200/4 (4.0kW) – impeller diameter = 200 mm
 32-200/5.5 (5.5kW) – impeller diameter = 224 mm
 32-200/7.5 (7.5kW) – impeller diameter = 224 mm

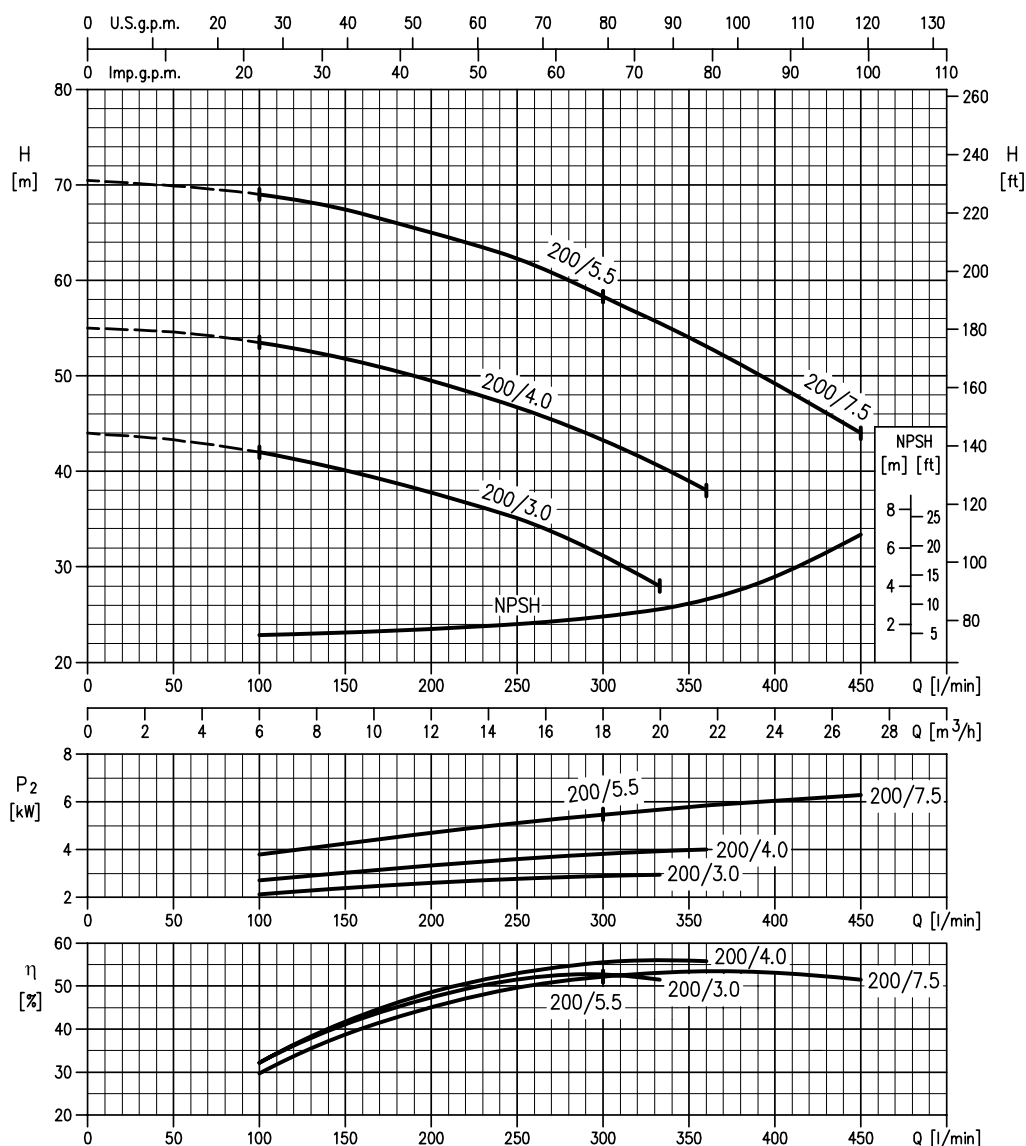


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

40-125/1.5 (1.5kW) – impeller diameter = 125 mm
 40-125/2.2 (2.2kW) – impeller diameter = 140 mm

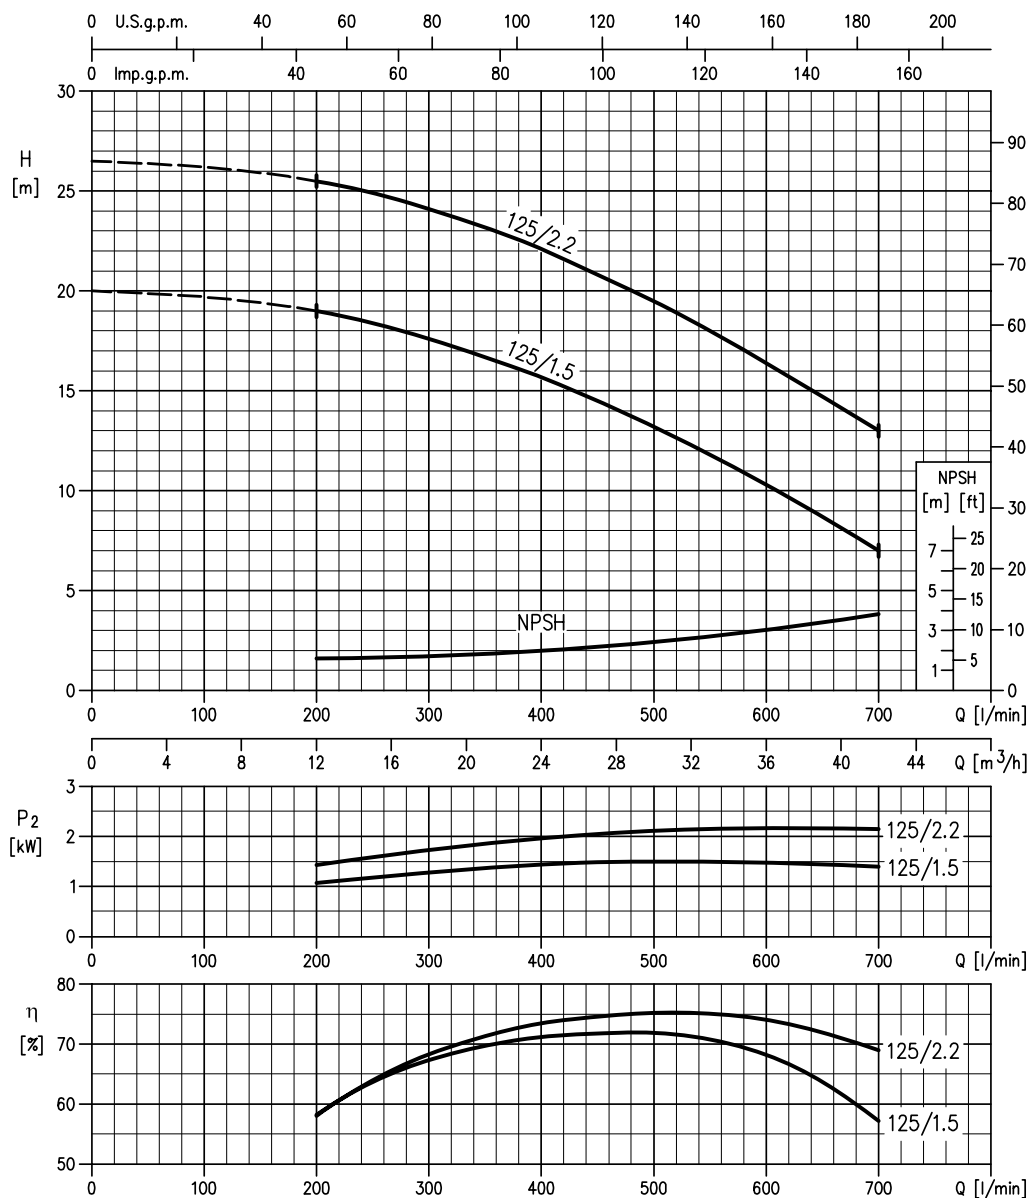


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

40-160/3 (3.0kW) – impeller diameter = 151 mm

40-160/4 (4.0kW) – impeller diameter = 166 mm

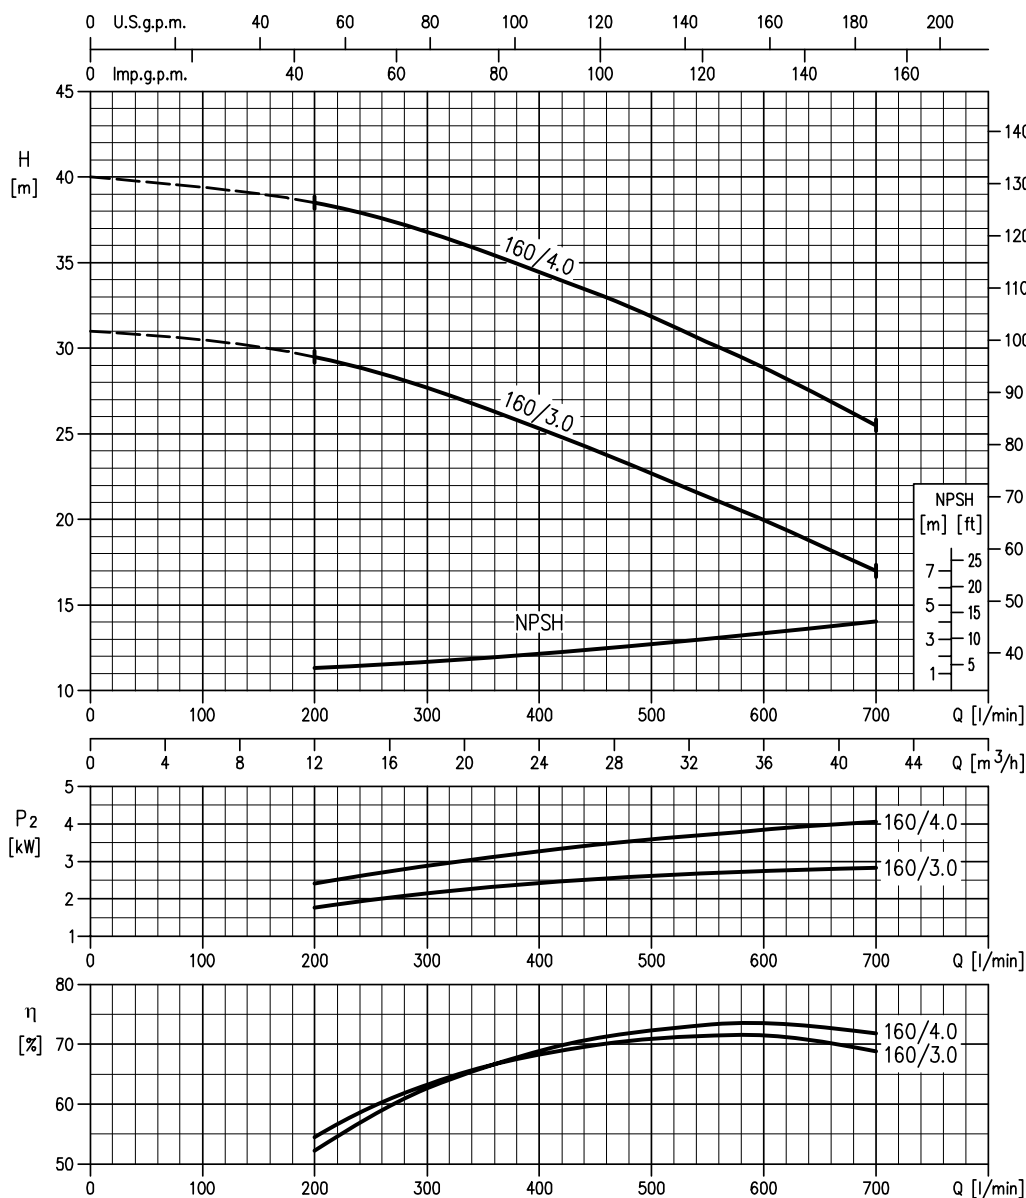

Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A


PERFORMANCE CURVE**50 Hz**

Rev. H

40-200/5.5 (5.5kW) – impeller diameter = 183 mm

40-200/7.5 (7.5kW) – impeller diameter = 200 mm

40-200/11 (11kW) – impeller diameter = 224 mm

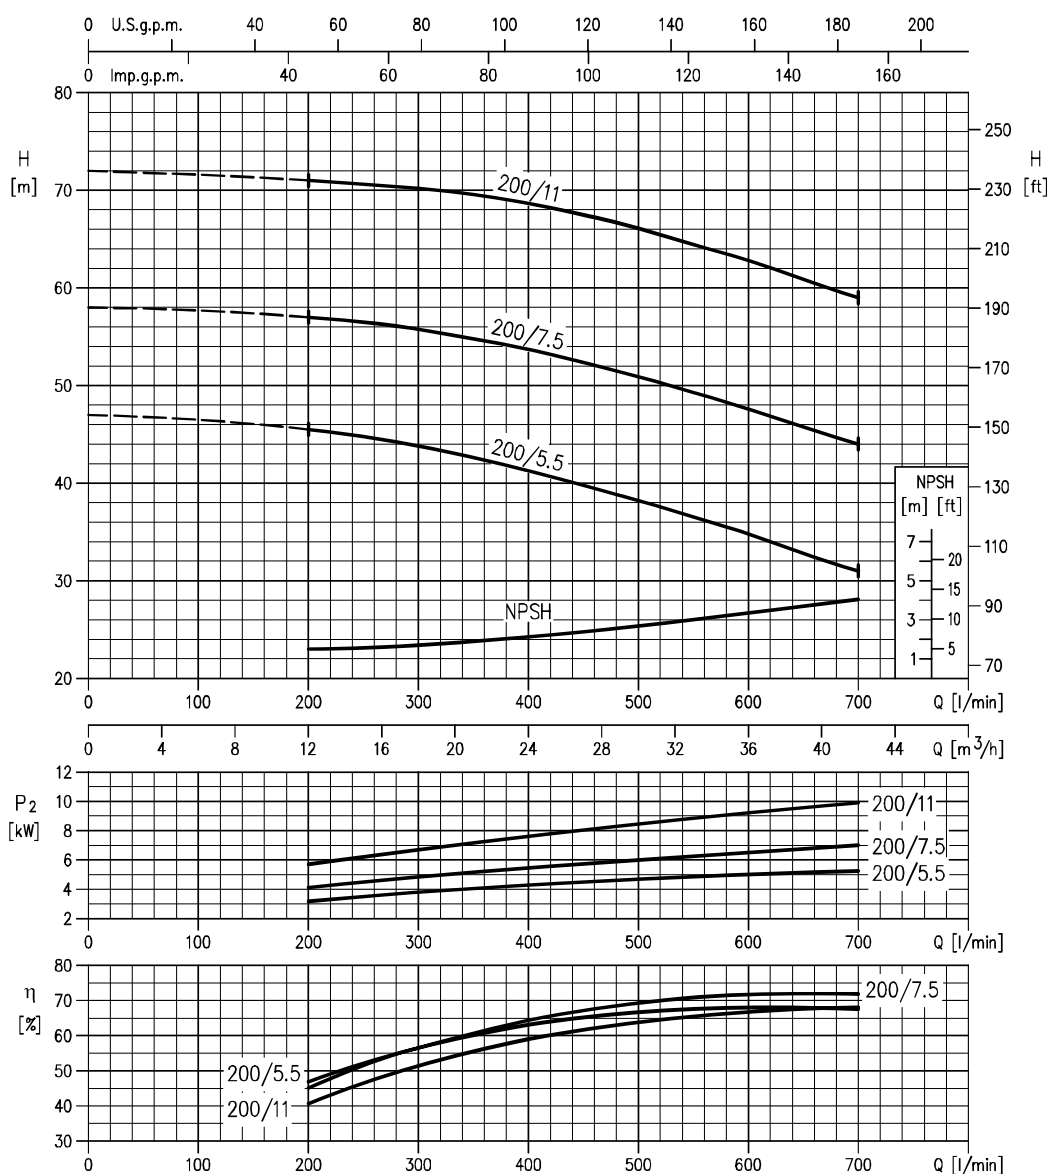


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

50-125/2.2 (2.2kW) – impeller diameter = 126 mm
 50-125/3 (3.0kW) – impeller diameter = 131 mm
 50-125/4 (4.0kW) – impeller diameter = 140 mm

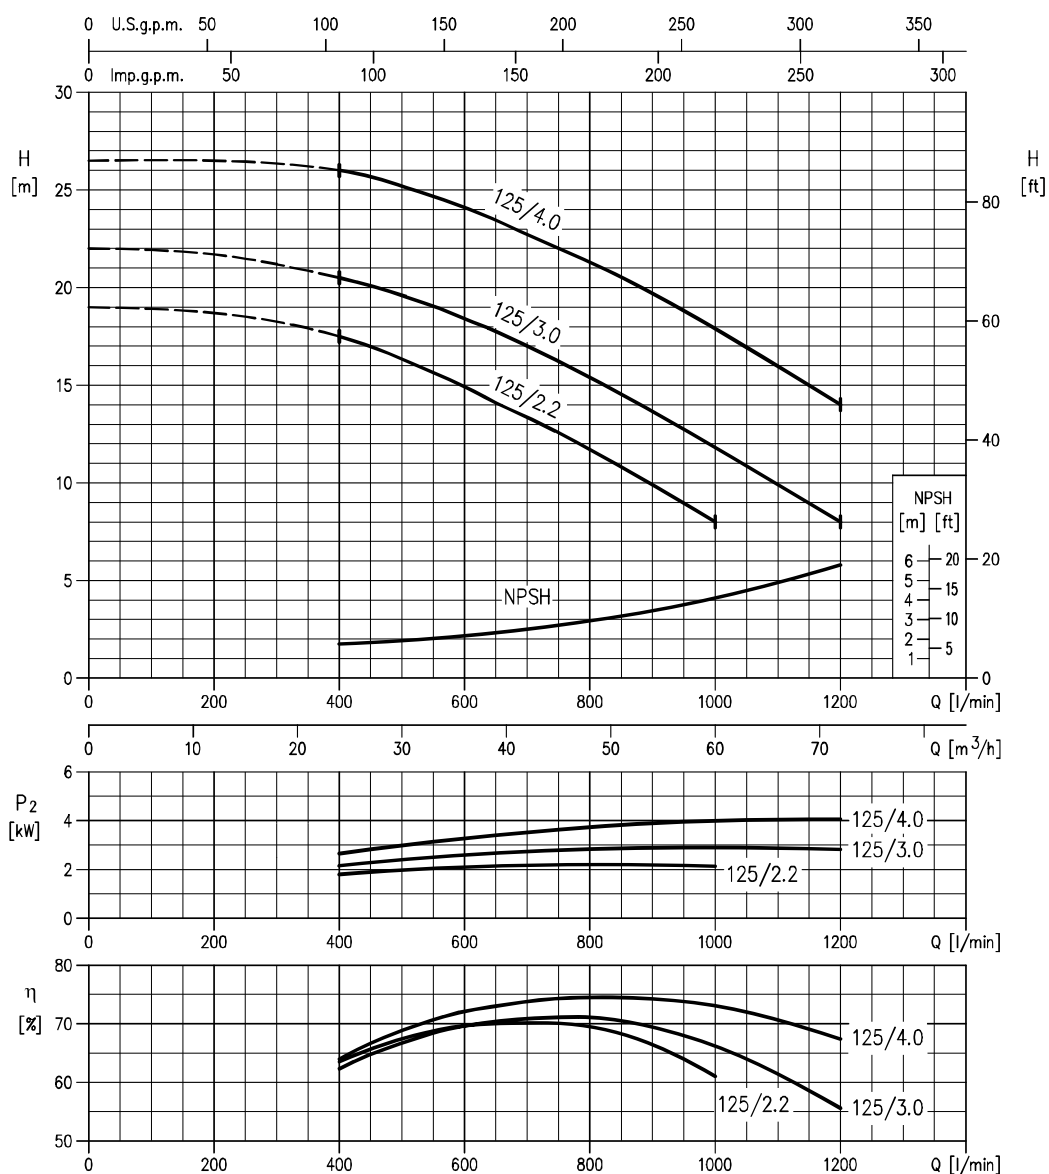


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

50-160/5.5 (5.5kW) – impeller diameter = 154 mm
 50-160/7.5 (7.5kW) – impeller diameter = 166 mm

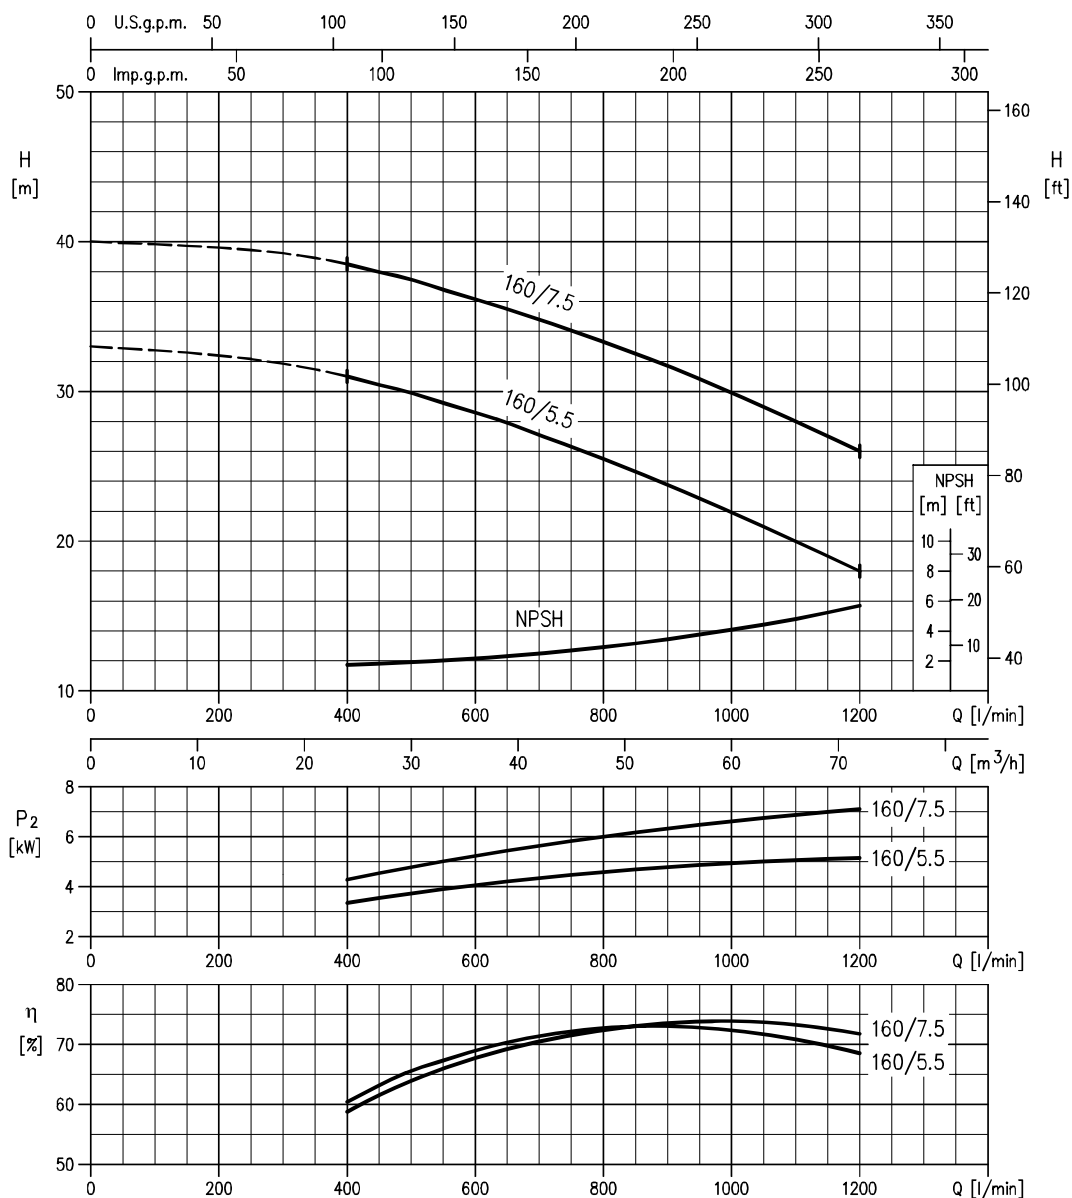


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

50-200/9.2 (9.2kW) – impeller diameter = 191 mm
 50-200/11 (11kW) – impeller diameter = 200 mm
 50-200/15 (15kW) – impeller diameter = 224 mm

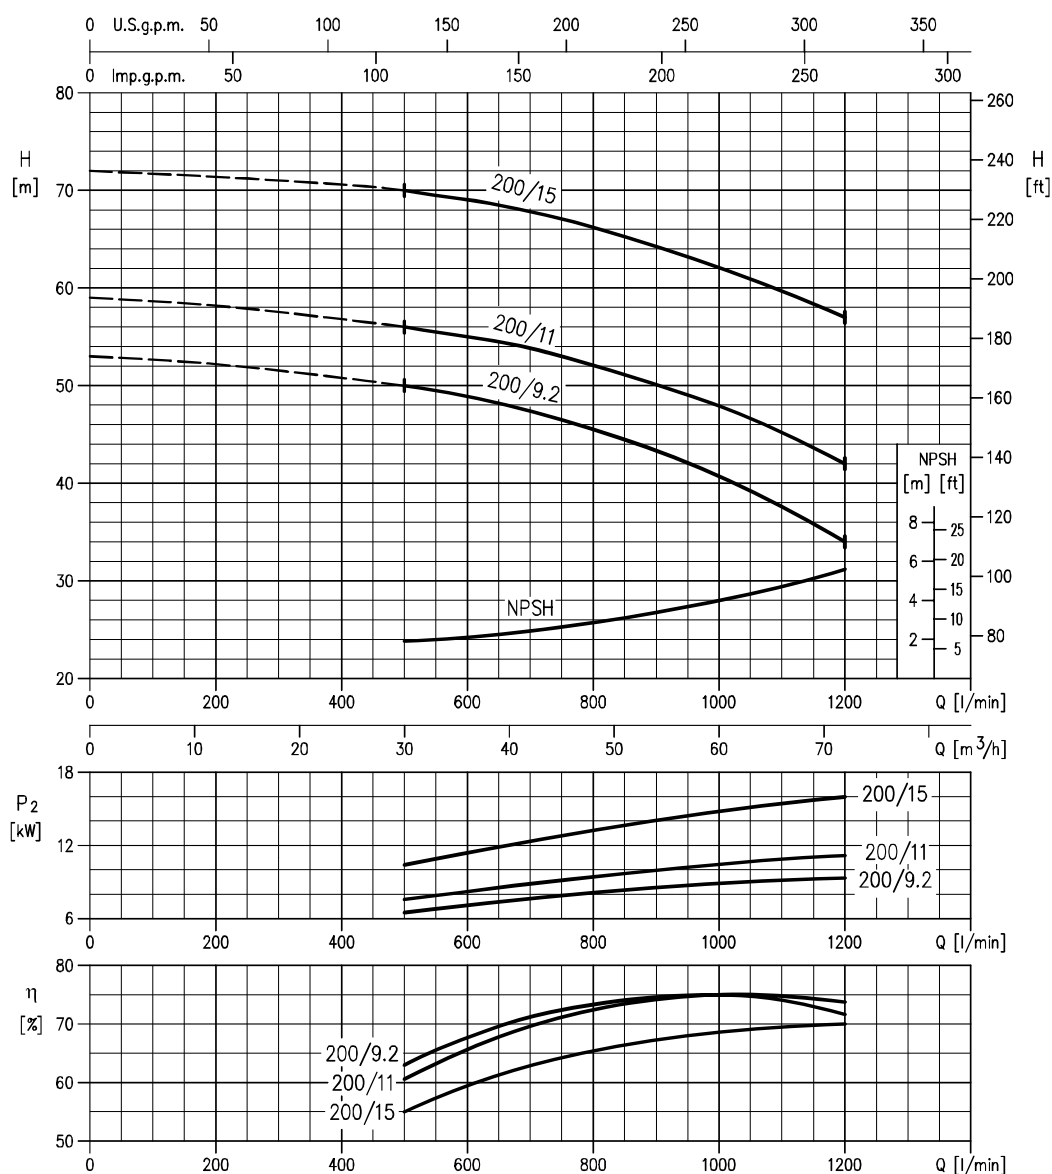


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

65-125/4 (4.0kW) – impeller diameter = 128 mm
 65-125/5.5 (5.5kW) – impeller diameter = 138 mm
 65-125/7.5 (7.5kW) – impeller diameter = 149 mm

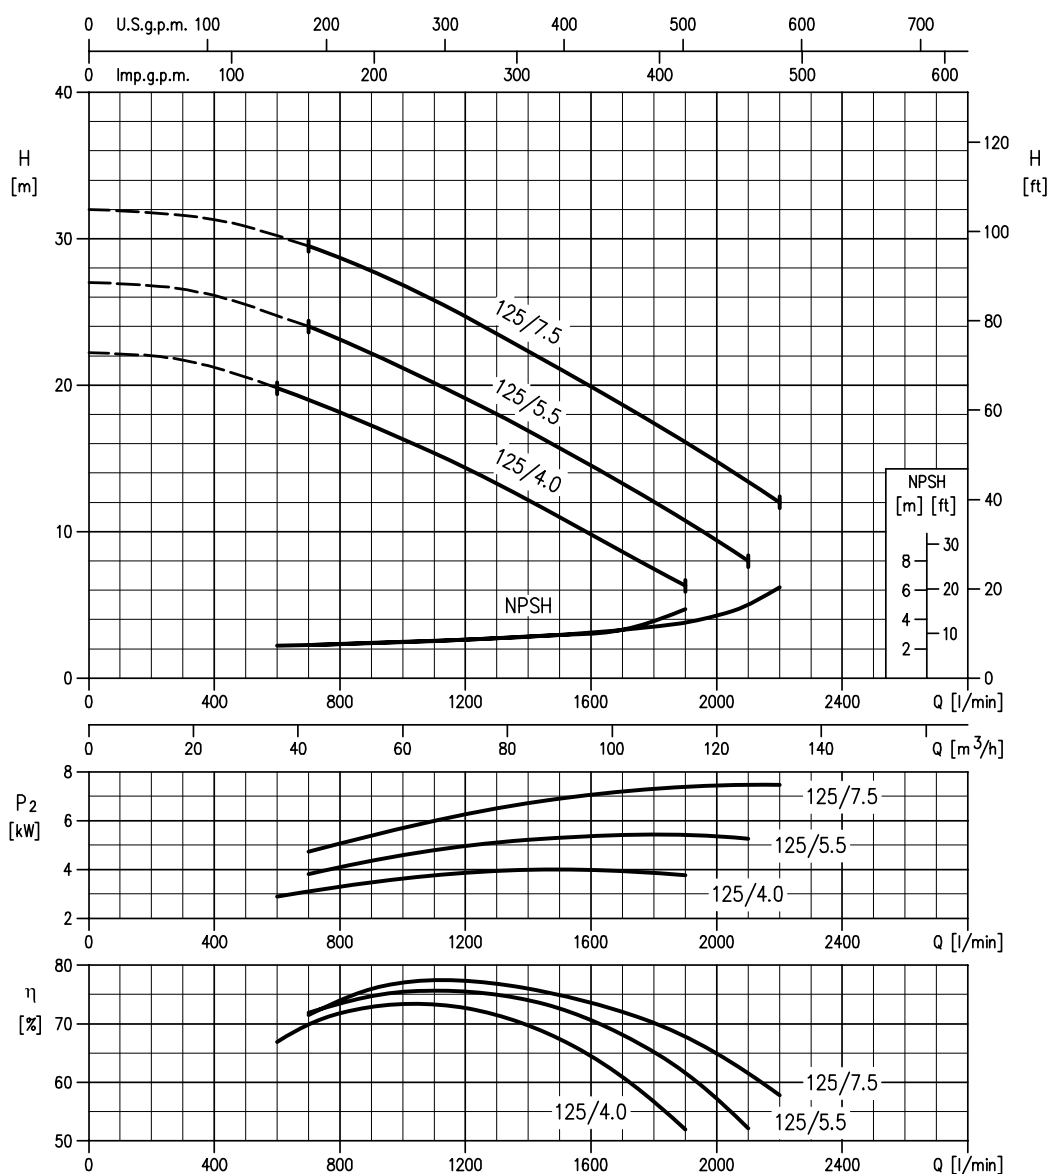


Rotation speed ≈2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE

50 Hz

Rev. H

65-160/7.5 (7.5kW) – impeller diameter = 153 mm
 65-160/9.2 (9.2kW) – impeller diameter = 161 mm
 65-160/11 (11kW) – impeller diameter = 168 mm
 65-160/15 (15kW) – impeller diameter = 178 mm

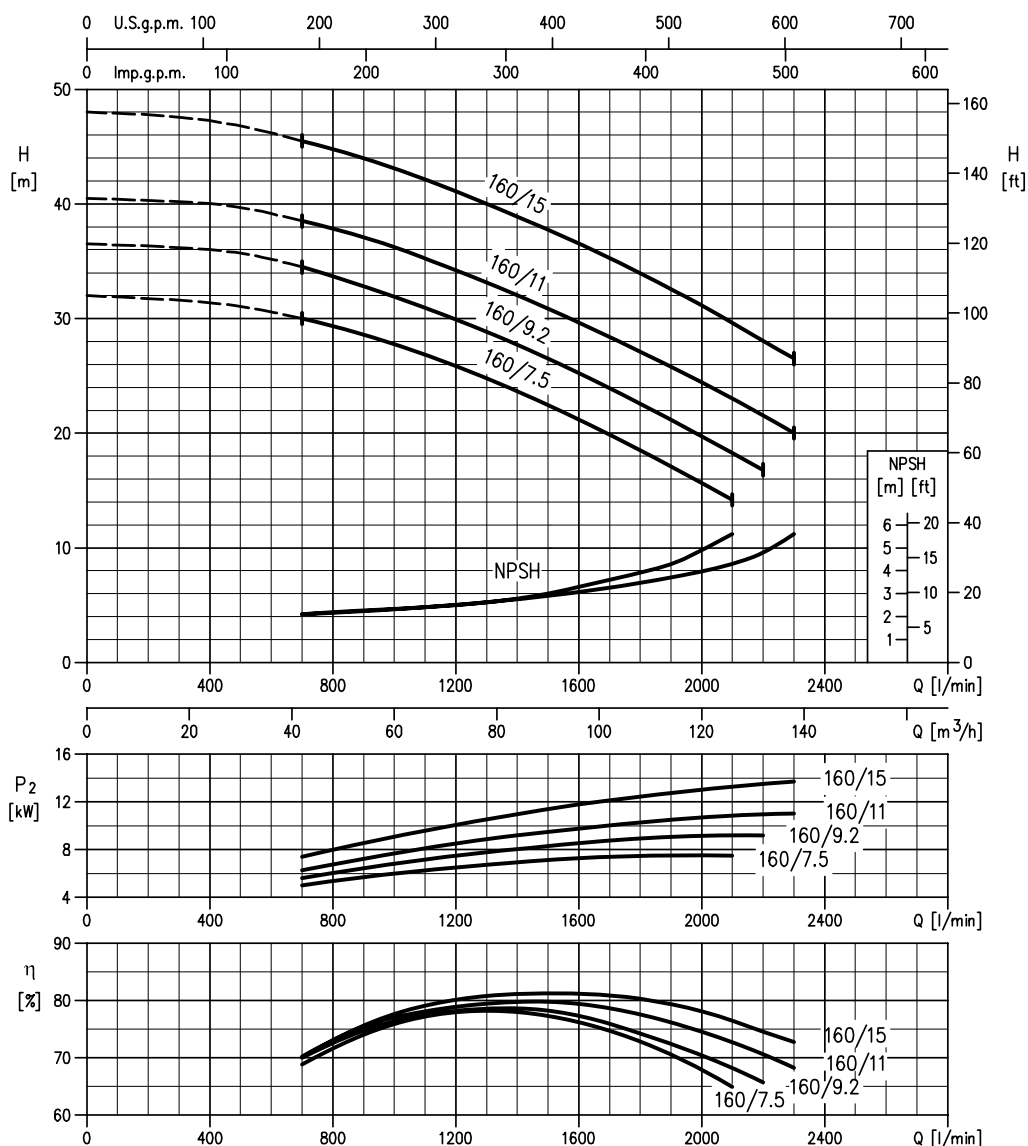


Rotation speed $\approx 2900 \text{ min}^{-1}$
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE

50 Hz

Rev. H

65-200/15 (15kW) – impeller diameter = 190 mm
 65-200/18.5 (18.5kW) – impeller diameter = 201 mm
 65-200/22 (22kW) – impeller diameter = 212 mm

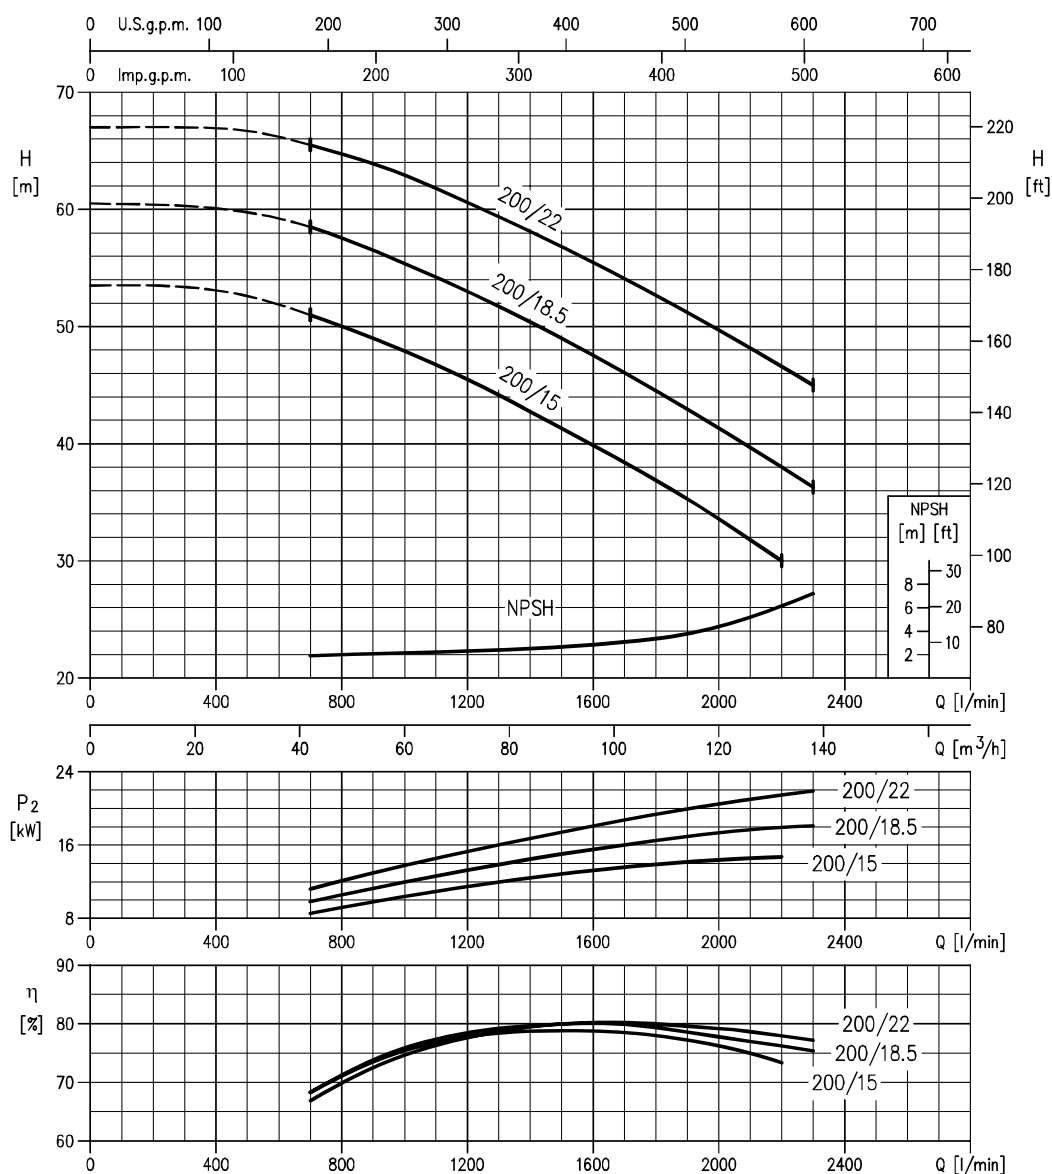


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

65-250/30 (30kW) – impeller diameter = 235 mm
 65-250/37 (37kW) – impeller diameter = 250 mm

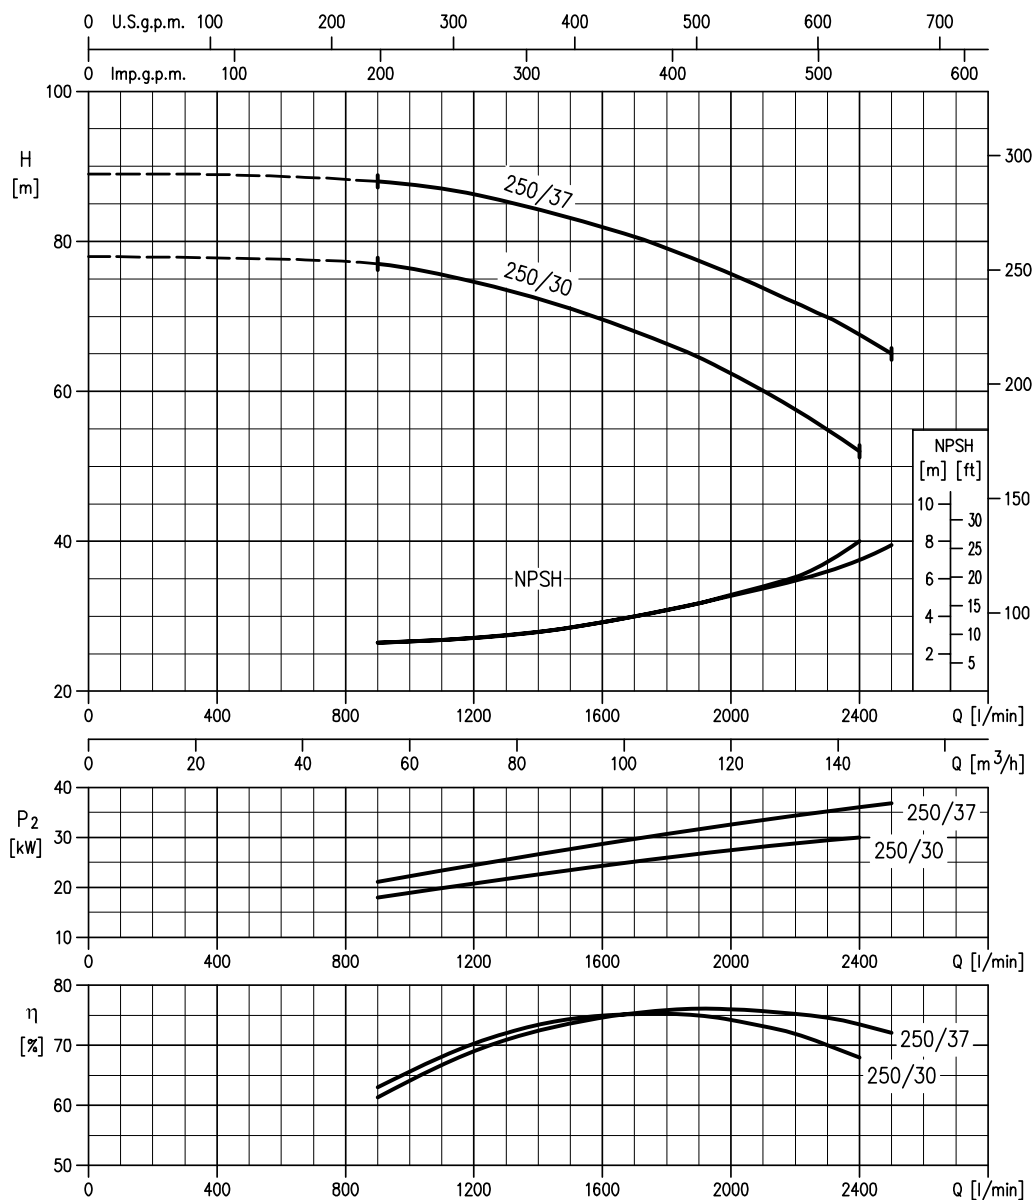


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

80-160/11 (11kW) – impeller diameter = 154 mm
 80-160/13 (13kW) – impeller diameter = 160 mm
 80-160/15R (15kW) – impeller diameter = 160 mm
 80-160/15 (15kW) – impeller diameter = 165 mm
 80-160/18.5 (18.5kW) – impeller diameter = 174 mm

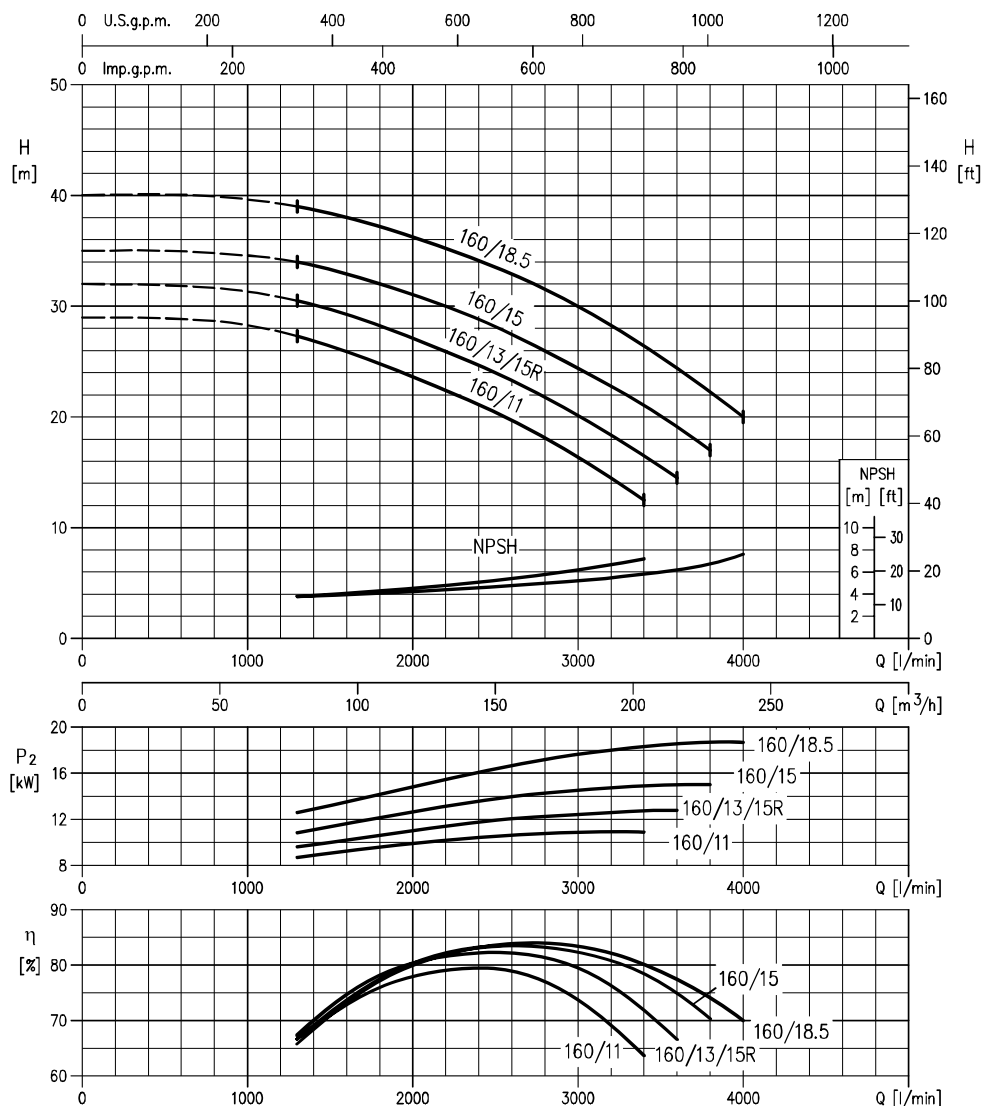


Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

PERFORMANCE CURVE**50 Hz**

Rev. H

80-200/22 (22kW) – impeller diameter = 196 mm
 80-200/30 (30kW) – impeller diameter = 211 mm
 80-200/37 (37kW) – impeller diameter = 219 mm

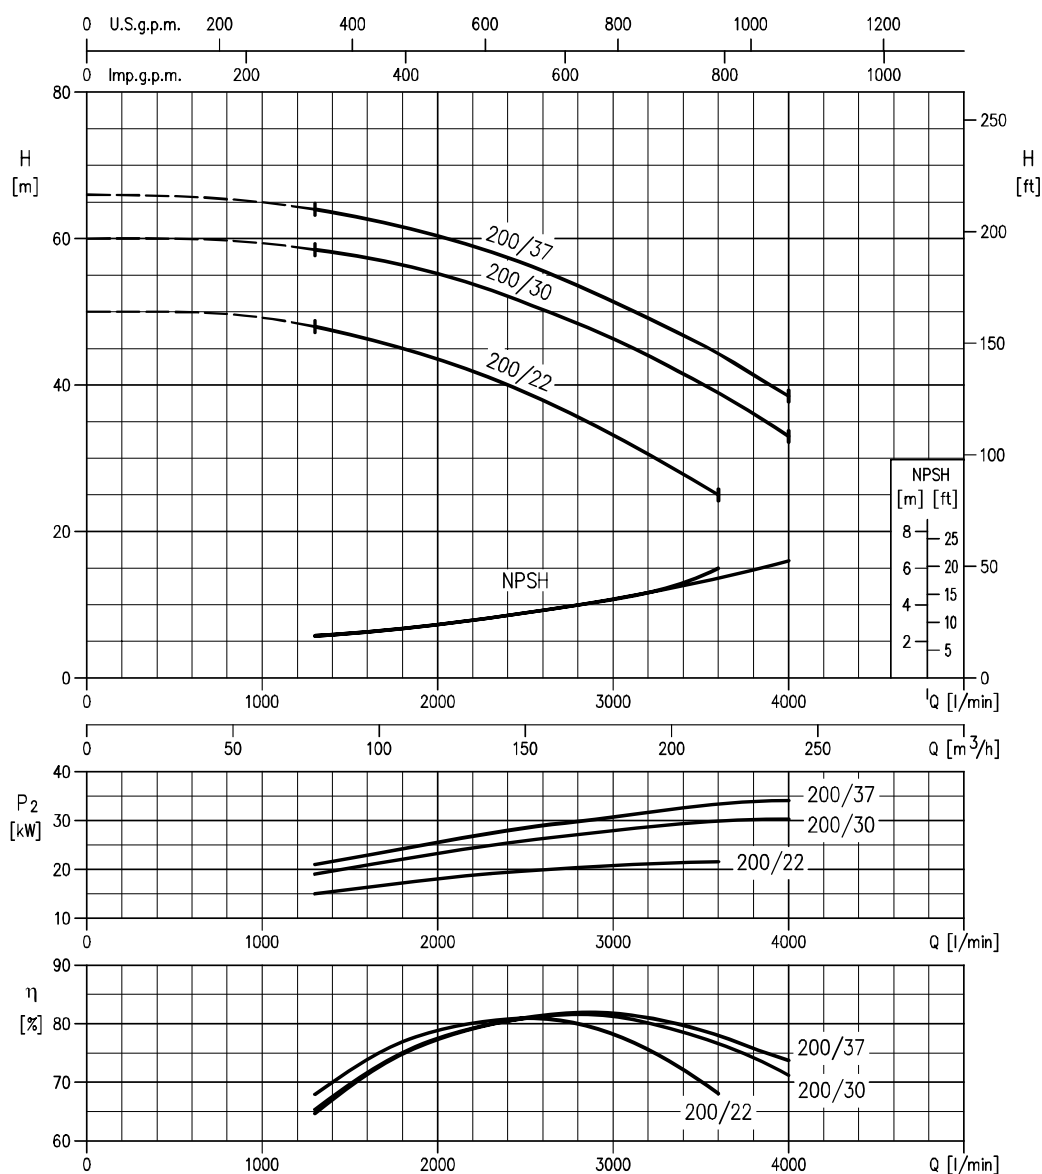


Rotation speed $\approx 2900 \text{ min}^{-1}$
 Test standard : ISO 9906 Annex A



PERFORMANCE CURVE**50 Hz**

Rev. H

80-250/37 (37kW) – impeller diameter = 230 mm
 80-250/45 (45kW) – impeller diameter = 245 mm
 80-250/55 (55kW) – impeller diameter = 259 mm

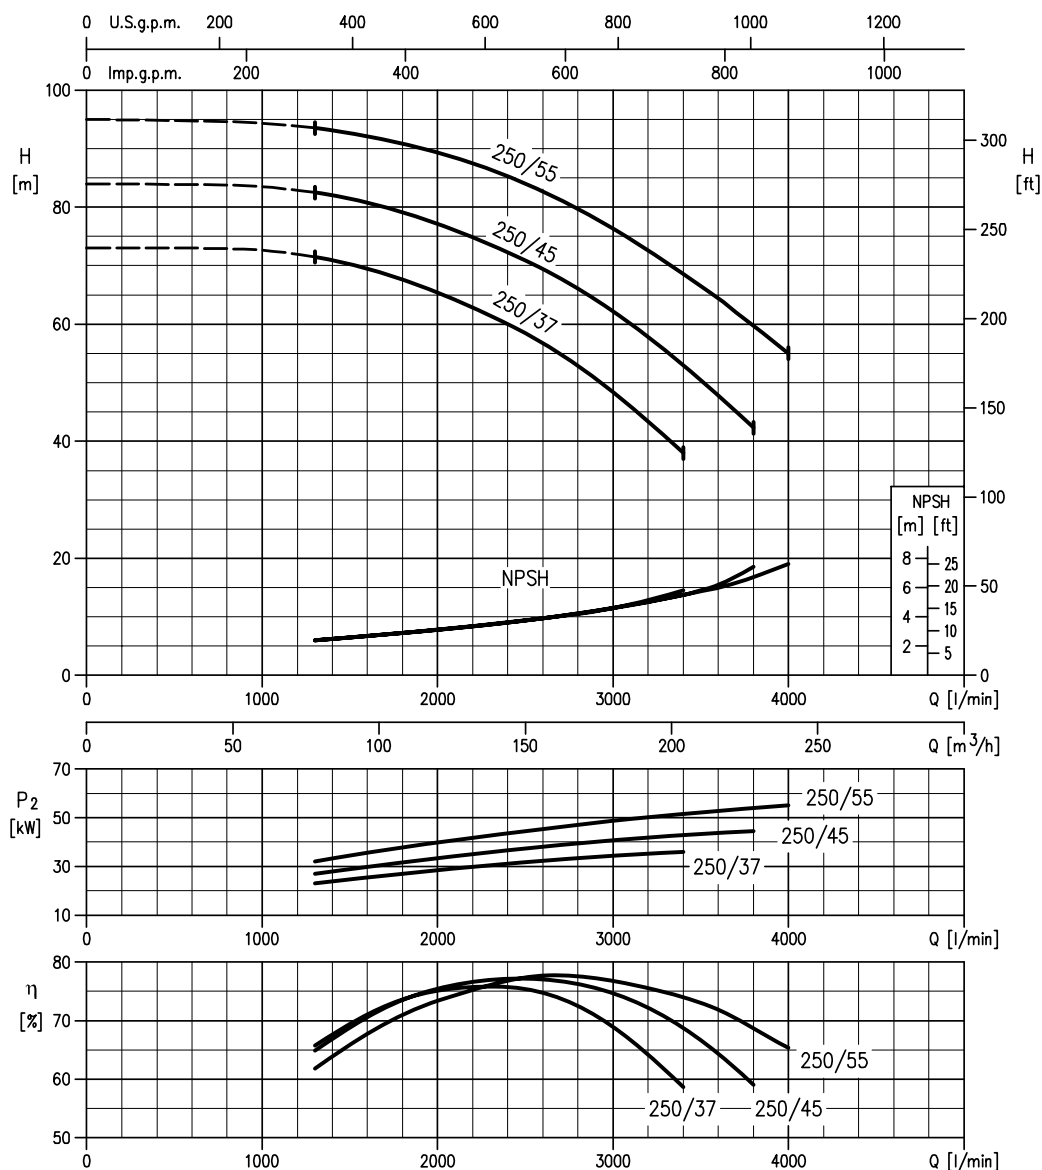

Rotation speed ≈ 2900 min⁻¹
 Test standard : ISO 9906 Annex A

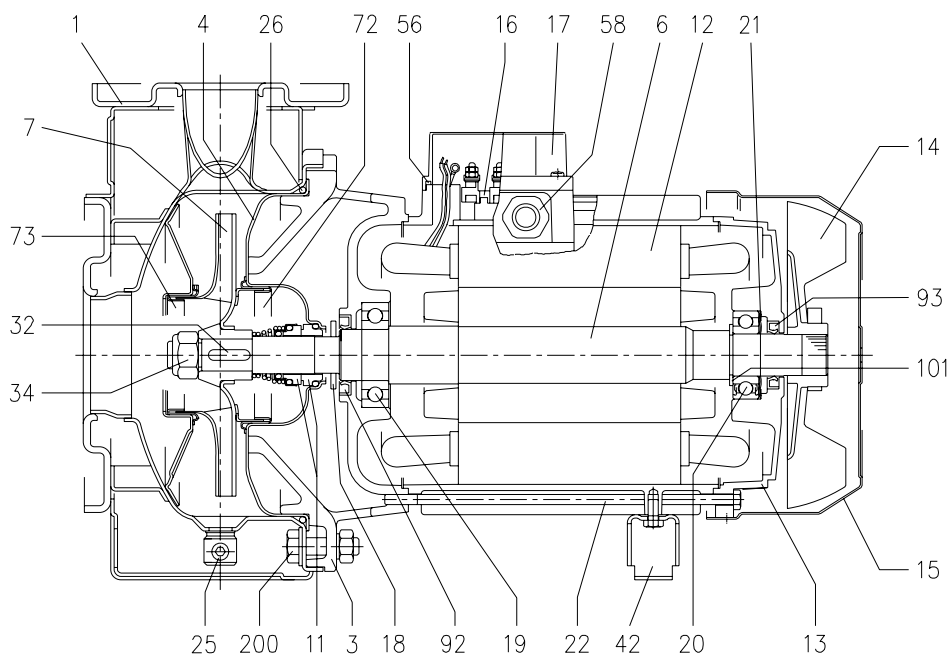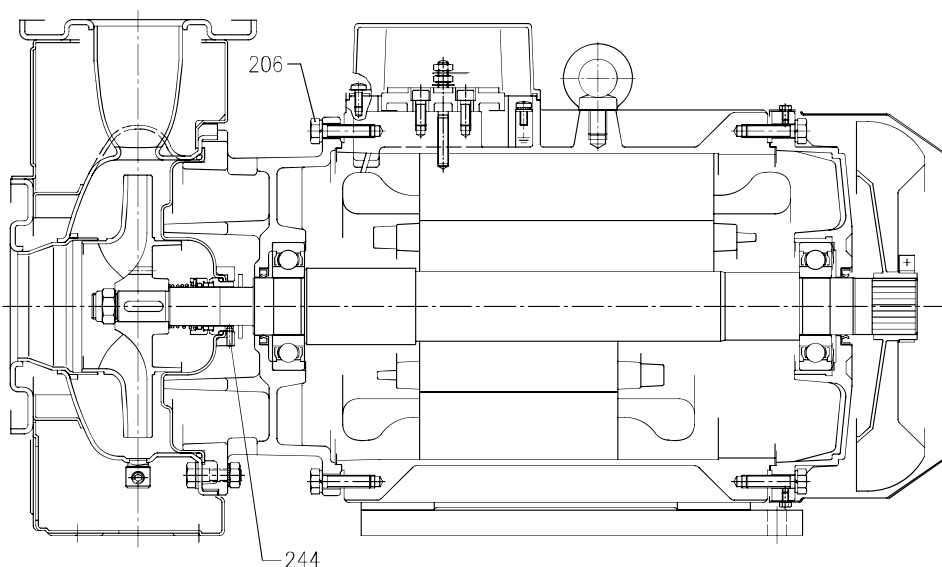**UP TO 11 kW****15 kW AND ABOVE**

N°	PART NAME		MATERIAL		DIMENSIONS	STANDARD	N. FOR 1 UNIT
			3M	3LM			
001	Casing		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
003	Motor bracket		Cast iron EN-GJL-200-EN 1561				1
004	Casing cover		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
006	Shaft with rotor-Part in contact with liquid		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
007	Impeller		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
011	Mechanical seal		Carbon/Ceramic/NBR Carbon/Ceramic/FPM (H option) SiC/SiC/FPM (HS option)	SiC/SiC/FPM	See p. 321-325		1
012	Motor frame with stator		-				1
013	Motor cover		Aluminium				1
014	Fan		Poliammide				1
015	Fan cover		Fe P04 Zinc-coated				1
016	Terminal		-				1
017	Terminal box cover		Aluminium (three phase version)				1
018	Splash ring	Up to 11 kW 15 kW and above	NBR	/	40x21.5x3 50x29.5x3	EBARA DRAWING	[1]
019	Bearing		-		See table p.319		1
020	Bearing		-		See table p.319		1
021	Adjusting ring		Steel C70				1
022	Tie rod	Up to 3 kW	Fe 42 Zinc-coated		M5	EBARA DRAWING	4
		For 4 - 5.5 - 7.5 kW			M6		
		9.2 e 11kW			M8		
		Screw			15 kW and above		
25	Draining plug		EN 1.4401 (AISI 316) / PTFE		R 1/8" L=8	DIN 906	1
026	"O" ring	32-125, 40-125	NBR FPM (H-HS option)	FPM	158.11x5.34	OR 6625	1
		32-160, 40-160, 50-125, 65-160			183.52x5.34	OR 6720	
		32-200, 40-200,50-160, 50-200, 65-160, 65-200			227.96x5.34	OR 6895	
032	Key	Up to 11 kW 15 kW and above	EN 1.4401 (AISI 316)		A 6x6x25 A 8x7x30	UNI 6604	1
034	Impeller nut	Up to 11kW	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)	M16x1.5	UNI 7474	1
		50-200/15			M18x1.5		
		15 kW and above			M20x1.5		
042	Foot		Aluminium / Zinc-coated steel			EBARA DRAWING	[2]
056	Box gasket		NBR				1
058	Fastening nut		-				[3]
072	Casing ring [4]		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
073	Casing ring		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
092	Lip seal	Up to 3kW	-	-	25x40x7	DIN 3760 without spring	1
		From 4 to 7.5 kW			30x47X7		
		From 9.2 kW to 11 kW			40x55x7		
		From 15 kW to 22 kW			45x60x7		
093	Lip seal	Up to 4 kW	-	-	25x40x7	DIN 3760 without spring	1
		From 5.5 kW to 7.5 kW			30x47X7		
		From 9.2 kW to 11 kW			40x55x7		
		From 15 kW to 22 kW			45x60x7		
101	Snap ring (only 9.2 and 11kW)		Carbon tool steels TC 80		Ø 40	UNI 7435	1
200	Screw	32-125, 40-125	Stainless steel A2 70 class ISO 3506/1		M 8x30	UNI 5739	8
		40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200			M 10x35	UNI 5739	[5]
206	Screw for bracket [6]		Zn. Steel 8.8 strenght class ISO 898-1		M 10x40	UNI 5739	4
244	Pin [7]		-	EN 1.4301 (AISI 304)	4x15		1

Counterflange kit on request, see table p. 328-329

[1] Not for L version

[2] N° for 1 unit=0 for 65-160/15

N° for 1 unit=1 for 32-40-50 and 65 up to 11kW

N° for 1 unit=2 for 65-200/15, 65-200/18.5, 65-200/22

[3] N° for 1 unit=1 up to 11kW

N° for 1 unit=2 from 15kW to 22kW

[4] For version 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15

[5] N° for 1 unit=10 for 32-160, 40-160, 50-125, 65-125

N° for 1 unit=12 for 32-200, 40-200, 50-160, 50-200, 65-160, 65-200


[6] For 15kW and above

[7] Only for 65-160/15 and 65-200

CONSTRUCTIONS **3LM 80-160**

50 Hz

Rev. H

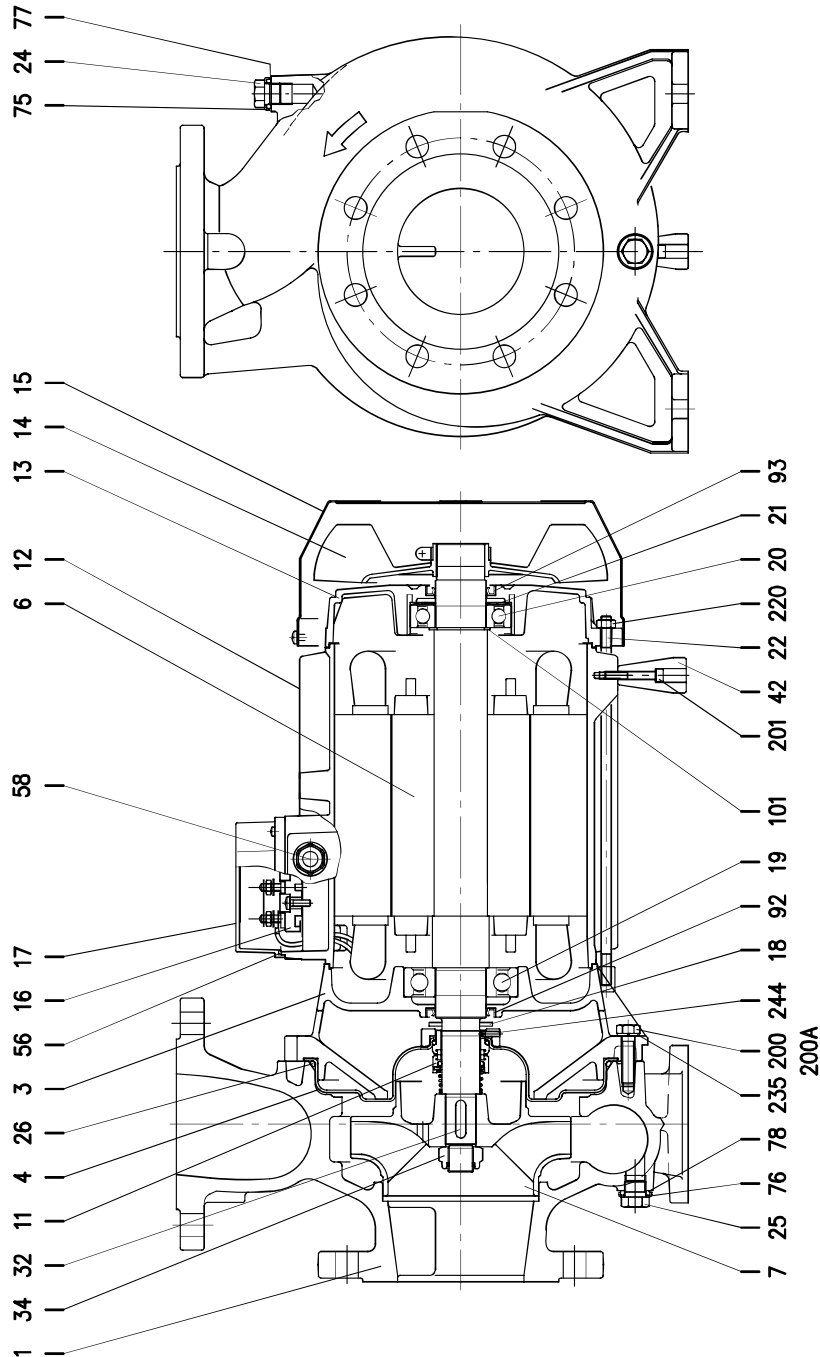


80-160/11 - 80-160/13

CONSTRUCTIONS **3LM 80-160**

50 Hz

Rev. H

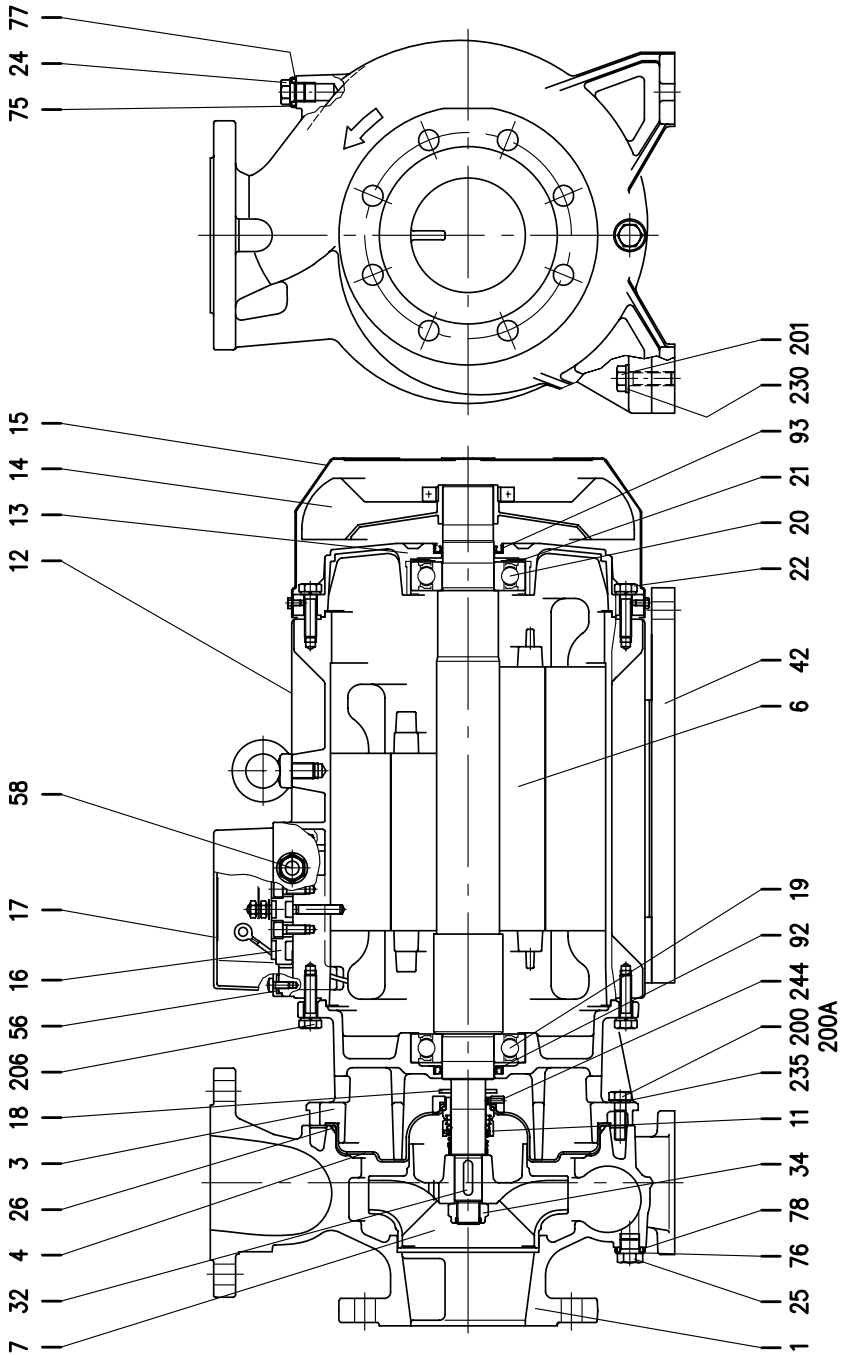

80-160/15 - 80-160/18.5

CONSTRUCTIONS 3LM 80-160


50 Hz


Rev. H

N°	PART NAME	MATERIAL	DIMENSIONS	STANDARD	N. FOR 1 UNIT	
001	Casing	EN 1.4401 (AISI 316)			1	
003	Motor bracket	Cast iron EN-GJL-200-EN 1561			1	
004	Casing cover	EN 1.4404 (AISI 316L)			1	
006	Shaft with rotor	EN 1.4404(AISI 316L) -Part in contact with liquid			1	
007	Impeller	EN 1.4401 (AISI 316)			1	
011	Mechanical seal	SiC/SiC/FPM Ceramic/Carbon/FPM (H option) SiC/Carbon/EPDM (E option)	See p. 321-325		1	
012	Motor frame with stator	-			1	
013	Motor cover	Aluminium			1	
014	Fan	Pollamide			1	
015	Fan cover	Fe P04 Zinc-coated			1	
016	Terminal	-			1	
017	Terminal box cover	Aluminium			1	
018	Splash ring	NBR	50x29.5x3	EPE DRAWING	1	
019	Bearing	-	See table p. 319		1	
020	Bearing	-	See table p. 319		1	
021	Adjusting ring	Steel C70			1	
022	Screw	Zn. Steel 8.8 strenght class ISO 898/1		EPE DRAWING	4	
024	Plug	EN 1.4404 (AISI 316L)	G 3/8	EPE DRAWING	1	
025	Plug	EN 1.4404 (AISI 316L)	G 3/8	EPE DRAWING	1	
026	"O" ring	FPM	227.96x5.34	OR 6895	1	
032	Key	EN 1.4404 (AISI 316L)	8x7x30	UNI 6604	1	
034	Impeller nut	Aluminium	M20x1.5	UNI 7474	1	
042	Foot	Aluminium		EPE DRAWING	[1]	
056	Box gasket	NBR			1	
058	Fasting nut	-			[2]	
075	Washer (plug)	EN 1.4404 (AISI 316L)			1	
076	Washer (plug)				1	
077	O-ring (plug)	FPM			1	
078	O-ring (plug)	EPDM (E option)			1	
092	Lip seal	-	11 - 13 kW	40x55x7	DIN 3760	1
			15 - 18.5 kW	45x60x7	without spring	1
093	Lip seal	-	11 - 13 kW	40x55x7	DIN 3760	1
			15 - 18.5 kW	45x60x7	without spring	1
101	Snap ring (only 11 - 13 kW)	Carbon tool steels TC 80	Ø 40	UNI 7435	1	
200	Screw	Stainless steel A2-70 class ISO 3506/1	M 10x35	UNI 5739	10	
200A	Screw		M 10x30		2	
201	Screw	Stainless steel A2-70 class ISO 3506/1	11 - 13 kW	UNI 5739	1	
			15 - 18.5 kW		4	
206	Screw for bracket (only 15 - 18.5 kW)	Zincked steel 8.8 strenght class ISO 898/1	M 10x40	UNI 5739	4	
220	Nut for tie rod (only 11 - 13 kW)	Zincked steel	M10		4	
230	Washer	Zincked steel	11 - 13 kW	-	-	
			15 - 18.5 kW	13x24x2.5	UNI 6592	4
235	Washer	EN 1.4301(AISI 304)	10.5	UNI 8842	12	
244	Pin [3]	EN 1.4301(AISI 304)	4x15		1	

Counterflange kit on request, see p. 328-329

- [1] N° for 1 unit=1 for version 80-160/11 and 80-160/13
 N° for 1 unit=2 for version 80-160/15 and 80-160/18.5
- [2] N° for 1 unit=1 for version 80-160/11 and 80-160/13
 N° for 1 unit=2 for version 80-160/15 and 80-160/18.5
- [3] Not for H and E version

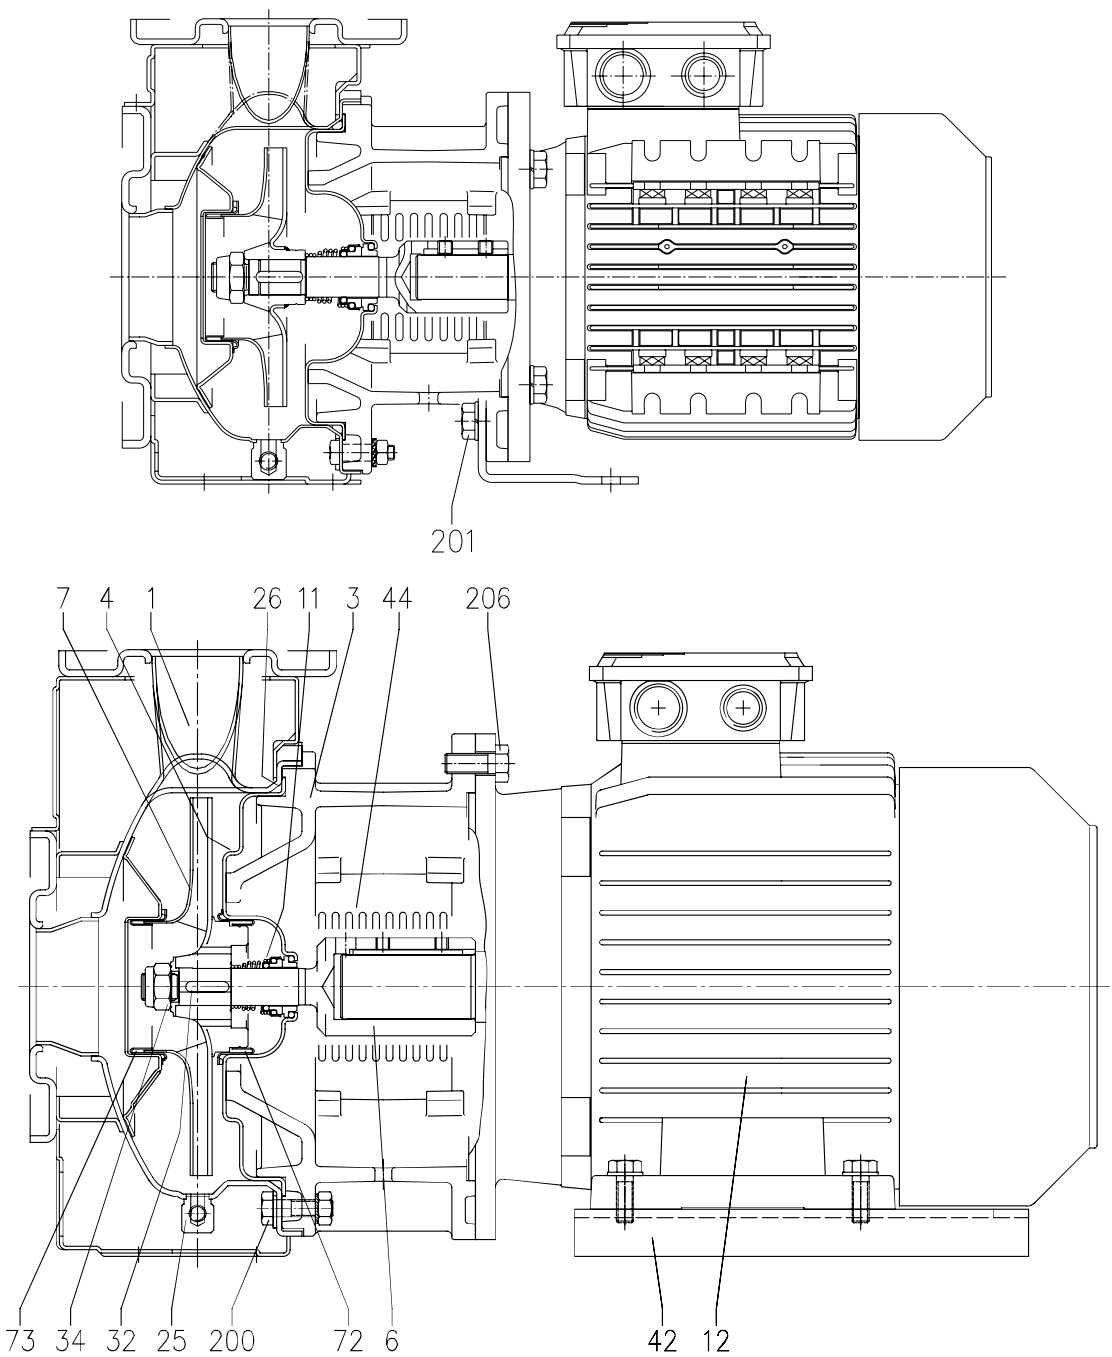

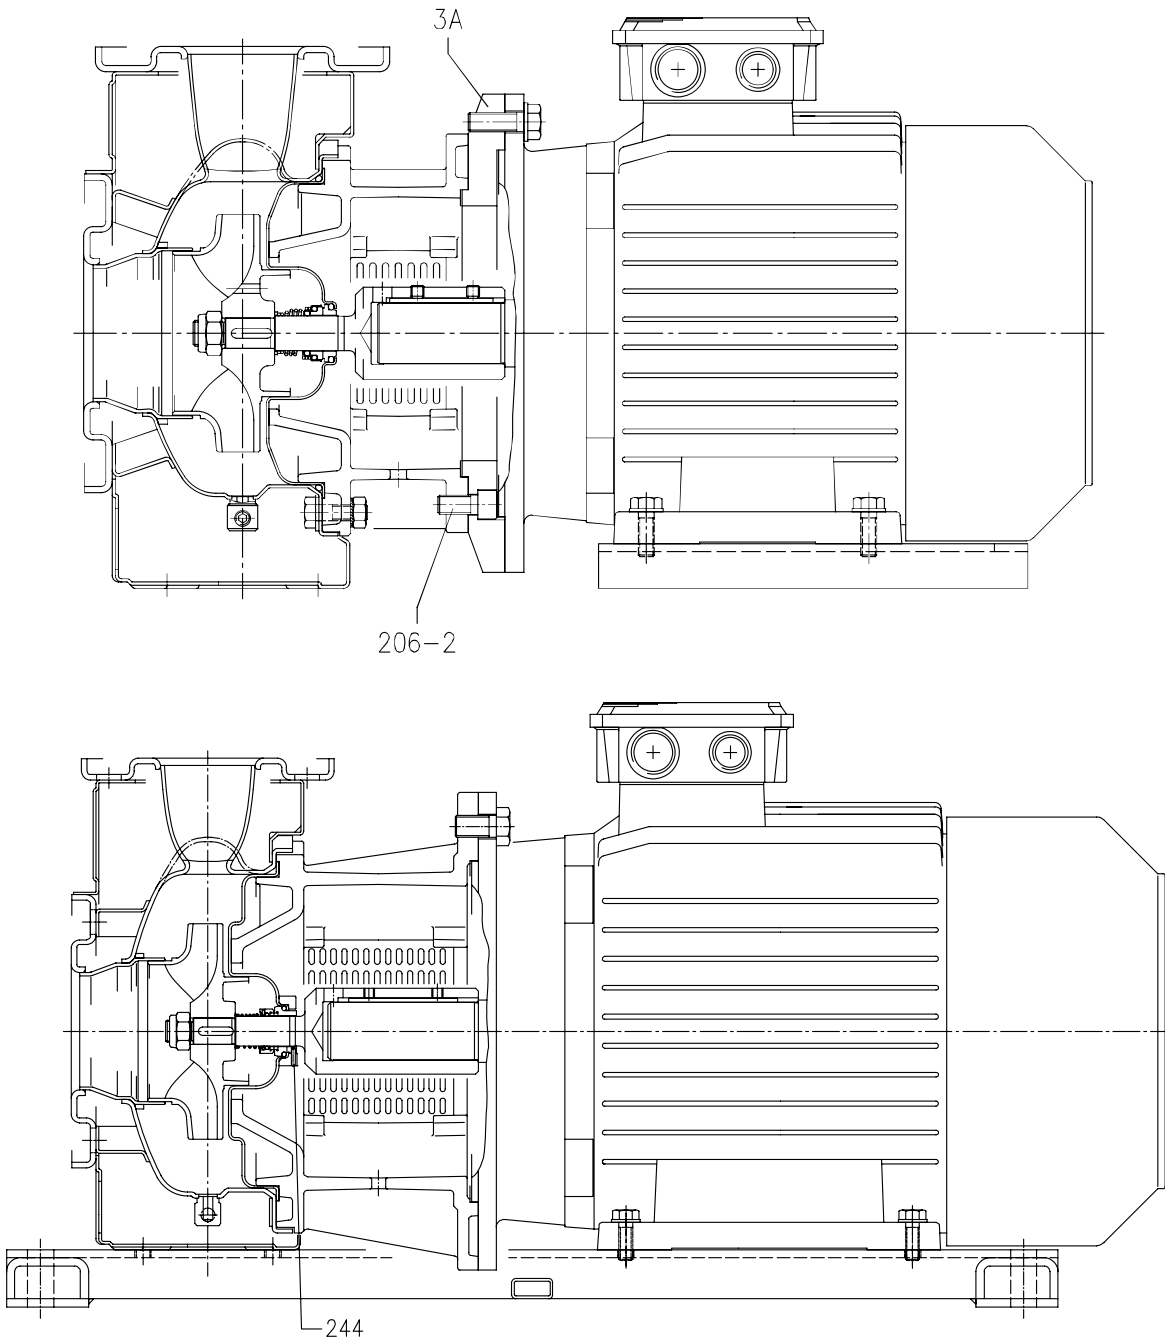

N°	PART NAME		MATERIAL		DIMENSIONS	STANDARD	N. FOR 1 UNIT
			3S	3LS			
001	Casing		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
003	Motor bracket		Cast iron EN-GJL-200-EN 1561				1
003A	Adapter ring [1]		Cast iron EN-GJL-200-EN 1561				1
004	Casing cover		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
006	Coupling - Part in contact with liquid		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)	See table p. 326		1
007	Impeller		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
011	Mechanical seal		Carbon/Ceramic/NBR Carbon/Ceramic/FPM (H option) SiC/SiC/FPM (HS option)	SiC/SiC/FPM	See p. 321-325		1
012	Motor		-				1
025	Drain plug		EN 1.4401 (AISI 316) / PTFE		R 1/8" L=8	DIN 906	1
026	"O" ring	32-125, 40-125	NBR FPM (version H and HS)	FPM	158.11x5.34	OR 6625	1
		32-160, 40-160, 50-125, 65-125			183.52x5.34	OR 6720	
		32-200, 40-200, 50-160, 50-200, 65-160, 65-200			227.96x5.34	OR 6895	
032	Key	Up to 11 kW	EN 1.4401 (AISI 316)		6x6x25	UNI 6604	1
		15 kW and above			8x7x30		
034	Impeller nut	Up to 11kW	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)	M16x1.5	UNI 7474	1
		50-200/15			M18x1.5		
		15 kW and above			M20x1.5		
042	Foot		Aluminium / Zinc-coated steel				[2]
044	Protection		EN 1.4301 (AISI 304)			EBARA DRAWING	1
072	Casing ring [3]		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
073	Casing ring (not for 65 version)		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
200	Screw	32-125, 40-125	Stainless steel A2 70 class ISO 3506/1		M 8x30	UNI 5739	8
		40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200			M 10x35	UNI 5739	[4]
201	Screw		Zn. Steel 8.8 strenght class ISO 898/1		M 10x16	UNI 5739	[5]
206	Screw for bracket		Zn. Steel 8.8 strenght class ISO 898/1		M 10x40	UNI 5739	4
206-2	Screw adapter ring [1]		Zn. Steel 8.8 strenght class ISO 898/1			UNI 5931	4
244	Pin [6]		-	EN 1.4301 (AISI 304)		UNI 5931	4

Counterflange kit on request see p. 328-329

[1] Only for version 65-125/5.5 and 65-125/7.5

[2] N° for 1 unit=0 for version 65-200/22

N° for 1 unit=1 for version for 32, 40, 50, 65-125/5.5, 65-125/7.5, 65-160/11, 65-160/15, 65-200/15, 65-200/18.5

N° for 1 unit=2 for version for 65-125/4, 65-160/7.5, 65-160/9.2

[3] Only for version 32-200, 40-200, 50-160, 50-200

[4] N° for 1 unit=10 for 32-160, 40-160, 50-125, 65-125

N° for 1 unit=12 for 32-200, 40-200, 50-160, 50-200, 65-160, 65-200


[5] Only for version 32-125/1.1, 32-160/1.5, 32-160/2.2, 40-125/1.5, 40-125/2.2, 50-125/2.2

[6] Only for 65-160/15, 65-200

CONSTRUCTIONS **3LS 80-160**

50 Hz

Rev. H

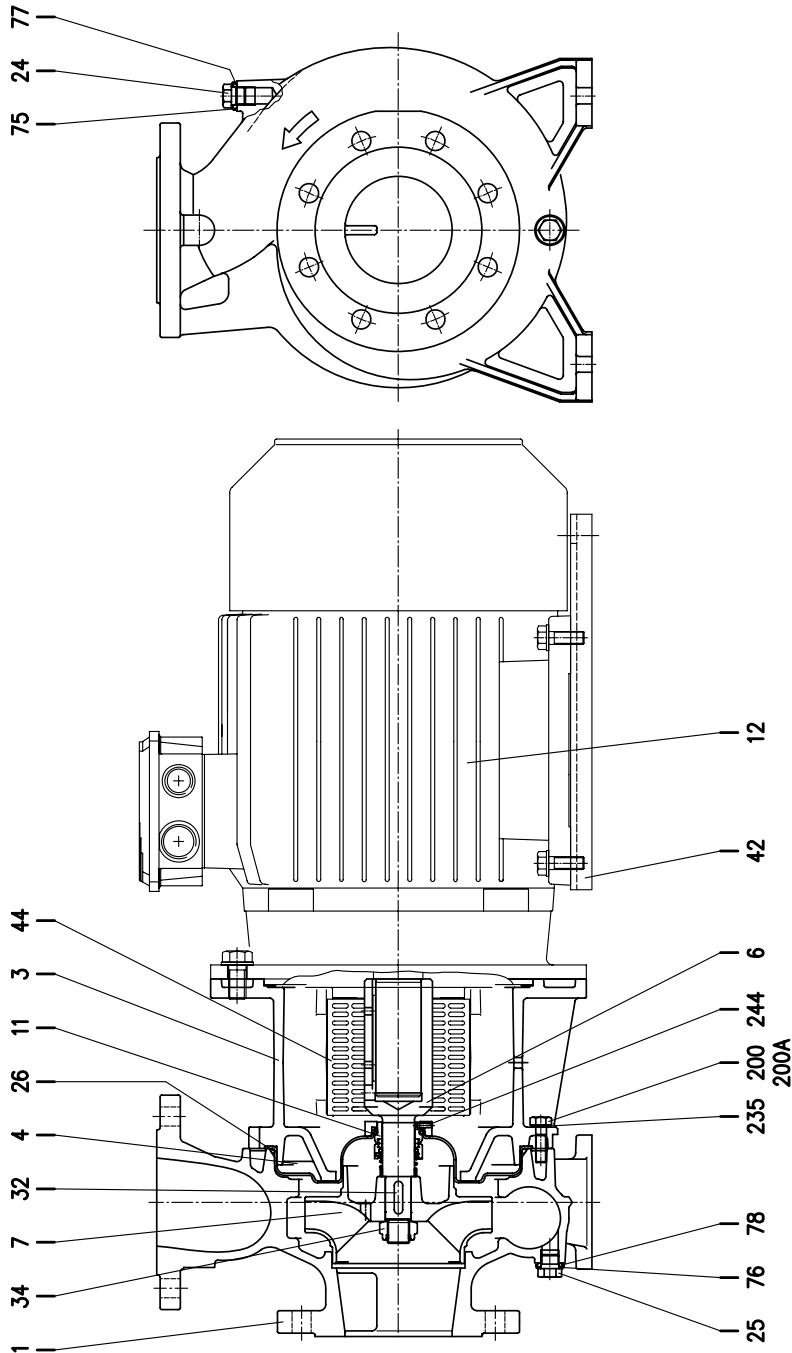

CONSTRUCTIONS 3LS 80-160


50 Hz

Rev. H

N°	PART NAME	MATERIAL	DIMENSIONS	STANDARD	N. FOR 1 UNIT
001	Casing	EN 1.4401 (AISI 316)			1
003	Motor bracket	Cast iron EN-GJL-200-EN 1561			1
004	Casing cover	EN 1.4404 (AISI 316L)			1
006	Coupling	EN 1.4404 (AISI 316L)	See table p. 326		1
007	Impeller	EN 1.4401 (AISI 316)			1
011	Mechanical seal	SiC/SiC/FPM Ceramic/Carbon/FPM (H option) SiC/Carbon/EPDM (E option)	See p. 321-325		1
012	Motor	-			1
024	Plug	EN 1.4404 (AISI 316L)	G3/8	EPE DRAWING	1
025	Plug	EN 1.4404 (AISI 316L)	G3/8	EPE DRAWING	1
026	"O" ring	FPM EPDM (E option)	227.96x5.34	OR 6895	1
032	Key	EN 1.4401 (AISI 316)	8x7x30	UNI 6604	1
034	Impeller nut	EN 1.4404 (AISI 316L)	M20x1.5	UNI 7474	1
042	Foot	Aluminium		EPE DRAWING	2
044	Protection	EN 1.4301 (AISI 304)		EPE DRAWING	2
075	Washer (plug)	EN 1.4404 (AISI 316L)			1
076	Washer (plug)				1
077	O-ring (plug)	FPM EPDM (E option)			1
078	O-ring (plug)				1
200	Screw	Stainless steel A2-70 class ISO 3506/1	M 10x35	UNI 5739	10
200A	Screw		M 10x30		2
235	Washer	EN 1.4301(AISI 304)	10.5	UNI 8842	12
244	Pin [1]	EN 1.4301(AISI 304)	4x15		1

Counterflange kit on request see p. 328-329

[1] Not for H and E version.

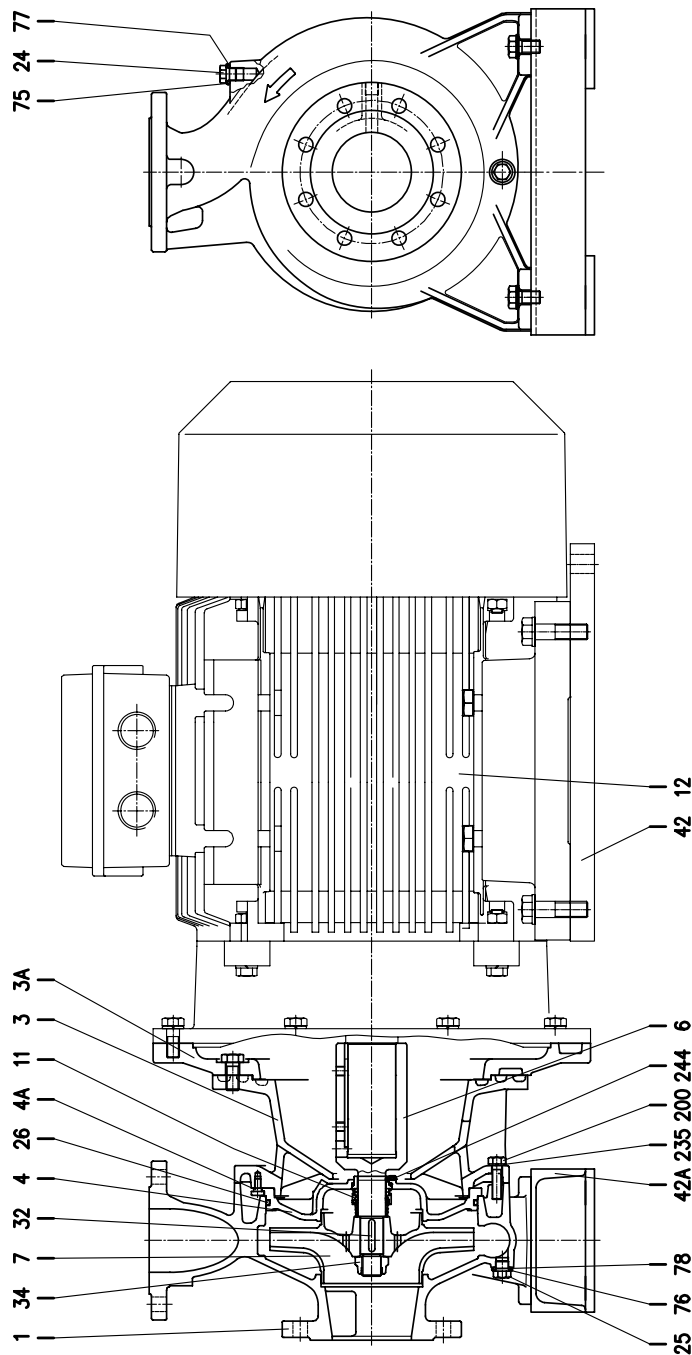

N°	PART NAME			MATERIAL	DIMENSIONS	STANDARD	N. FOR 1 UNIT
				3LS			
001	Casing			EN 1.4401 (AISI 316)			1
003	Motor bracket			Cast iron EN-GJL-200-EN 1561			1
003A	Adapter ring			Cast iron EN-GJL-200-EN 1561			[1]
004	Casing cover			EN 1.4401 (AISI 316)			1
004A	Screw for casing cover			EN 1.4301(AISI 304)			2
006	Coupling	65-250	d=24 mm	EN 1.4404 (AISI 316L) for 22 kW	See table p. 326		1
				EN 1.4462 (Duplex stainless steel) for 30-37 kW			1
		80-200	d=24 mm	EN 1.4404 (AISI 316L) for 22 kW			1
				EN 1.4462 (Duplex stainless steel) for 30-37 kW			1
		80-250	d=29 mm	EN 1.4462 (Duplex stainless steel)			1
007	Impeller			EN 1.4401 (AISI 316)			1
011	Mechanical seal			SIC/SIC/FPM Ceramic/Carbon/FPM (H option) Sic/Carbon/EPDM (E option)	See p. 321-325		1
012	Motor			-			1
024	Plug			EN 1.4404 (AISI 316L)	G3/8	EPE DRAWING	1
025	Plug			EN 1.4404 (AISI 316L)	G3/8	EPE DRAWING	1
026	"O" ring			FPM EPDM (E version)	253.36x5.34	OR 6995	1
032	Key	65-250	d=24 mm	EN 1.4401 (AISI 316)	8x7x30	UNI 6604	1
		80-200					1
		80-250	d=29 mm		8x7x40		1
034	impeller nut	65-250	d=24 mm	EN 1.4404 (AISI 316L)	M20x1.5	UNI 7474	1
		80-200					1
		85-250	d=29 mm		M24x2		1
042	Foot for motor			Aluminium		EPE DRAWING	[2]
042A	Foot for pump			Aluminium/zincked steel (only for 80-250/55)			[3]
075	Washer (plug)			EN 1.4404 (AISI 316L)			1
076	Washer (plug)						1
077	O-ring (plug)			FPM			1
078	O-ring (plug)			EPDM (E version)			1
200	Screw			Stainless steel A2-70 class ISO 3506/1	M 12x45	UNI 5739	10
235	Washer			EN 1.4301(AISI 304)	13	UNI 8842	10
244	Pin [4]			EN 1.4301(AISI 304)	4x12		1


Counterflange kit on request, see table p. 328-329

[1] Only for 65-250/37 , 80-200/37 , 80-250/37 – 80-250/45 and 80-250/55

[2] N° for 1 unit=2 for 80-250/55

[3] N° for 1 unit=2 for 80-200/30 , 80-200/37 , 80-250/45
for 1 unit=1 for 80-250/55


[4] Not for H and E version.

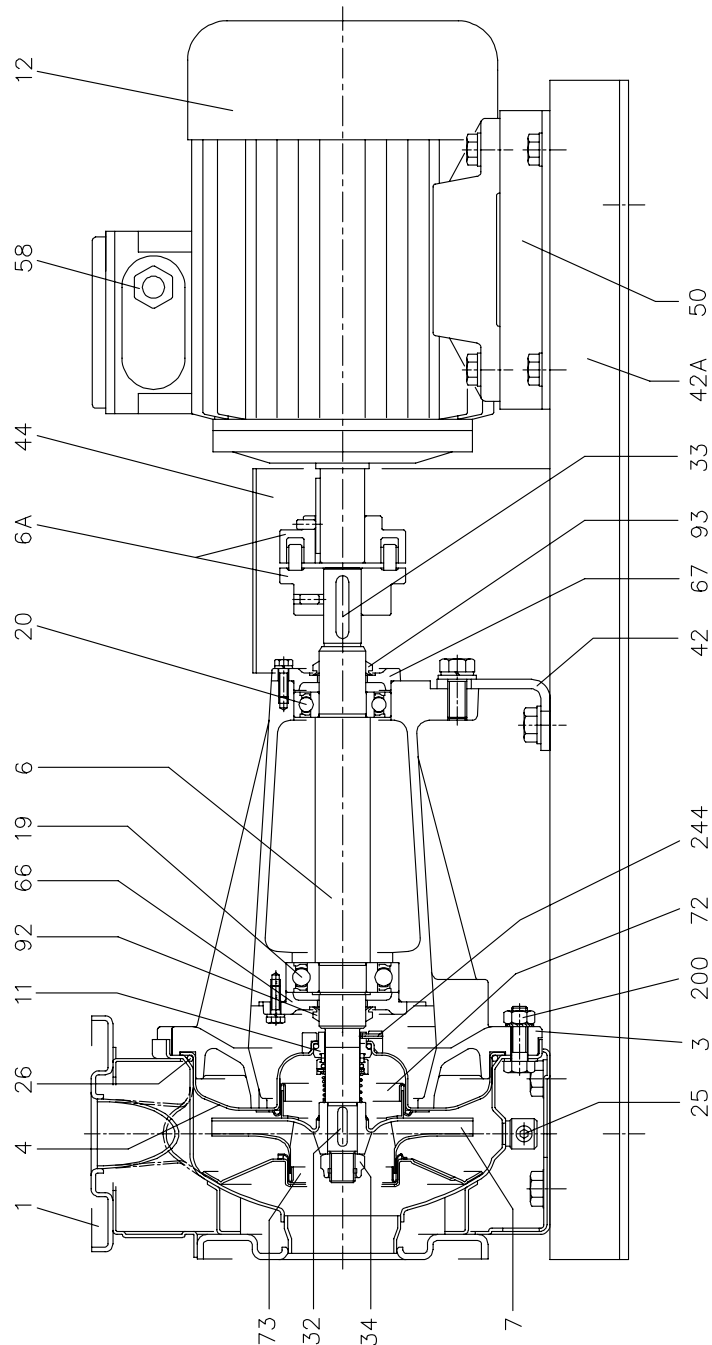



N°	PART NAME		MATERIAL		DIMENSIONS	STANDARD	N. FOR 1 UNIT
			3P	3LP			
001	Casing		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
003	Support		Cast iron EN-GJL-200-EN 1561				1
004	Casing cover		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
006	Shaft - Part in contact with liquid		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
006A	Flexible coupling		Cast iron EN-GJL-250-EN 1561		See table pag. 327		1
007	Impeller		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
011	Mechanical seal		Carbon/Ceramic/NBR Carbon/Ceramic/FPM (H option) SiC/SiC/FPM (E option)	SiC/SiC/FPM	See p. 321-325		1
012	Motor		-				1
019	Bearing		-		See table p. 320		1
020	Bearing		-		See table p. 320		1
025	Draining plug		EN 1.4401 (AISI 316) / PTFE		R 1/8" L=8	DIN 906	1
026	"O" ring	32-125, 40-125	NBR FPM (version H and HS)	FPM	158.11x5.34	OR 6625	1
		32-160, 40-160, 50-125, 65-125			183.52x5.34	OR 6720	
		32-200, 40-200, 50-160, 50-200, 65-160, 65-200			227.96x5.34	OR 6895	
032	Key	Up to 11 kW	EN 1.4401 (AISI 316)		6x6x25	UNI 6604	1
		15 kW and above			8x7x30		
033	Key		C 40		8x7x40	UNI 6604	1
034	Impeller nut	Up to 11kW	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)	M16x1.5	UNI 7474	1
		50-200/15			M18x1.5		
		15 kW and above			M20x1.5		
042	Pump support		Fe 37 Zinc-coated			EBARA DRAWING	1
42A	Base		Fe 37 Zinc-coated				1
044	Protection		Fe 37 Zinc-coated				1
050	Foot		Aluminium / Zinc-coated steel				1
058	Fastening nut		-				1
066	Impeller side bearing cover		Cast iron EN-GJL-200-EN 1561				1
067	Motor side bearing cover		Cast iron EN-GJL-200-EN 1561				1
072	Casing ring [1]		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
073	Casing ring (not for 65 version)		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
092	"V" ring		-		VS - 0030		1
093	"V" ring		-		VS - 0030		1
200	Screw	32-125, 40-125	Stainless steel A2 70 class ISO 3506/1		M 8x30	UNI 5739	8
		40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200			M 10x35	UNI 5739	[2]
244	Pin [3]		/	EN 1.4301 (AISI 304)	4x15		1

Counterflange kit on request see p. 328-329

- [1] For version: 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15
- [2] N° for 1 unit=10 for 32-160, 40-160, 50-125, 65-125
N° for 1 unit=12 for 32-200, 40-200, 50-160, 50-200, 65-160, 65-200
- [3] Only for 65-160/15 and 65-200

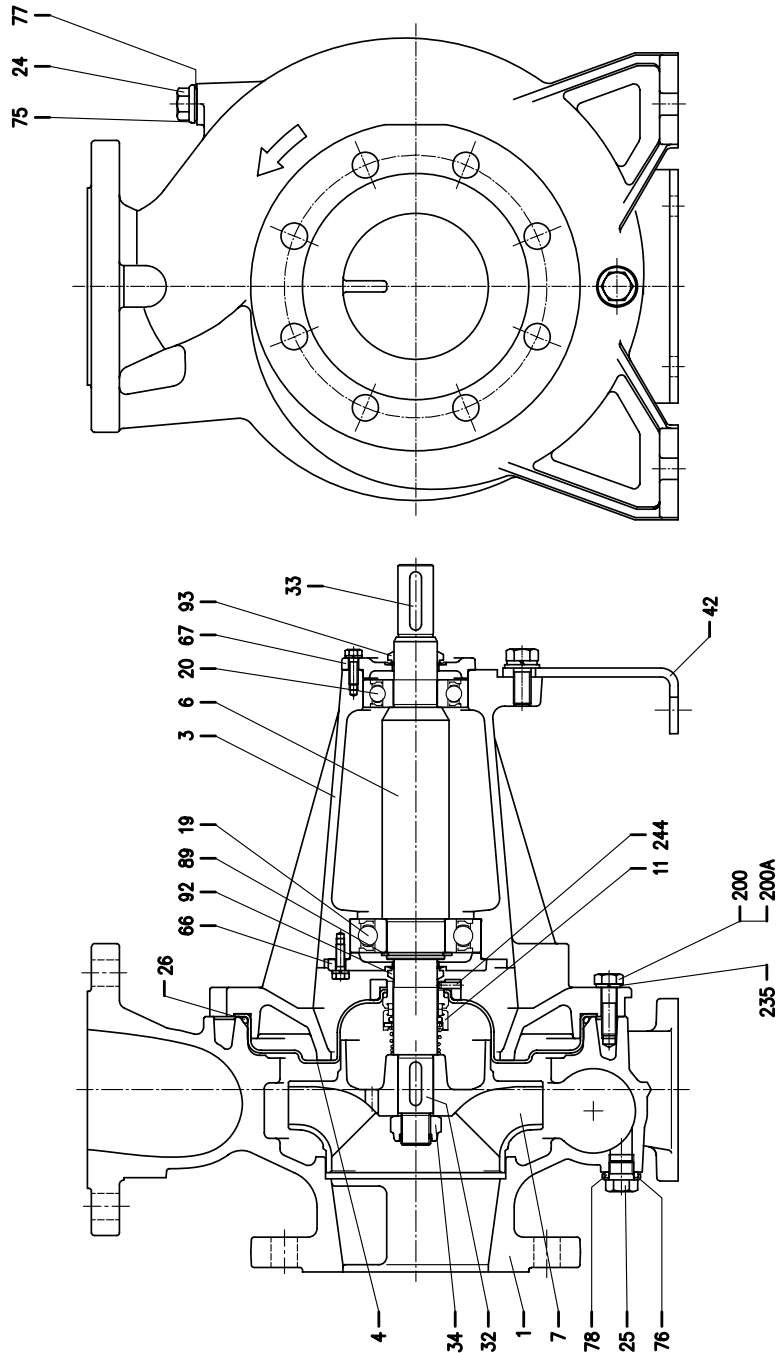

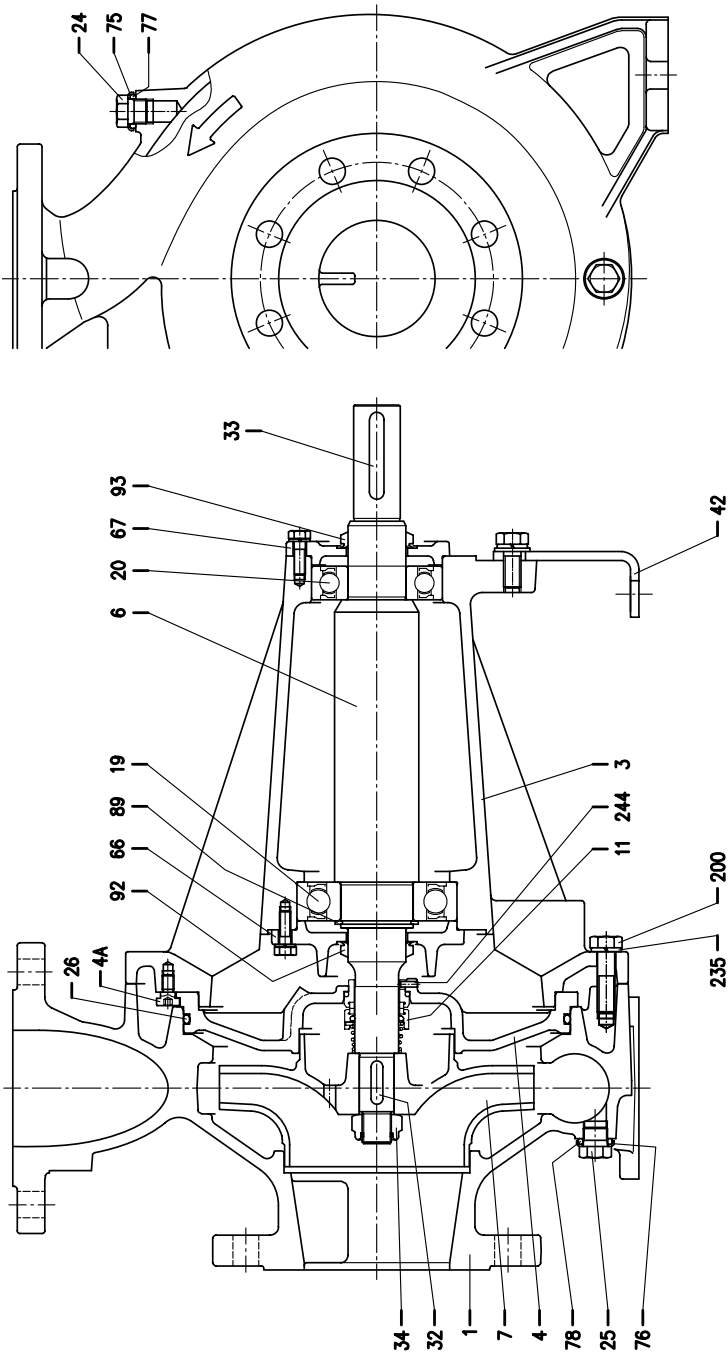

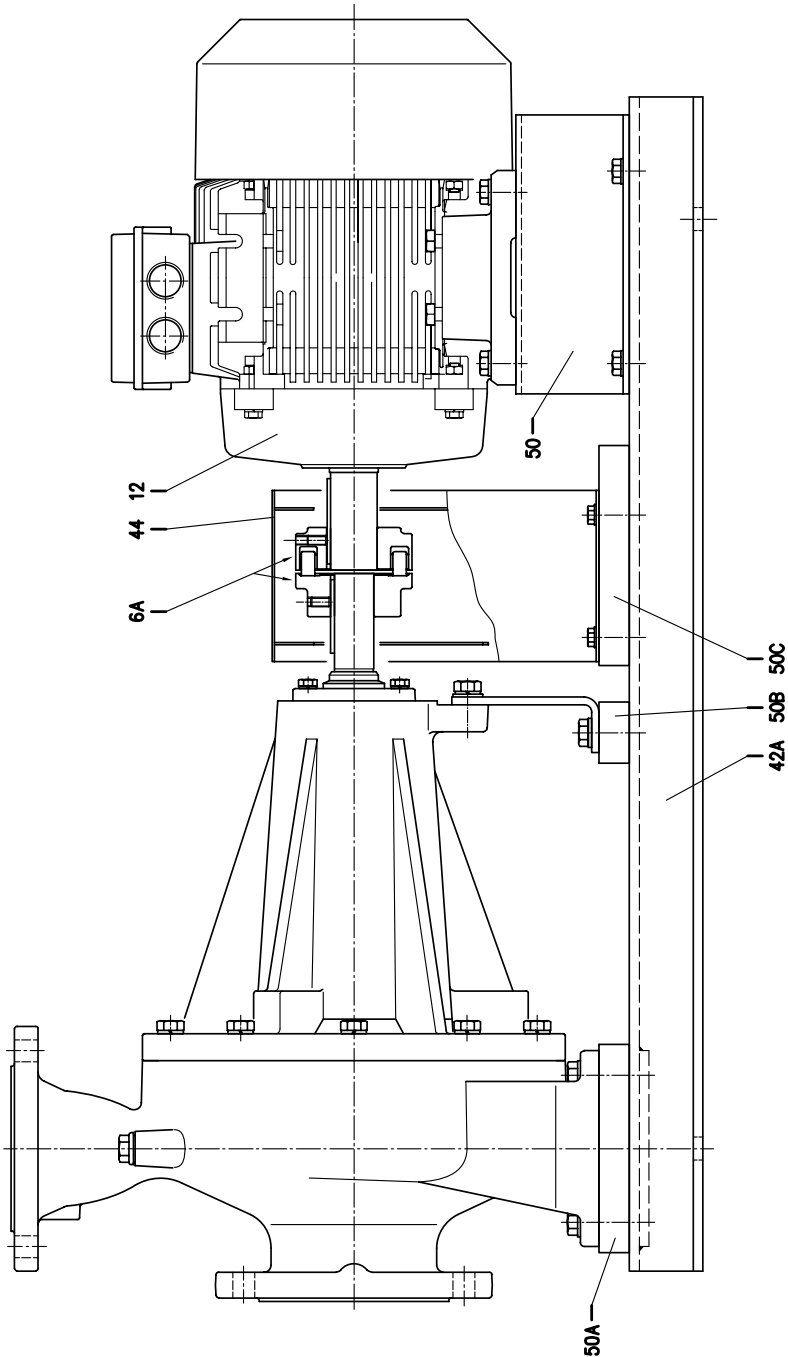

N°	PART NAME	MATERIAL	DIMENSIONS	STANDARD	N. FOR 1 UNIT
001	Casing	EN 1.4401 (AISI316)			1
003	Support	Cast iron EN-GJL-200-EN 1561			1
004	Casing cover	EN 1.4404 (AISI316L)			1
006	Shaft	EN 1.4404 (AISI316L)-Part in contact with liquid			1
006A	Flexible coupling	Cast iron EN-GJL-250-EN 1561	See table p. 327		1
007	Impeller	EN 1.4401 (AISI316)			1
011	Mechanical seal	SiC/SiC/FPM Ceramic/Carbon/FPM (H option) SiC/Carbon/EPDM (E ption)	See p. 321-325		1
012	Motor	-			1
019	Bearing	-	See table p. 320		1
020	Bearing	-	See table p. 320		1
024	Plug	EN 1.4404 (AISI316L)	G3/8	EPE DRAWING	1
025	Plug	EN 1.4404 (AISI316L)	G3/8	EPE DRAWING	1
026	"O" ring	FPM EPDM (E option)	227.96x5.34	OR 6895	1
032	Key	EN 1.4401 (AISI 316)	8x7x30	UNI 6604	1
033	Key	C 40	8x7x40		1
034	Impeller nut	EN 1.4404 (AISI 316L)	M20x1.5	UNI 7474	1
042	Pump support	Zincked steel		EPE DRAWING	1
042A	Base	Zincked steel		EPE DRAWING	1
044	Protection	Zincked steel		EPE DRAWING	1
050	Foot	Aluminium		EPE DRAWING	2
050A	Spacer for pump	/			/
050B	Spacer for pump	/			/
050C	spacer for protection	/			/
066	Impeller side bearing cover	Cast iron EN-GJL-200-EN 1561			1
067	Motor side bearing cover	Cast iron EN-GJL-200-EN 1561			1
075	Washer (plug)	EN 1.4404 (AISI 316L)			1
076	Washer (plug)				1
077	O-ring (plug)	FPM			1
078	O-ring (plug)	EPDM (E option)			1
089	Snap ring	Carbon tool steels TC 80	Ø 40	UNI 7435	1
092	"V" ring	-	VS-0030		1
093	"V" ring				1
200	Screw	Stainless steel A2 70 class ISO 3506/1	M 10x35	UNI 5739	10
200A	Screw		M 10x30		2
235	Washer	EN 1.4301(AISI 304)	10.5	UNI 8842	12
244	Pin [1]	EN 1.4301(AISI 304)	4x15	UNI 6873	1

Counterflange kit on request, see table p. 328-329

[1] Not for H and E option.

For drawing see p.314-316

N°	PART NAME	MATERIAL	DIMENSIONS	STANDARD	N. FOR 1 UNIT
001	Casing	EN 1.4401 (AISI316)			1
003	Support	Cast iron EN-GJL-200-EN 1561			1
004	Casing cover	EN 1.4401 (AISI316)			1
004A	Screw for casing cover	EN 1.4301 (AISI 304)			2
006	Shaft	EN 1.4462 (Duplex stainless steel)-Part in contact with liquid			1
006A	Flexible coupling	Cast iron EN-GJL-250-EN 1561	See table p. 327		1
007	Impeller	EN 1.4401 (AISI316)			1
011	Mechanical seal	SiC/SiC/FPM Ceramic/Carbon/FPM (H option) SiC/Carbon/EPDM (E option)	See p. 321-325		1
012	Motor	-			1
019	Bearing	-	See table p. 320		1
020	Bearing	-	See table p. 320		1
024	Plug	EN 1.4404 (AISI316L)	G3/8		1
025	Plug	EN 1.4404 (AISI316L)	G3/8		1
026	"O" ring	FPM EPDM (E version)	253.36x5.34	OR 6995	1
032	Key	EN 1.4401 (AISI 316)	8x7x30	UNI 6604	1
			8x7x40		1
			10x8x60		1
033	Key	C 40		UNI 6604	1
034	impeller nut	EN 1.4404 (AISI 316L)	M20x1.5	UNI 7474	1
			M24x2		1
					1
042	Pump support	Zincked steel			1
042A	Base	Zincked steel			1
044	Protection	Zincked steel			1
050	Foot (only for 65-250/22kW)	Aluminium			2
050A	Spacer	Aluminium			[1]
050B	Spacer	Aluminium			[2]
050C	Spacer for protection	Aluminium			[3]
066	Impeller side bearing cover	Cast iron EN-GJL-200-EN 1561			1
067	Motor side bearing cover	Cast iron EN-GJL-200-EN 1561			1
075	Washer (plug)	EN 1.4404 (AISI 316L)			1
076	Washer (plug)				1
077	O-ring (plug)				1
078	O-ring (plug)	FPM EPDM (E version)			1
089	Snap ring	Carbon tool steels TC 80	Ø 50	UNI 7435	1
092	"V" ring	-	VS-0040		1
093	"V" ring				1
200	Screw				1
235	Washer	Stainless steel A2 70 class ISO 3506/1	M 12x45	UNI 5739	10
244	Pin [3]	EN 1.4301 (AISI 304)	13	UNI 8842	10
		EN 1.4301 (AISI 304)	4x12	UNI 6873	1

Counterflange kit on request, see table p. 328-329

- [1] N° for 1 unit=0 for 65-250, 80-200/22 and 80-250/55
N° for 1 unit=2 for 80-200/30, 80-200/37 and 80-250/45
- [2] N° for 1 unit=0 for 65-250, 80-200/22 and 80-250/55
N° for 1 unit=2 for 80-200/30, 80-200/37 and 80-250/45
- [3] Not for H and E option.

For drawing see p.308-309

CONSTRUCTIONS**50 Hz**

Rev. H

BALL BEARING

Type pumps		Ball bearing		
Single Phase 50 Hz	Three Phase 50 Hz	Pump side	Fan side	
3(.)M 32-125/1.1 M	3(.)M 32-125/1.1	6205-SRSH C3	6205-SRSH C3	
3(.)M 32-160/1.5 M	3(.)M 32-160/1.5			
3(.)M 32-160/2.2 M	3(.)M 32-160/2.2			
-	3(.)M 32-200/3			
	3(.)M 32-200/4	6206-2RS1 C3		
	3(.)M 32-200/5.5	6306-2RS1 C3	6206-2RS1 C3	
	3(.)M 32-200/7.5			
3(.)M 40-125/1.5 M	3(.)M 40-125/1.5	6205-SRSH C3	6205-SRSH C3	
3(.)M 40-125/2.2 M	3(.)M 40-125/2.2			
-	3(.)M 40-160/3			
	3(.)M 40-160/4			6206-2RS1 C3
	3(.)M 40-200/5.5	6306 2RS1 C3	6206-2RS1 C3	
	3(.)M 40-200/7.5	6308-2RS1 C3	6208-2RS1 C3	
	3(.)M 40-200/11			
3(.)M 50-125/2.2 M	3(.)M 50-125/2.2	6205-SRSH C3	6205-SRSH C3	
-	3(.)M 50-125/3	6206-2RS1 C3		
	3(.)M 50-125/4	6306-2RS1 C3		6206-2RS1 C3
	3(.)M 50-160/5.5	6308-2RS1 C3		6208-2RS1 C3
	3(.)M 50-160/7.5			
	3(.)M 50-200/9.2	6309-2RS1 C3	6309-2RS1 C3	
	3(.)M 50-200/11			
	3(.)M 50-200/15	6206-2RS1 C3	6205-SRSH C3	
	3(.)M 65-125/4	6306-2RS1 C3	6206-2RS1 C3	
	3(.)M 65-125/5.5			
	3(.)M 65-125/7.5			
	3(.)M 65-160/7.5			
	3(.)M 65-160/9.2	6308-2RS1 C3	6208-2RS1 C3	
	3(.)M 65-160/11			
	3(.)M 65-160/15	6309-2RS1 C3	6309-2RS1 C3	
	3(.)M 65-200/15			
	3(.)M 65-200/18.5			
	3(.)M 65-200/22			
	3LM 80-160/11	6308-2RS1 C3	6208-2RS1 C3	
	3LM 80-160/13	6309-2RS1 C3	6309-2RS1 C3	
	3LM 80-160/15			
3LM 80-160/18.5				

Type pumps Three Phase 50 Hz	Ball bearing	
	Pump side	Fan side
3(.)S 32-125/1.1	6204-2Z C3	6204-2Z C3
3(.)S 32-160/1.5	6205-2Z C3	6205-2Z C3
3(.)S 32-160/2.2		
3(.)S 32-200/3	6206-2Z C3	6206-2Z C3
3(.)S 32-200/4	6306-2Z C3	6306-2Z C3
3(.)S 32-200/5.5	6208-2Z C3	6208-2Z C3
3(.)S 32-200/7.5		
3(.)S 40-125/1.5	6205-2Z C3	6205-2Z C3
3(.)S 40-125/2.2		
3(.)S 40-160/3	6206-2Z C3	6206-2Z C3
3(.)S 40-160/4	6306-2Z C3	6306-2Z C3
3(.)S 40-200/5.5	6208-2Z C3	6208-2Z C3
3(.)S 40-200/7.5		
3(.)S 40-200/11	6209-2Z C3	6209-2Z C3
3(.)S 50-125/2.2	6205-2Z C3	6205-2Z C3
3(.)S 50-125/3	6206-2Z C3	6206-2Z C3
3(.)S 50-125/4	6306-2Z C3	6306-2Z C3
3(.)S 50-160/5.5	6208-2Z C3	6208-2Z C3
3(.)S 50-160/7.5		
3(.)S 50-200/9.2	6209-2Z C3	6209-2Z C3
3(.)S 50-200/11		
3(.)S 50-200/15	6306-2Z C3	6306-2Z C3
3(.)S 65-125/4		
3(.)S 65-125/5.5		
3(.)S 65-125/7.5		
3(.)S 65-160/7.5	6208-2Z C3	6208-2Z C3
3(.)S 65-160/9.2		
3(.)S 65-160/11	6209-2Z C3	6209-2Z C3
3(.)S 65-160/15		
3(.)S 65-200/15		
3(.)S 65-200/18.5		
3(.)S 65-200/22	6310-2Z C3	6310-2Z C3
3LS 65-250/30	6312-2Z	6312-2Z
3LS 65-250/37		
3LS 80-160/11	6209-2Z C3	6209-2Z C3
3LS 80-160/15R		
3LS 80-160/15		
3LS 80-160/18.5		
3LS 80-200/22	6310-2Z C3	6310-2Z C3
3LS 80-200/30	6312-2Z	6312-2Z
3LS 80-200/37		
3LS 80-250/37		
3LS 80-250/45	6313 2Z	6313 2Z
3LS 80-250/55	6314	6314

1)

1) Motor available with lubricator for regular re-greasing of bearing.


BALL BEARING

Type pumps Three Phase 50 Hz	Ball bearing			
	Pump		Motor	
	Pump side	Motor side	Pump side	Fan side
3(.)P 32-125/1.1	6306-2RS1 C3	6206-2RS1 C3	6204-2Z C3	6204-2Z C3
3(.)P 32-160/1.5			6205-2Z C3	6205-2Z C3
3(.)P 32-160/2.2				
3(.)P 32-200/3	6308-2RS1 C3	6306-2RS1 C3	6206-2Z C3	6206-2Z C3
3(.)P 32-200/4			6306-2Z C3	6306-2Z C3
3(.)P 32-200/5.5			6208-2Z C3	6208-2Z C3
3(.)P 32-200/7.5				
3(.)P 40-125/1.5	6306-2RS1 C3	6206-2RS1 C3	6205-2Z C3	6205-2Z C3
3(.)P 40-125/2.2			6206-2Z C3	6206-2Z C3
3(.)P 40-160/3			6306-2Z C3	6306-2Z C3
3(.)P 40-160/4	6308-2RS1 C3	6306-2RS1 C3	6208-2Z C3	6208-2Z C3
3(.)P 40-200/5.5			6209-2Z C3	6209-2Z C3
3(.)P 40-200/7.5			6205-2Z C3	6205-2Z C3
3(.)P 40-200/11			6206-2Z C3	6206-2Z C3
3(.)P 50-125/2.2	6306-2RS1 C3	6206-2RS1 C3	6306-2Z C3	6306-2Z C3
3(.)P 50-125/3				
3(.)P 50-125/4				
3(.)P 50-160/5.5	6308-2RS1 C3	6306-2RS1 C3	6208-2Z C3	6208-2Z C3
3(.)P 50-160/7.5				
3(.)P 50-200/9.2			6209-2Z C3	6209-2Z C3
3(.)P 50-200/11				
3(.)P 50-200/15	6306-2RS1 C3	6206-2RS1 C3	6306-2Z C3	6306-2Z C3
3(.)P 65-125/4			6208-2Z C3	6208-2Z C3
3(.)P 65-125/5.5				
3(.)P 65-125/7.5				
3(.)P 65-160/7.5				
3(.)P 65-160/9.2				
3(.)P 65-160/11			6209-2Z C3	6209-2Z C3
3(.)P 65-160/15				
3(.)P 65-200/15	6310-2RS1 C3	6308-2RS1 C3	6310-2Z C3	6310-2Z C3
3(.)P 65-200/18.5				
3(.)P 65-200/22				
3LP 65-250/30				
3LP 65-250/37	6308-2RS1 C3	6306-2RS1 C3	6209-2Z C3	6209-2Z C3
3LP 80-160/11				
3LP 80-160/15R				
3LP 80-160/15				
3LP 80-160/18.5				
3LP 80-200/22	6310-2RS1 C3	6308-2RS1 C3	6312-2Z	6312-2Z
3LP 80-200/30				
3LP 80-200/37				
3LP 80-250/37				
3LP 80-250/45				
3LP 80-250/55				

1)


1) Motor available with lubricator for regular re-greasing of bearing.

MECHANICAL SEAL STANDARD AND H VERSION

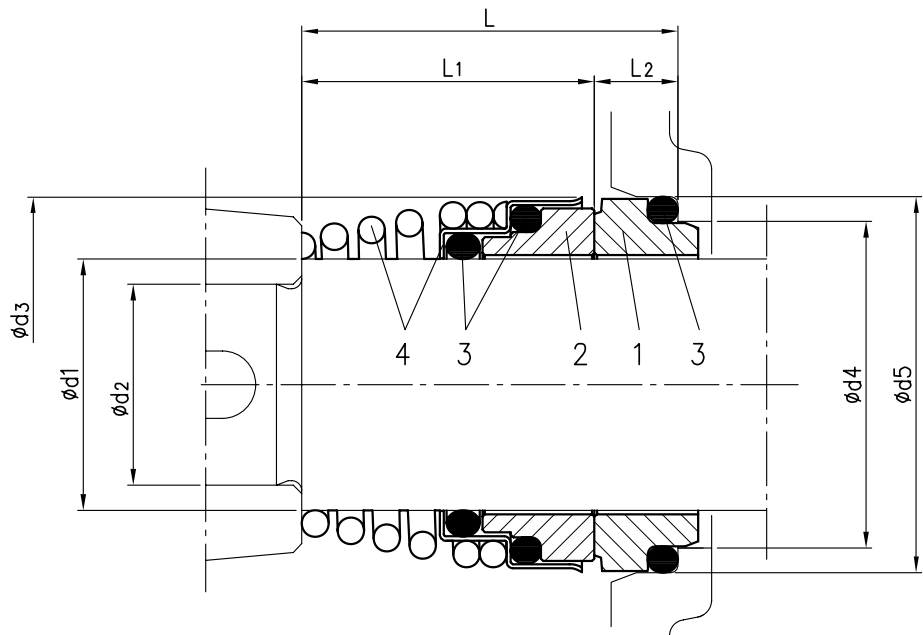


Version	Manufacturer Reference			Pump type	Dimensions								Material			
	Manuf.	Description	Material Description		d1	d2	d3	d4	d5	L	L1	L2	1 Stationary seal ring	2 Rotary seal ring	3 rubber	4 Frame + spring
Standard	Roten	UNITEN 3K	X6X62V6	32-125/160/200 40-125/160/200 50-125/160/200 65-125 65-160/7.5 65-160/9.2 65-160/11	22	19	38	31	37	37.5	27.5	10	Carbon	Ceramic	NBR	EN 1.4401 (AISI 316)
				65-160/15 65-200	30	24	46	39	45	42.5	32.5	10				
H	Roten	UNITEN 3K	XYXY2VY	32-125/160/200 40-125/160/200 50-125/160/200 65-125 65-160/7.5 65-160/9.2 65-160/11	22	19	38	31	37	37.5	27.5	10	Carbon	Ceramic	FPM	EN 1.4401 (AISI 316)
				65-160/15 65-200 65-250 80-160/200 80-250	30 35	24 29	46 50	39 44	45 50	42.5 42.5	32.5 32.5	10 10				

MECHANICAL SEAL L VERSION Ø22

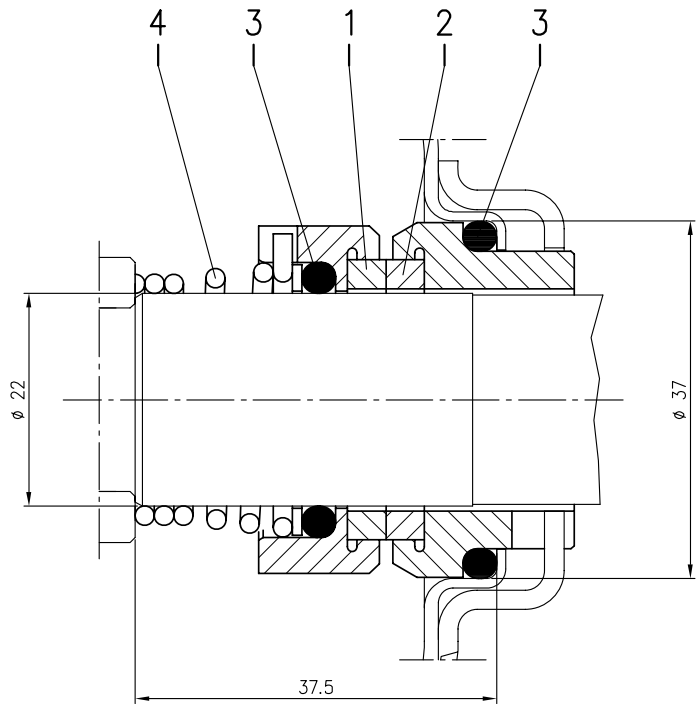


Manufacturer Reference			Pump type	Material			
Manuf.	Description	Material Description		1 Stationary seal ring	2 Rotary seal ring	3 rubber	4 Frame + spring
Burgmann	M377GN85/22-00-R	Q1Q1VGG	32-125/160/200 40-125/160/200 50-125/160/200 65-125 65-160/7.5 65-160/9.2 65-160/11	SiC	SiC	FPM	EN 1.4571 (AISI 316Ti)

MECHANICAL SEAL L VERSION

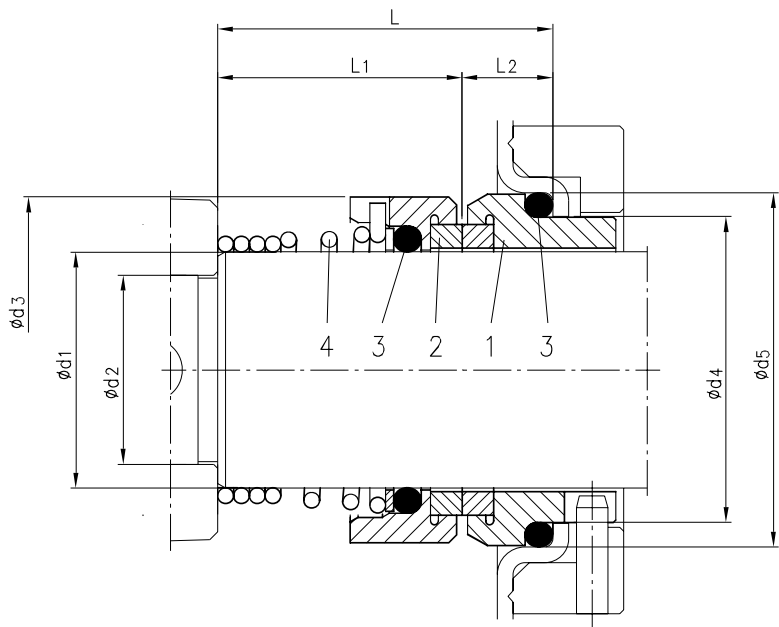


Manufacturer Reference			Pump type	Dimensions								Material			
Manuf.	Description	Material Description		d1	d2	d3	d4	d5	L	L1	L2	1 Stationary seal ring	2 Rotary seal ring	3 rubber	4 Frame + spring
Burgmann	M377GN85-R	Q1Q1VGG	65-160/15	30	24	44	39	45	42.5	31	11.5	SiC	SiC	FPM	EN 1.4571 (AISI 316Ti)
			65-200												
			65-250												
			80-160/200												
			80-250	35	29	49	44	50	42.5	31	11.5				

MECHANICAL SEAL HS VERSION Ø22

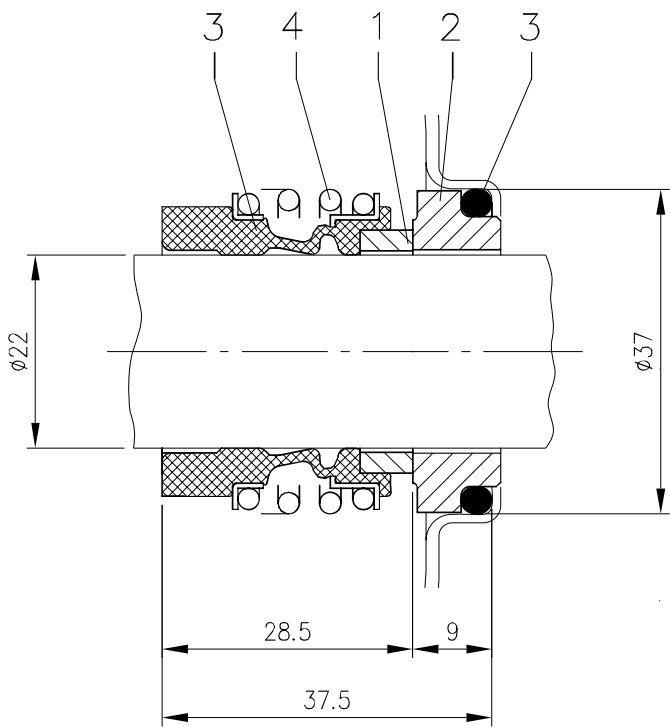


Manufacturer Reference			Pump type	Material			
Manuf.	Description	Material Description		1 Stationary seal ring	2 Rotary seal ring	3 rubber	4 Frame + spring
Burgmann	MG1S6/22-G3	Q1Q1VGG	32-125/160/200	SiC	SiC	FPM	EN 1.4571 (AISI 316Ti)
			40-125/160/200				
			50-125/160/200				
			65-125				
			65-160/7.5				
			65-160/9.2				
			65-160/11				


MECHANICAL SEAL HS AND E VERSION

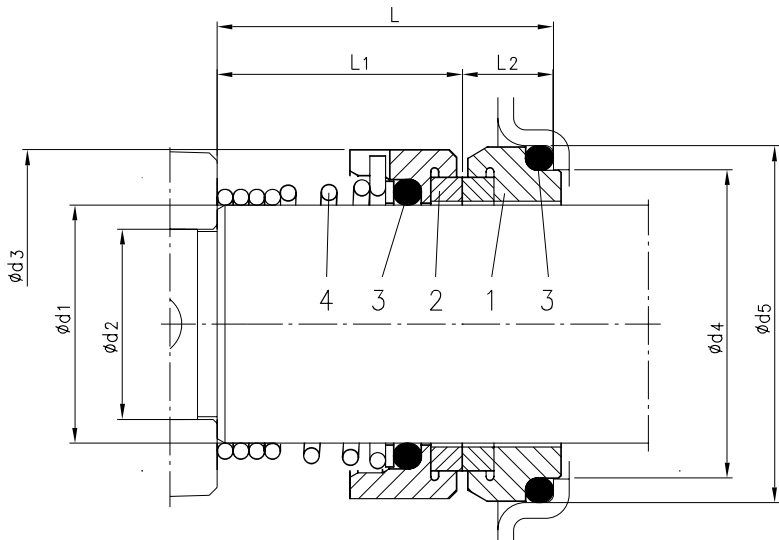


Version	Manufacturer Reference			Pump type	Dimensions								Material			
	Manuf.	Description	Material Description		d1	d2	d3	d4	d5	L	L1	L2	1 Stationary seal ring	2 Rotary seal ring	3 rubber	4 Frame + spring
HS	Burgmann	M377GNX/30-00-R	Q1Q1VGG	65-160/15	30	24	44	39	45	42.5	31	11.5	SiC	SiC	FPM	EN 1.4571 (AISI 316Ti)
				65-200												
				80-160/200	30	24	44	39	45	42.5	31	11.5	Carbon	SiC	EPDM	EN 1.4571 (AISI 316Ti)
				80-250	35	29	49	44	50	42.5	31	11.5				
E		M377GNX/35-00-R	Q1BEGG													

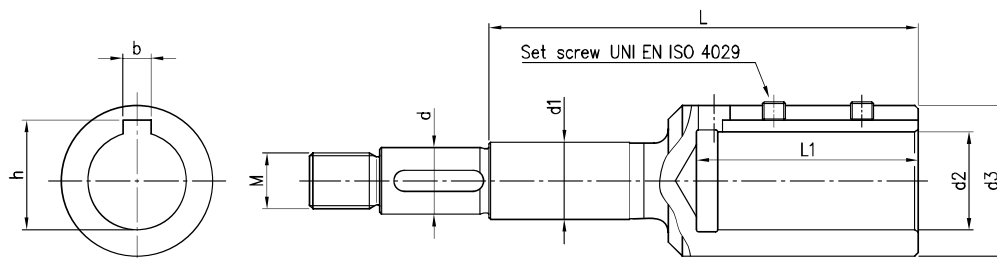COUPLING


Type pumps	kW	HP	Motor Size	Dimensions mm										Set screw
				d	d1	d2	d3	M	L	L1	b	h		
32-125/1.1	1.1	1.5	80	19	22	19	33	M16x1.5	98	43	6	21.8	M6x6	
32-160/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8	
32-160/2.2	2.2	3	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8	
32-200/3.0	3	4	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
32-200/4.0	4	5.5	112	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
32-200/5.5	5.5	7.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
32-200/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
40-125/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8	
40-125/2.2	2.2	3	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8	
40-160/3.0	3	4	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
40-160/4.0	4	5.5	112	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
40-200/5.5	5.5	7.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
40-200/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
40-200/11	11	15	160	19	22	42	63	M16x1.5	178	114	12	45.3	M8x8	
50-125/2.2	2.2	3	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8	
50-125/3.0	3	4	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
50-125/4.0	4	5.5	112	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
50-160/5.5	5.5	7.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
50-160/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
50-200/9.2	9.2	12.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
50-200/11	11	15	160	19	22	42	63	M16x1.5	178	114	12	45.3	M8x8	
50-200/15	15	20	160	22	22	42	63	M18x1.5	209	114	12	45.3	M8x8	
65-125/4.0	4	5.5	112	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8	
65-125/5.5	5.5	7.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
65-125/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
65-160/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
65-160/9.2	9.2	12.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8	
65-160/11	11	15	160	19	22	42	63	M16x1.5	178	114	12	45.3	M8x8	
65-160/15	15	20	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
65-200/15	15	20	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
65-200/18.5	18.5	25	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
65-200/22	22	30	180	24	30	48	72	M20x1.5	184	114	14	51.8	M10x10	
65-250/30	30	40	200	24	30	55	85	M20x1.5	184	114	16	59.3	M12x12	
65-250/37	37	50	200	24	30	55	85	M20x1.5	184	114	16	59.3	M12x12	
80-160/11	11	15	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
80-160/15R	15	20	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
80-160/15	15	20	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
80-160/18.5	18.5	25	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8	
80-200/22	22	30	180	24	30	48	72	M20x1.5	184	114	14	51.8	M10x10	
80-200/30	30	40	200	24	30	55	85	M20x1.5	184	114	16	59.3	M12x12	
80-200/37	37	50	200	24	30	55	85	M20x1.5	184	114	16	59.3	M12x12	
80-250/37	37	50	200	29	35	55	85	M24x2	206	114	16	59.3	M12x12	
80-250/45	45	60	225	29	35	55	85	M24x2	206	114	16	59.3	M12x12	
80-250/55	55	75	250	29	35	60	89	M24x2	218	144	18	64.4	M12x12	

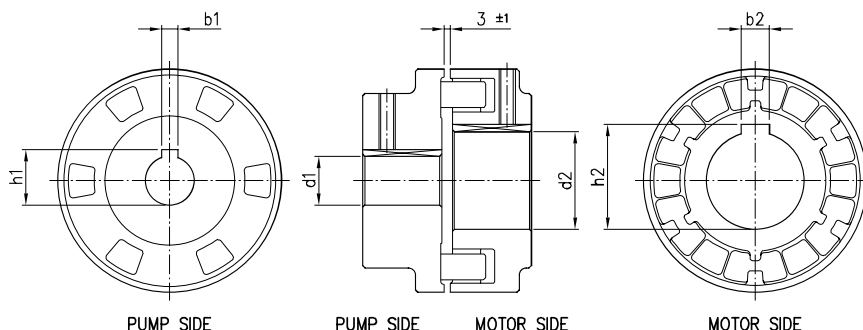FLEXIBLE COUPLING

Type pumps	kW	HP	Motor Size	Dimensions mm					
				d1	b1	h1	d2	b2	h2
32-125/1.1	1.1	1.5	80	24	8	27.3	19	6	21.8
32-160/1.5	1.5	2	90	24	8	27.3	24	8	27.3
32-160/2.2	2.2	3	90	24	8	27.3	24	8	27.3
32-200/3.0	3	4	100	24	8	27.3	28	8	31.3
32-200/4.0	4	5.5	112	24	8	27.3	28	8	31.3
32-200/5.5	5.5	7.5	132	24	8	27.3	38	10	41.3
32-200/7.5	7.5	10	132	24	8	27.3	38	10	41.3
40-125/1.5	1.5	2	90	24	8	27.3	24	8	27.3
40-125/2.2	2.2	3	90	24	8	27.3	24	8	27.3
40-160/3.0	3	4	100	24	8	27.3	28	8	31.3
40-160/4.0	4	5.5	112	24	8	27.3	28	8	31.3
40-200/5.5	5.5	7.5	132	24	8	27.3	38	10	41.3
40-200/7.5	7.5	10	132	24	8	27.3	38	10	41.3
40-200/11	11	15	160	24	8	27.3	42	12	45.3
50-125/2.2	2.2	3	90	24	8	27.3	24	8	27.3
50-125/3.0	3	4	100	24	8	27.3	28	8	31.3
50-125/4.0	4	5.5	112	24	8	27.3	28	8	31.3
50-160/5.5	5.5	7.5	132	24	8	27.3	38	10	41.3
50-160/7.5	7.5	10	132	24	8	27.3	38	10	41.3
50-200/9.2	9.2	12.5	132	24	8	27.3	38	10	41.3
50-200/11	11	15	160	24	8	27.3	42	12	45.3
50-200/15	15	20	160	24	8	27.3	42	12	45.3
65-125/4.0	4	5.5	112	24	8	27.3	28	8	31.3
65-125/5.5	5.5	7.5	132	24	8	27.3	38	10	41.3
65-125/7.5	7.5	10	132	24	8	27.3	38	10	41.3
65-160/7.5	7.5	10	132	24	8	27.3	38	10	41.3
65-160/9.2	9.2	12.5	132	24	8	27.3	38	10	41.3
65-160/11	11	15	160	24	8	27.3	42	12	45.3
65-160/15	15	20	160	24	8	27.3	42	12	45.3
65-200/15	15	20	160	24	8	27.3	42	12	45.3
65-200/18.5	18.5	25	160	24	8	27.3	42	12	45.3
65-200/22	22	30	180	24	8	27.3	48	14	51.8
65-250/30	30	40	200	32	10	35.3	55	16	59.3
65-250/37	37	50	200	32	10	35.3	55	16	59.3
80-160/11	11	15	160	24	8	27.3	42	12	45.3
80-160/15R	15	20	160	24	8	27.3	42	12	45.3
80-160/15	15	20	160	24	8	27.3	42	12	45.3
80-160/18.5	18.5	25	160	24	8	27.3	42	12	45.3
80-200/22	22	30	180	32	10	35.3	48	14	51.8
80-200/30	30	40	200	32	10	35.3	55	16	59.3
80-200/37	37	50	200	32	10	35.3	55	16	59.3
80-250/37	37	50	200	32	10	35.3	55	16	59.3
80-250/45	45	60	225	32	10	35.3	55	16	59.3
80-250/55	55	75	250	32	10	35.3	60	18	64.4

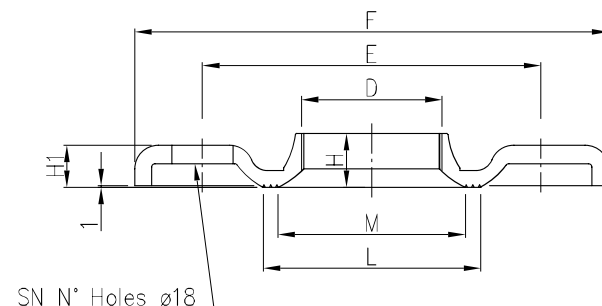
COUNTERFLANGE ZINCKED STEEL

Counterflange									Screw	
DN	D	E	F	H	H1	L	M	SN	DIMENSIONS	MATERIAL
32	G 1 1/4	100	100	15	11.5	67	50	4	M16x55	Zn. Steel 8.8 strenght class ISO 898-1
40	G 1 1/2	110	110	17.5	11.5	72	58	4		
50	G2	125	125	19	15	89	70	4		
65	G 2 1/2	145	185	23	14	104	88	4		
80	G3	160	200	24	16	117.5	100	8	M16x60	
100	G4	180	220	29	16	144	125	8		

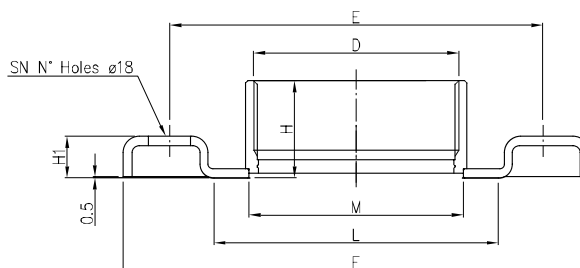COUNTERFLANGE EN 1.4404 (AISI 316L)


Counterflange									Screw	
DN	D	E	F	H	H1	L	M	SN	DIMENSIONS	MATERIAL
32	G 1 1/4	100	140	29.5	14	66	44	4	M16x55	A2-70 class ISO 3506-1
40	G 1 1/2	110	150	29.5	14	71	50.5			
50	G 2	125	165	34	16	83	63			
65	G 2 1/2	145	185	40	16	103	80			
80	G3	160	200	42	18	122	92	8	M16x60	

COUNTERFLANGE EN 1.4404 (AISI 316L) DN100

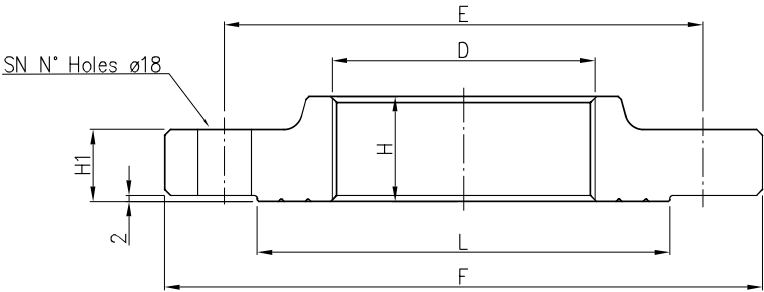

Counterflange								Screw	
DN	D	E	F	H	H1	L	SN	DIMENSIONS	MATERIAL
100	G4	180	220	35	20	150	8	M16x70	A2-70 class ISO 3506-1

GASKET

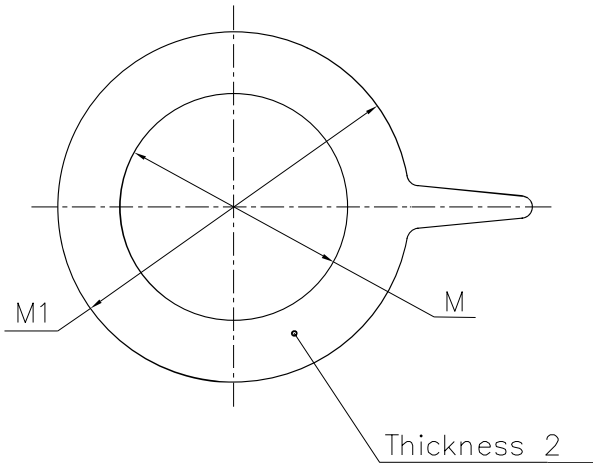


DN	M	M1
32	38	82
40	50	93
50	60	107
65	80	125
80	90	140
100	115	160

Material : EPDM for standard version
FPM for L version

DIMENSIONS 3(.)M 32, 40, 50, 65

50 Hz

Rev. H

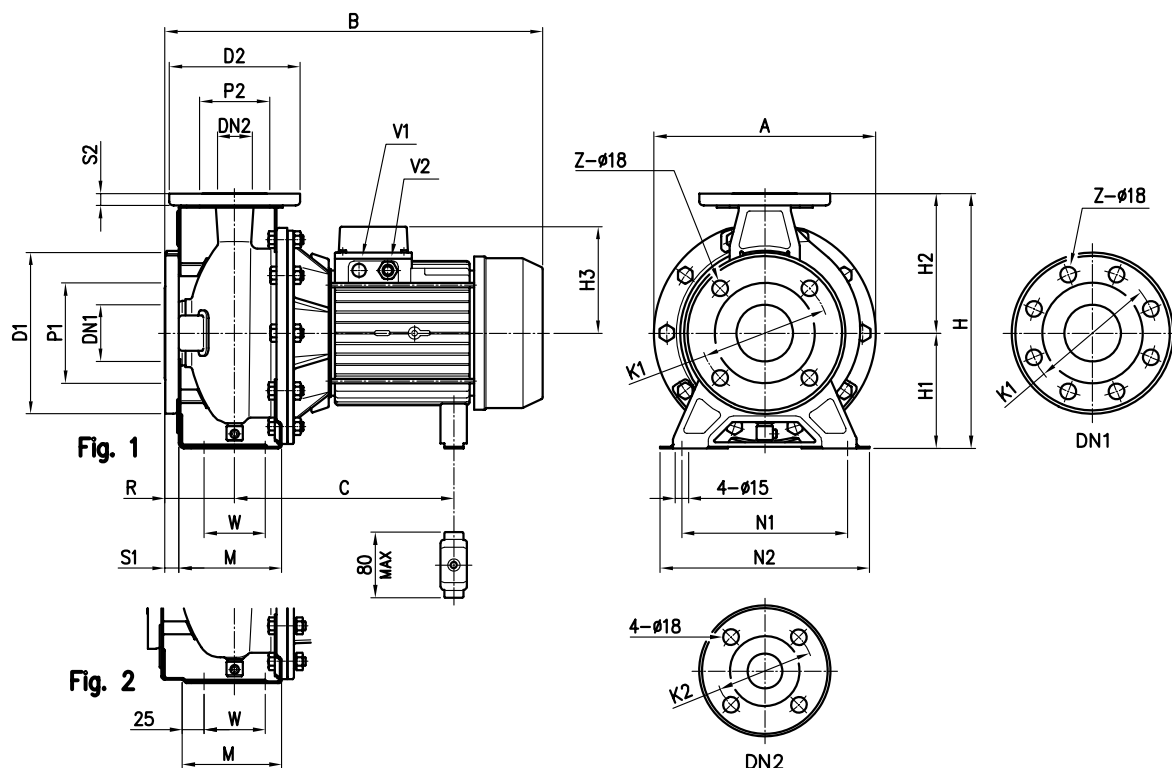


Model	Dimensions (mm)																												V1	V2		Weight [kg]
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	[1]	[2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	[3]	[4]	R	W	M	N1	N2	A	B	C	[3]	[3]		[4]		
32-125/1.1 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	252	112	140	124	141	80	70	114	140	190	213	408	219-230	-	PG 13.5	M20x1.5	29.6		
32-160/1.5 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	124	141	80	70	118	190	240	254	408	219-230	-	PG 13.5	M20x1.5	22.5		
32-160/2.0 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	124	141	80	70	118	190	240	254	408	219-230	-	PG 13.5	M20x1.5	24.6		
32-200/3.0 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	124	-	80	70	119	190	240	296	433	244-255	-	PG 13.5	-	32.8		
32-200/4.0 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	141	-	80	70	119	190	240	296	454	253	-	PG 16	-	39.5		
32-200/5.5 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	150	-	80	70	119	190	240	296	475	275	PG 13.5	PG 16	-	48.5		
32-200/7.5 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	150	-	80	70	119	190	240	296	517	275	PG 13.5	PG 16	-	57		
40-125/1.5 (M)	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	124	141	80	70	114	160	210	213	408	219-230	-	PG 13.5	M20x1.5	20.7		
40-125/2.2 (M)	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	124	141	80	70	114	160	210	213	408	219-230	-	PG 13.5	M20x1.5	22.1		
40-160/3.0 (M)	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	124	-	80	70	118	190	240	254	433	244-255	-	PG 13.5	-	28		
40-160/4.0 (M)	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	141	-	80	70	118	190	240	254	454	253	-	PG 16	-	35.1		
40-200/5.5 (M)	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	150	-	100	70	115	212	265	296	495	275	PG 13.5	PG 16	-	48.8		
40-200/7.5 (M)	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	150	-	100	70	115	212	265	296	537	275	PG 13.5	PG 16	-	56.2		
40-200/11 (M)	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	178	-	100	70	115	212	265	296	594	359	PG 13.5	PG 21	-	67.5		
50-125/2.2 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	124	141	100	70	114	190	240	254	428	219-230	-	PG 13.5	M20x1.5	28.1		
50-125/3.0 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	124	-	100	70	114	190	240	254	453	244-255	-	PG 13.5	-	28.6		
50-125/4.0 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	141	-	100	70	114	190	240	254	474	253	-	PG 16	-	35.2		
50-160/5.5 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	150	-	100	70	115	212	265	296	495	275	PG 13.5	PG 16	-	49.1		
50-160/7.5 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	150	-	100	70	115	212	265	296	537	275	PG 13.5	PG 16	-	55.5		
50-200/9.2 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	178	-	100	70	115	212	265	296	594	359	PG 13.5	PG 21	-	61.7		
50-200/11 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	178	-	100	70	115	212	265	296	594	359	PG 13.5	PG 21	-	67.5		
65-125/4 (M)	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	141	-	100	95	140	212	280	254	474	253	-	PG 16	-	40		
65-125/5.5 (M)	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	150	-	100	95	140	212	280	254	495	275	PG 13.5	PG 16	-	52		
65-125/7.5 (M)	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	150	-	100	95	140	212	280	254	537	275	PG 13.5	PG 16	-	58.5		
65-160/7.5 (M)	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	150	-	100	95	140	212	280	296	537	275	PG 13.5	PG 16	-	62		
65-160/9.2 (M)	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	178	-	100	95	140	212	280	296	594	359	PG 13.5	PG 21	-	67		
65-160/11 (M)	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	178	-	100	95	140	212	280	296	594	359	PG 13.5	PG 21	-	75.6		

[1] Standard [2] On request [3] Only for three phase [4] Only for single phase

DIMENSIONS 3(.)M 50, 65

50 Hz

Rev. H

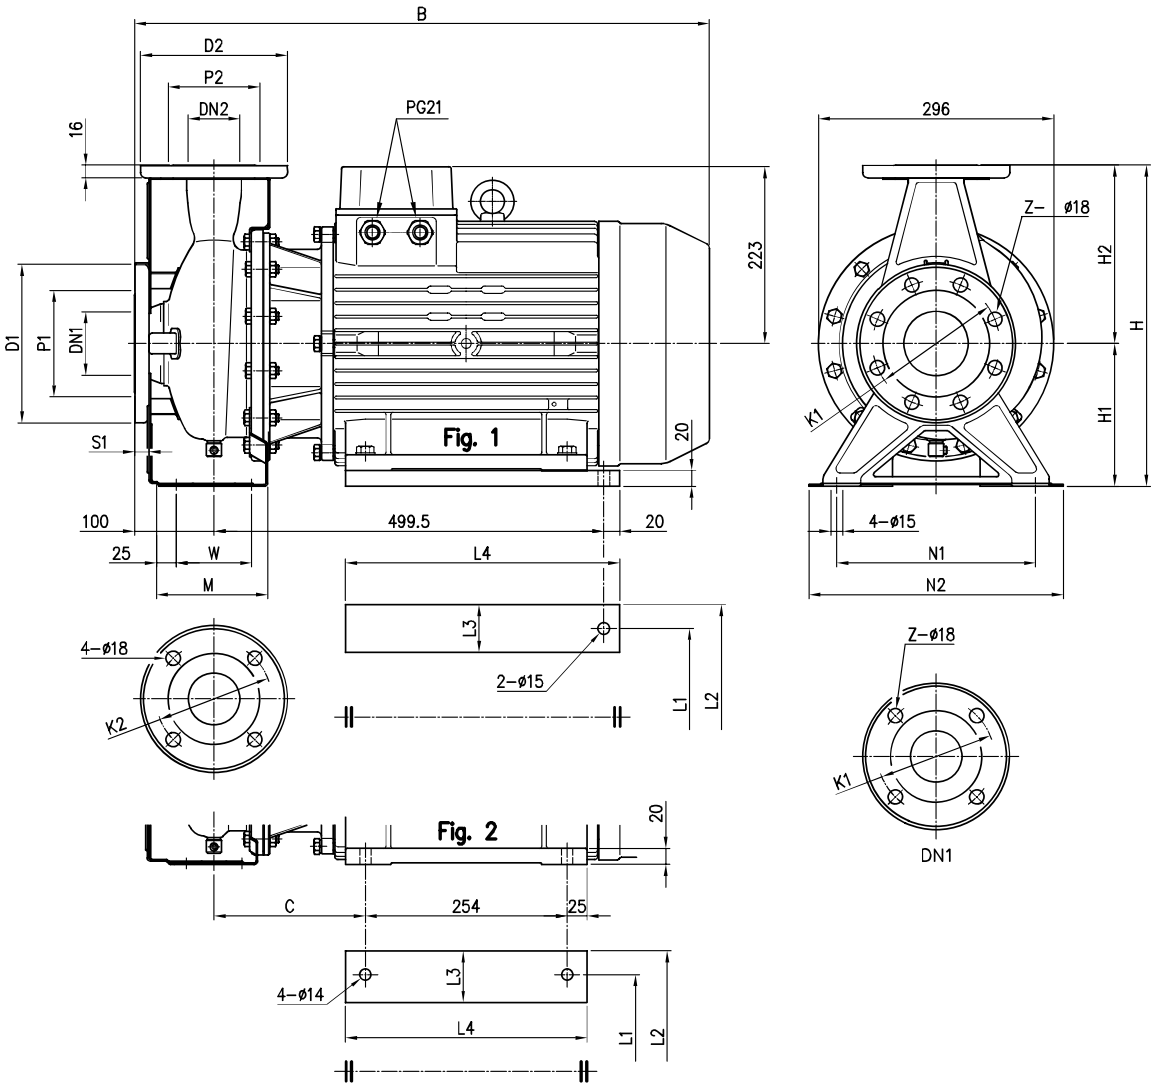

Model	Dimensions [mm]																								Weight [kgf]	
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	Z [1]	Z [2]	Ø DN2	Ø P2	Ø K2	Ø D2	Fig.	H	H1	H2	W	M	N1	N2	B	C	L1	L2	L3		L4
50-200/15	65	115	145	185	16	4	-	50	95	125	165	2	360	160	200	70	115	212	265	723	190.5	254	318	65	304	96
65-160/15	80	134	160	200	18	8	4	65	115	145	185	2	360	160	200	95	140	212	280	732	199.5	254	318	65	304	93
65-200/15	80	134	160	200	18	8	4	65	115	145	185	1	405	180	225	95	140	250	320	732	-	254	314	60	345	114
65-200/18.5	80	134	160	200	18	8	4	65	115	145	185	1	405	180	225	95	140	250	320	732	-	254	314	60	345	127
65-200/22	80	134	160	200	18	8	4	65	115	145	185	1	405	180	225	95	140	250	320	732	-	254	314	60	345	136


[1] Standard

[2] On request

DIMENSIONS 3LM 80-160

50 Hz

Rev. H

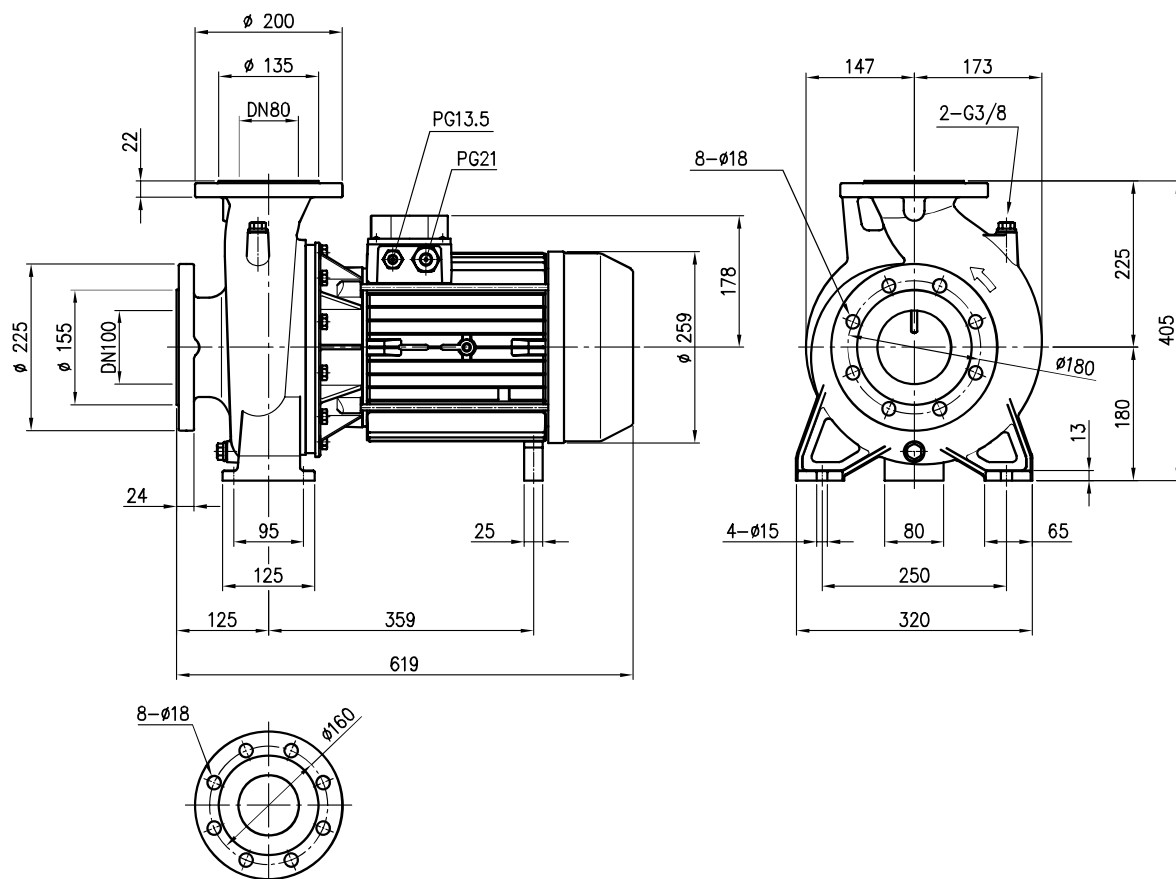80-160/11 – 80-160/13

Pumps weight


80-160/11 : 94 kgf

80-160/13 : 97 kgf

DIMENSIONS 3LM 80-160

50 Hz

Rev. H

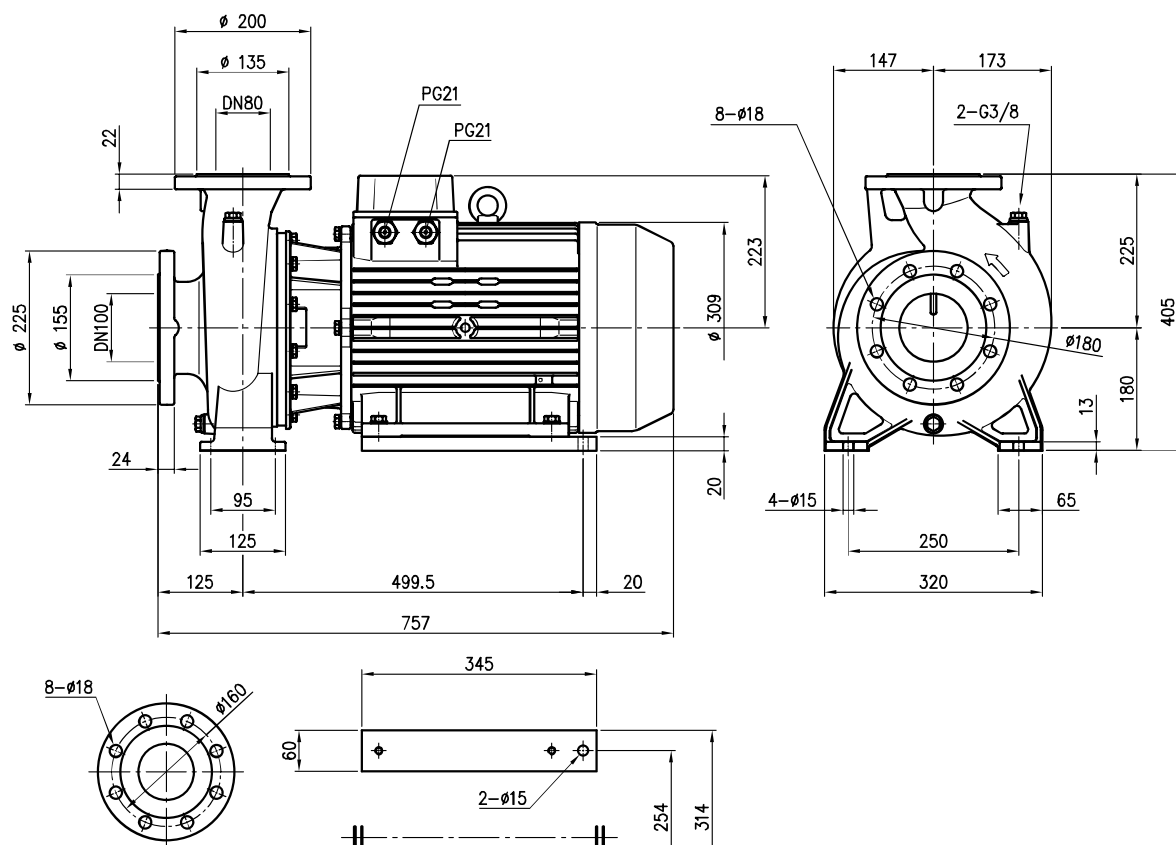80-160/15 – 80-160/18.5

Pumps weight


80-160/15 : 130 kgf

80-160/18.5 : 143 kgf

DIMENSIONS 3(.)S 32, 40, 50

50 Hz

Rev. H

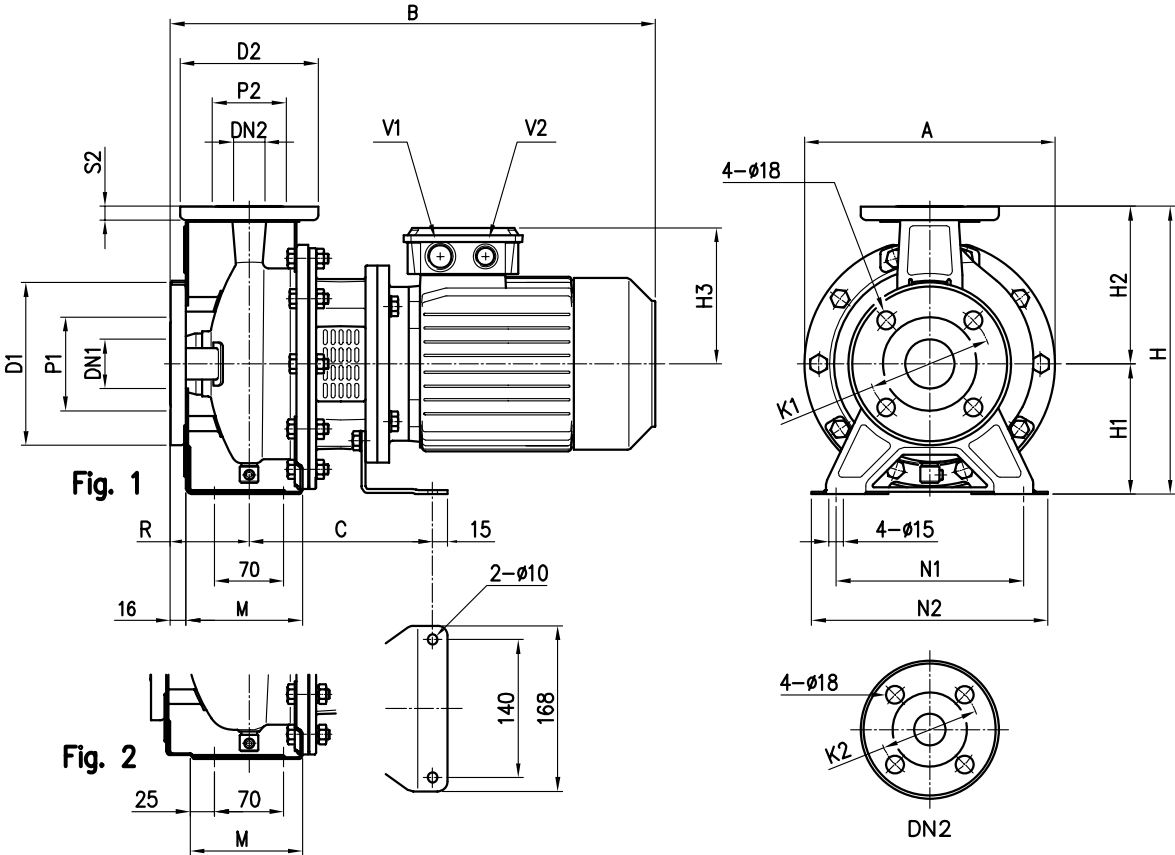


Model	Dimensions [mm]																						Weight [kgf]	
	Ø DN1	Ø P1	Ø K1	Ø D1	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	H3	R	M	N1	N2	A	B	C	V1		V2
32-125/1.1	50	95	125	165	32	75	100	140	14	1	252	112	140	129	80	114	140	190	213	430	174	M25x1.5	M20x1.5	23.1
32-160/1.5	50	95	125	165	32	75	100	140	14	1	292	132	160	138	80	118	190	240	254	477	186	M25x1.5	M20x1.5	28.5
32-160/2.2	50	95	125	165	32	75	100	140	14	1	292	132	160	138	80	118	190	240	254	477	186	M25x1.5	M20x1.5	32.4
40-125/1.5	65	115	145	185	40	80	110	150	14	1	252	112	140	138	80	114	160	210	213	477	186	M25x1.5	M20x1.5	26.5
40-125/2.2	65	115	145	185	40	80	110	150	14	1	252	112	140	138	80	114	160	210	213	477	186	M25x1.5	M20x1.5	29.6
50-125/2.2	65	115	145	185	50	95	125	165	16	2	292	132	160	138	100	114	190	240	254	497	186	M25x1.5	M20x1.5	32.9

DIMENSIONS 3(.)S 32, 65

50 Hz

Rev. H

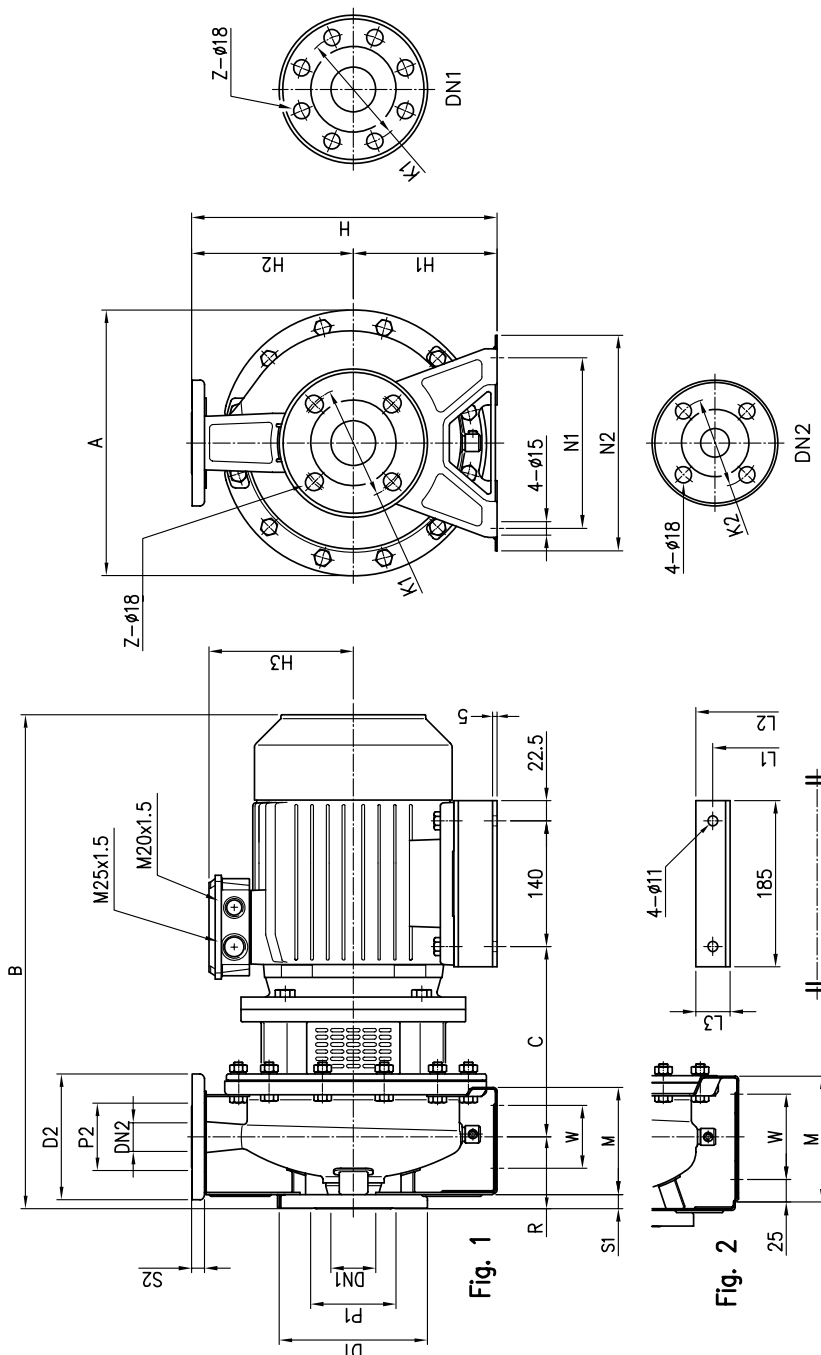

Model	Dimensions [mm]																							Weight [kgf]					
	Ø DN1	Ø P1	Ø K1	Ø D1	Ø S1	Z [1]	Z [2]	Ø DN2	Ø P2	Ø K2	Ø D2	Ø S2	Fig.	H	H1	H2	R	W	M	N1	N2	A	B				C	L1	L2
32-200/3.0	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	145	80	70	119	190	240	296	528	205	160	202	42	43.4
32-200/4.0	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	161	80	70	119	190	240	296	550	212	190	228	38	45.9
65-125/4.0	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	161	100	95	140	212	280	254	570	212	190	228	38	47


[1] Standard

[2] On request

DIMENSIONS 3(.)S 40, 50, 65

50 Hz

Rev. H

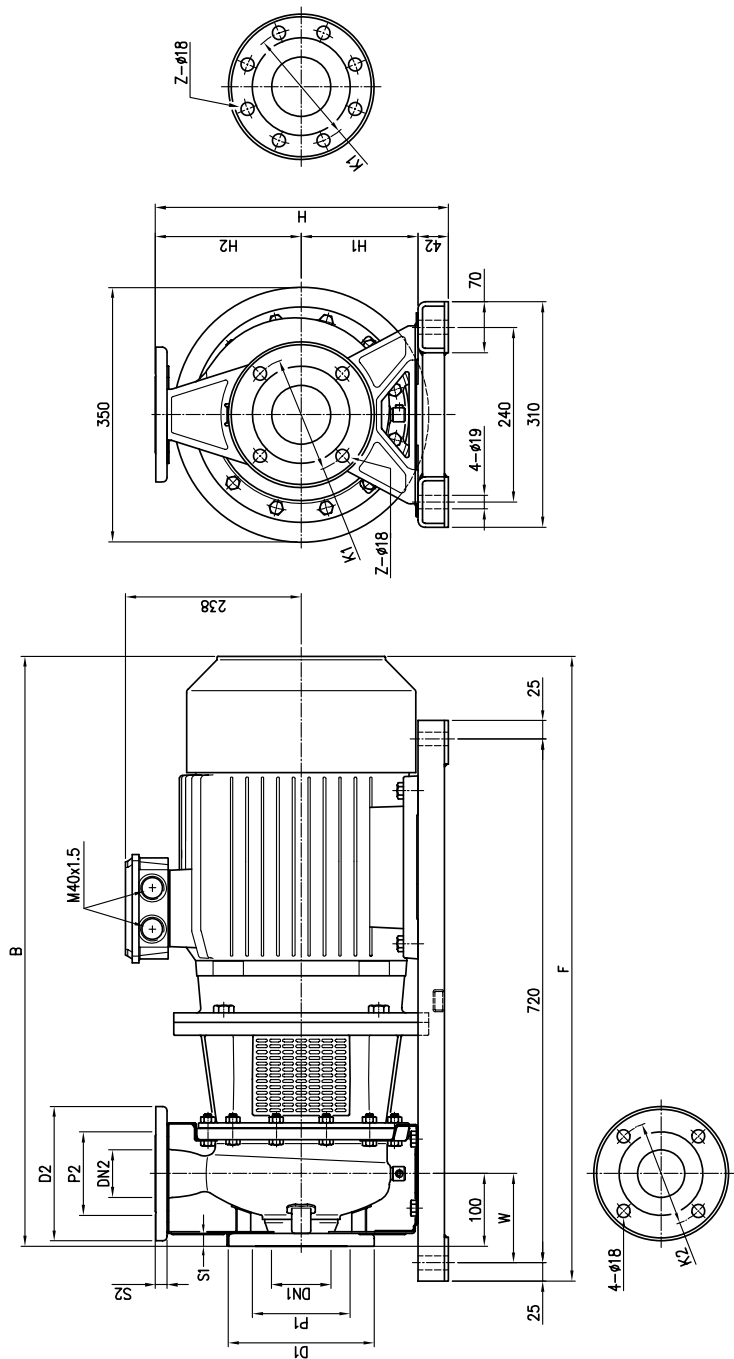



Model	Dimensions [mm]																		Weight [kgf]
	Ø DN1	Ø P1	Ø K1	Ø D1	Ø S1	Z [1]	Z [2]	Ø DN2	Ø P2	Ø K2	Ø D2	Ø S2	H	H1	H2	W	B	F	
40-200/11	65	115	145	185	16	4	-	40	80	110	150	14	382	160	180	110	798	833	107
50-200/11	65	115	145	185	16	4	-	50	95	125	165	16	402	160	200	110	798	833	107
50-200/15	65	115	145	185	16	4	-	50	95	125	165	16	402	160	200	110	798	833	131
65-160/11	80	134	160	200	18	8	4	65	115	145	185	16	402	160	200	122.5	798	846	76
65-160/15	80	134	160	200	18	8	4	65	115	145	185	16	402	160	200	122.5	808	856	104

[1] Standard [2] On request

DIMENSIONS 3(.)S 32, 40, 50, 65

50 Hz

Rev. H

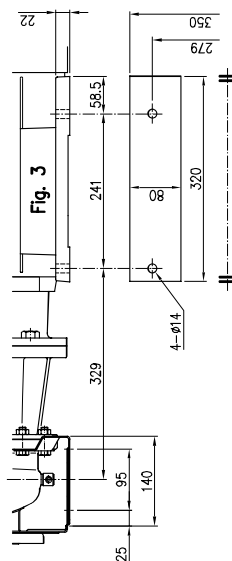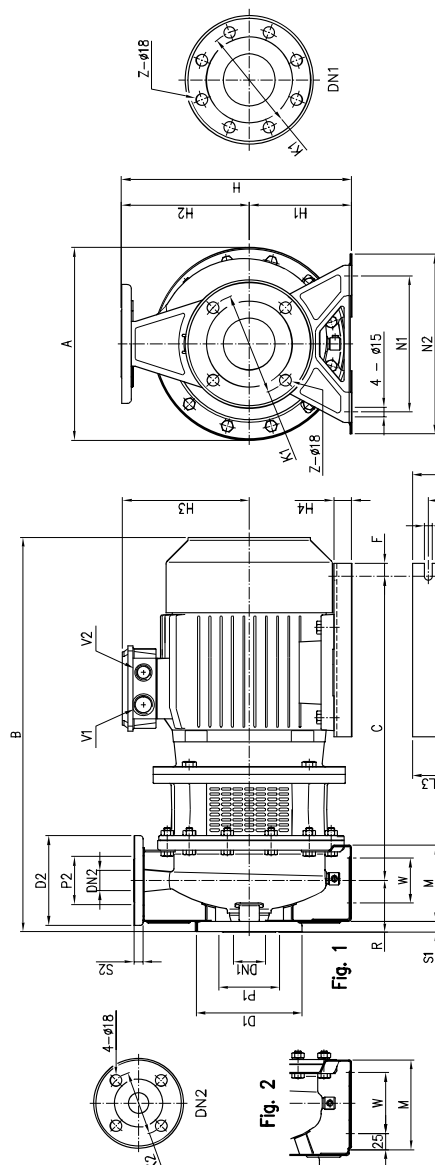

Model	Dimensions [mm]																				Weight [kg]															
	Ø DN1	Ø P1	Ø K1	Ø D1	Ø S1	Z	Ø DN2	Ø P2	Ø K2	Ø D2	Ø S2	Fig.	H	H1	H2	H3	H4	R	W	M		N1	N2	A	B	C	F	G	Q	L1	L2	L3	V1	V2		
32-200/5	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	195	28	70	119	130	240	300	607	479	15	270	12	216	266	50	M32x1.5	M32x1.5	62.8		
32-250/5	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	195	28	70	119	130	240	300	607	479	15	270	12	216	266	50	M32x1.5	M32x1.5	74.6		
40-160/3	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	145	32	80	70	118	130	240	254	528	388	15	220	12	160	200	40	M25x1.5	M20x1.5	39	
40-160/4	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	161	20	80	70	118	130	240	254	550	385	15	220	12	190	240	50	M25x1.5	M20x1.5	41.5	
40-200/5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1.5	M20x1.5	63.2	
50-125/3	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1.5	M20x1.5	69.6	
50-150/3	65	115	145	185	16	4	-	50	95	125	165	16	2	392	132	160	145	32	100	70	114	190	240	254	548	388	15	220	12	160	200	40	M32x1.5	M20x1.5	42	
50-150/4	65	115	145	185	16	4	-	50	95	125	165	16	2	392	132	160	161	20	100	70	114	190	240	254	570	395	15	220	12	190	240	50	M25x1.5	M20x1.5	42.5	
50-160/5	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1.5	M32x1.5	63.8	
50-160/5	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1.5	M32x1.5	69.6	
50-200/2	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	180	195	28	100	70	115	212	265	300	667	479	15	270	12	216	266	50	M32x1.5	M32x1.5	79.7	
55-125/5	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	195	28	100	95	140	212	280	300	627	479	15	270	12	216	266	50	M32x1.5	M32x1.5	60	
55-125/5	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	195	28	100	95	140	212	280	300	627	479	15	270	12	216	266	50	M32x1.5	M32x1.5	67	
55-150/2	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	195	28	100	95	140	212	280	300	627	479	15	270	12	216	266	50	M32x1.5	M32x1.5	70	
55-150/2	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	195	28	100	95	140	212	280	300	667	479	15	270	12	216	266	50	M32x1.5	M32x1.5	77	
55-160/15	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	238	20	100	95	140	250	320	350	808	621	20	350	14	254	314	60	M40x1.5	M40x1.5	128	
55-200/18.5	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	238	20	100	95	140	250	320	350	858	621	20	350	14	254	314	60	M40x1.5	M40x1.5	141	
55-200/18.5	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	245	-	100	-	250	320	350	858	-	-	-	-	-	-	-	-	-	M40x1.5	M40x1.5	160


[2] On request

1) Standard

DIMENSIONS 3LS 80-160

50 Hz

Rev. H


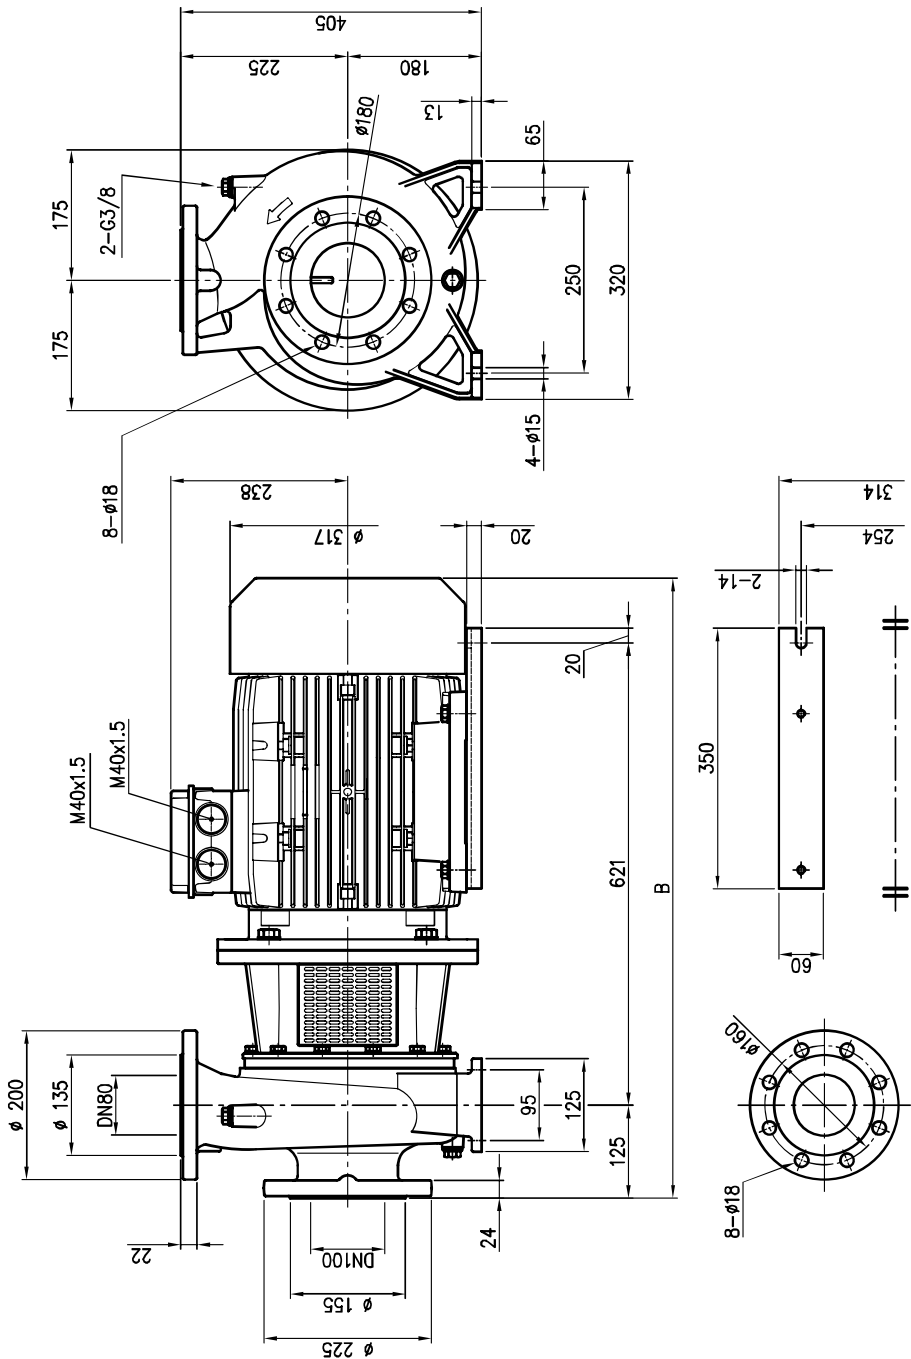


Pump type	B	Weight [kgf]
80-160/11	833	135
80-160/15R	833	147
80-160/15	833	147
80-160/18.5	877	155

DIMENSIONS 3LS 65-250, 80

50 Hz

Rev. H

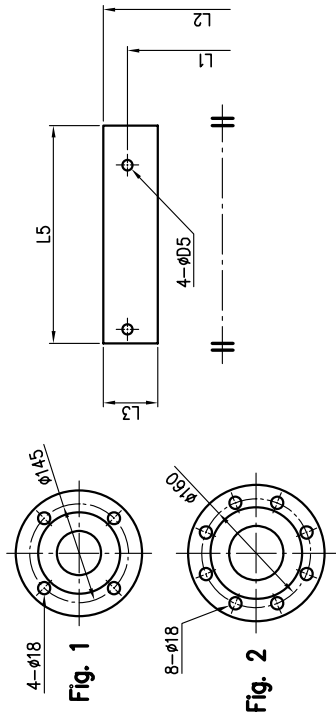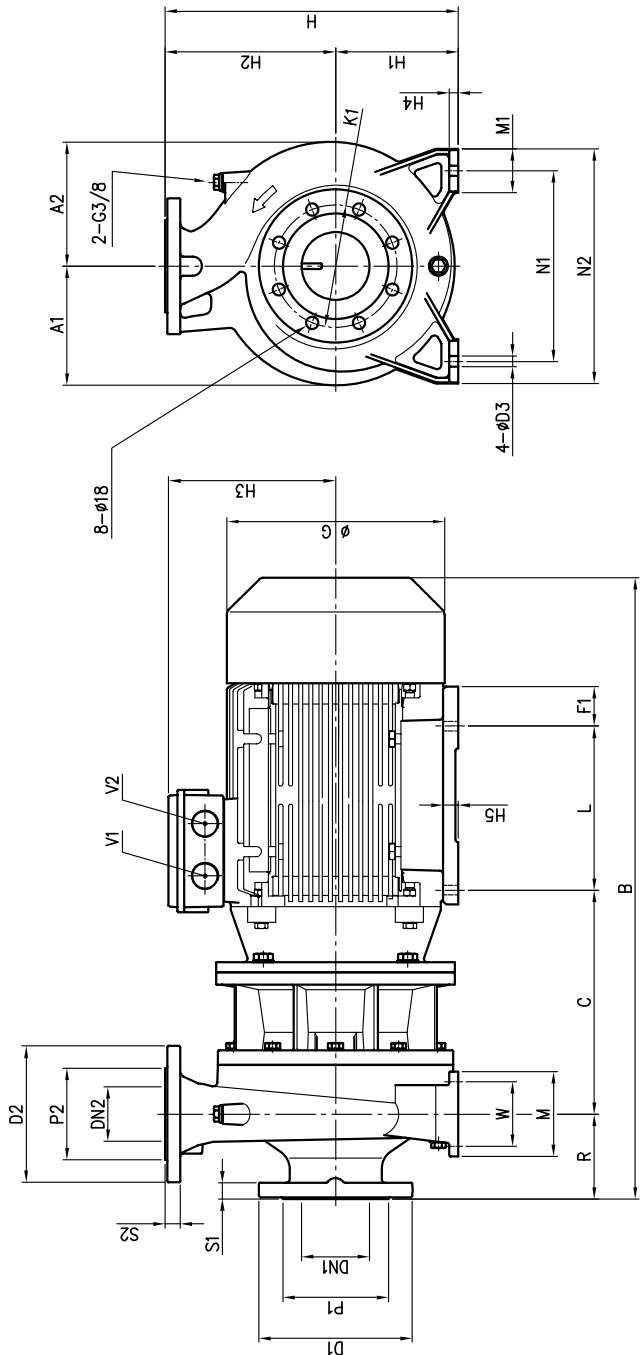


Pump type		Dimensions [mm]																												Weight [kg]								
DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	H5	R	W	N1	N2	M	M1	L	L1	L2	L3	L5	A1	A2	B	C	F1	G	D3	D5	V1	V2			
65-250/30	80	135	160	200	22	65	Fig. 1	120	185	20	450	200	250	310	15	25	100	120	280	360	160	80	305	318	395	70	370	200	200	968	341	32.5	396	19	17	M50x1.5	M50x1.5	303
65-250/37	80	135	160	200	22	65	Fig. 1	120	185	20	450	200	250	310	15	25	100	120	280	360	160	80	305	318	395	70	370	200	200	968	341	32.5	396	19	17	M50x1.5	M50x1.5	320
80-200/22	100	155	180	225	24	80	Fig. 2	135	200	22	480	180	250	345	15	25	95	280	345	125	65	241	279	390	80	320	175	182	913	329	65	320	15	14	M40x1.5	M40x1.5	200	
80-250/37	100	155	180	225	24	80	Fig. 2	135	200	22	480	180	250	310	15	25	125	315	400	80	305	318	395	70	370	200	200	1021	369	32.5	396	19	17	M50x1.5	M50x1.5	335		

DIMENSIONS 3LS 80

50 Hz


Rev. H

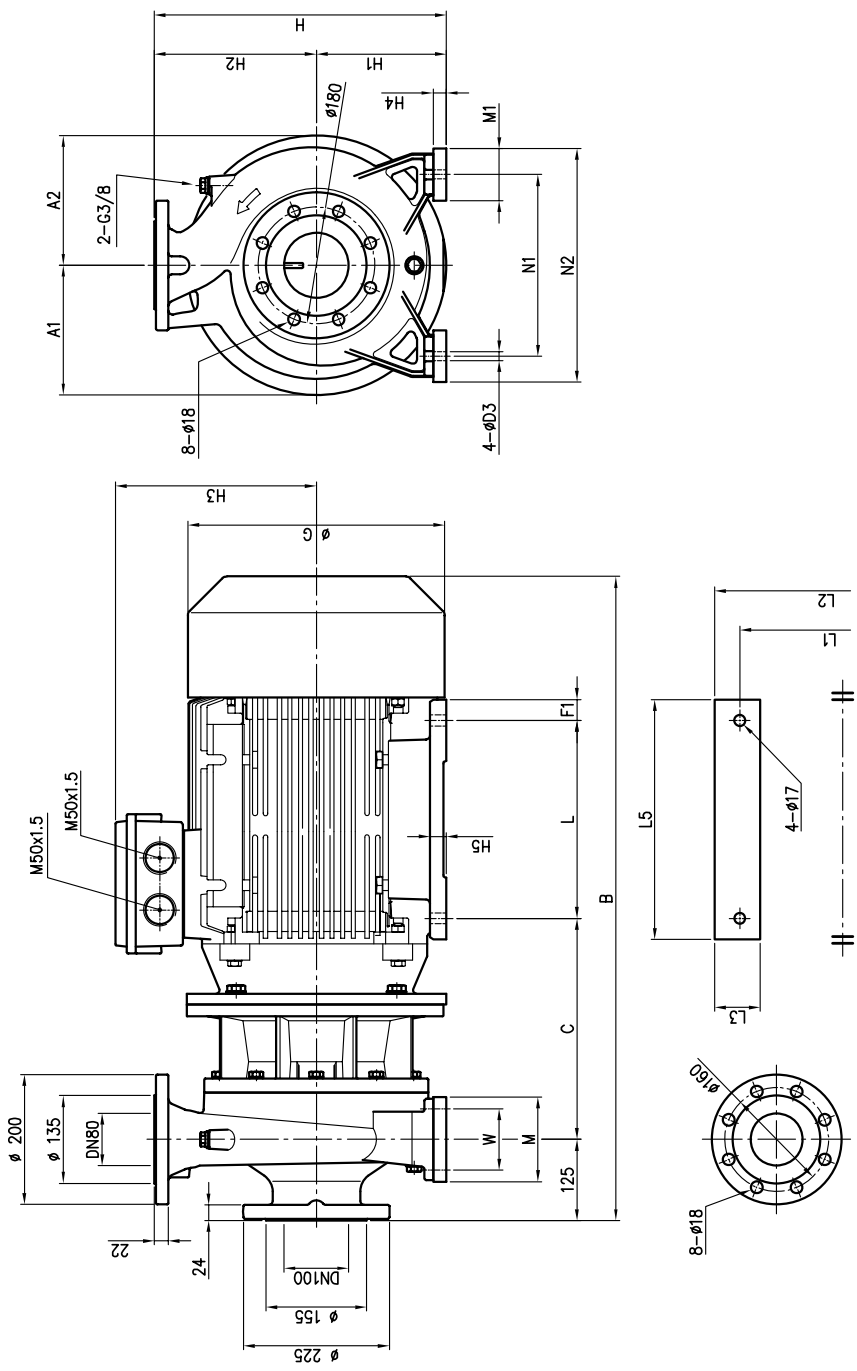

Pump type	Dimensions [mm]																							Weight [kg]
	H	H1	H2	H3	H4	H5	W	N1	N2	M	M1	L	L1	L2	L3	L5	A1	A2	B	C	F1	G	D3	
80-200/30	450	200	250	310	20	25	95	280	360	130	80	305	318	395	70	370	200	200	993	341	32.5	396	14	306
80-200/37	450	200	250	310	20	25	95	280	360	130	80	305	318	395	70	370	200	200	993	341	32.5	396	14	325
80-250/45	505	225	280	335	25	28	120	315	415	165	100	311	356	435	75	393	225	225	1051	385	41	435	18	401

50 Hz


3 LS 80-250/55
Pump weight: 489 kgf

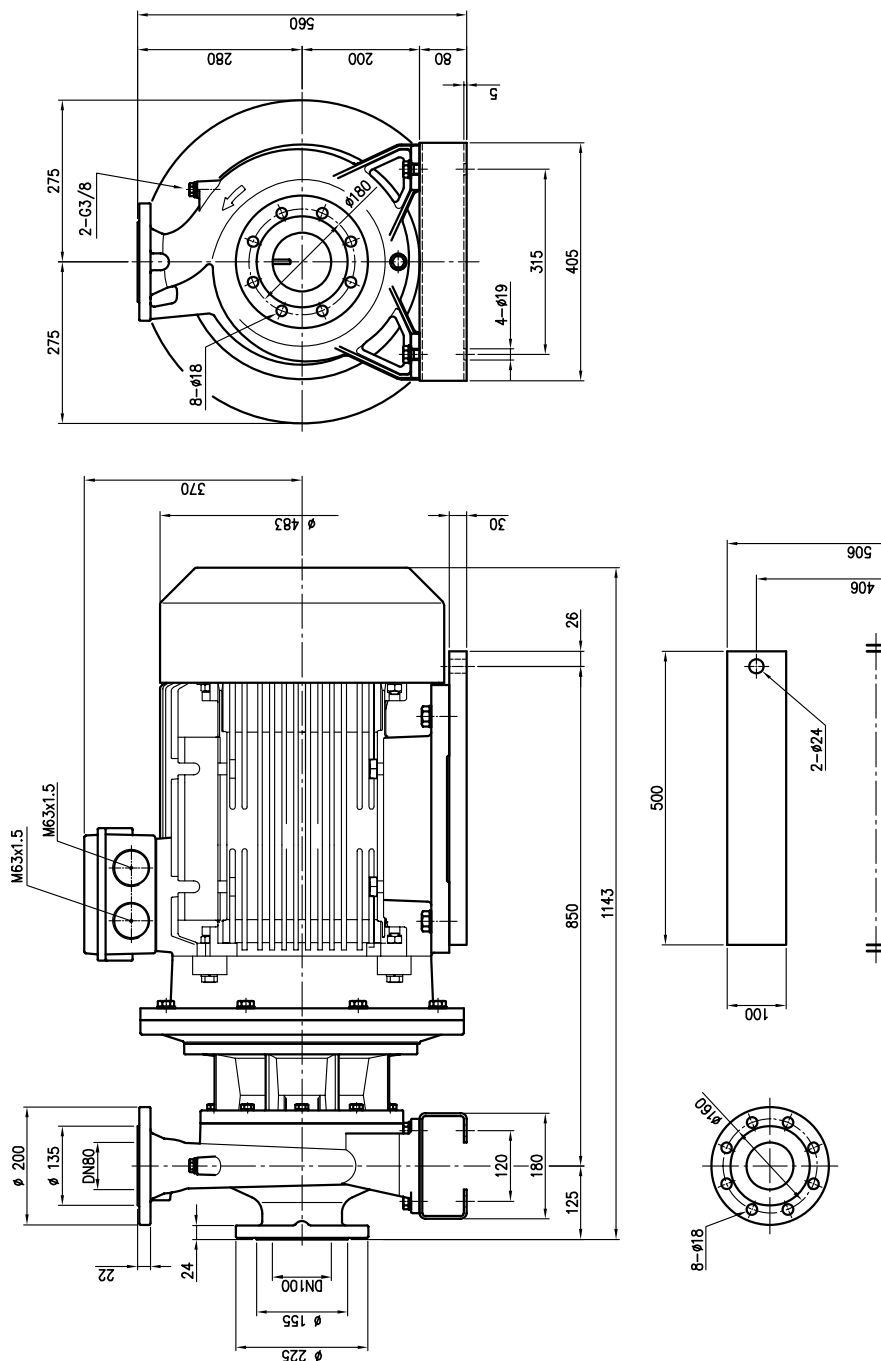

DIMENSIONS 3(.)P 32, 40, 50, 65

50 Hz

Rev. H

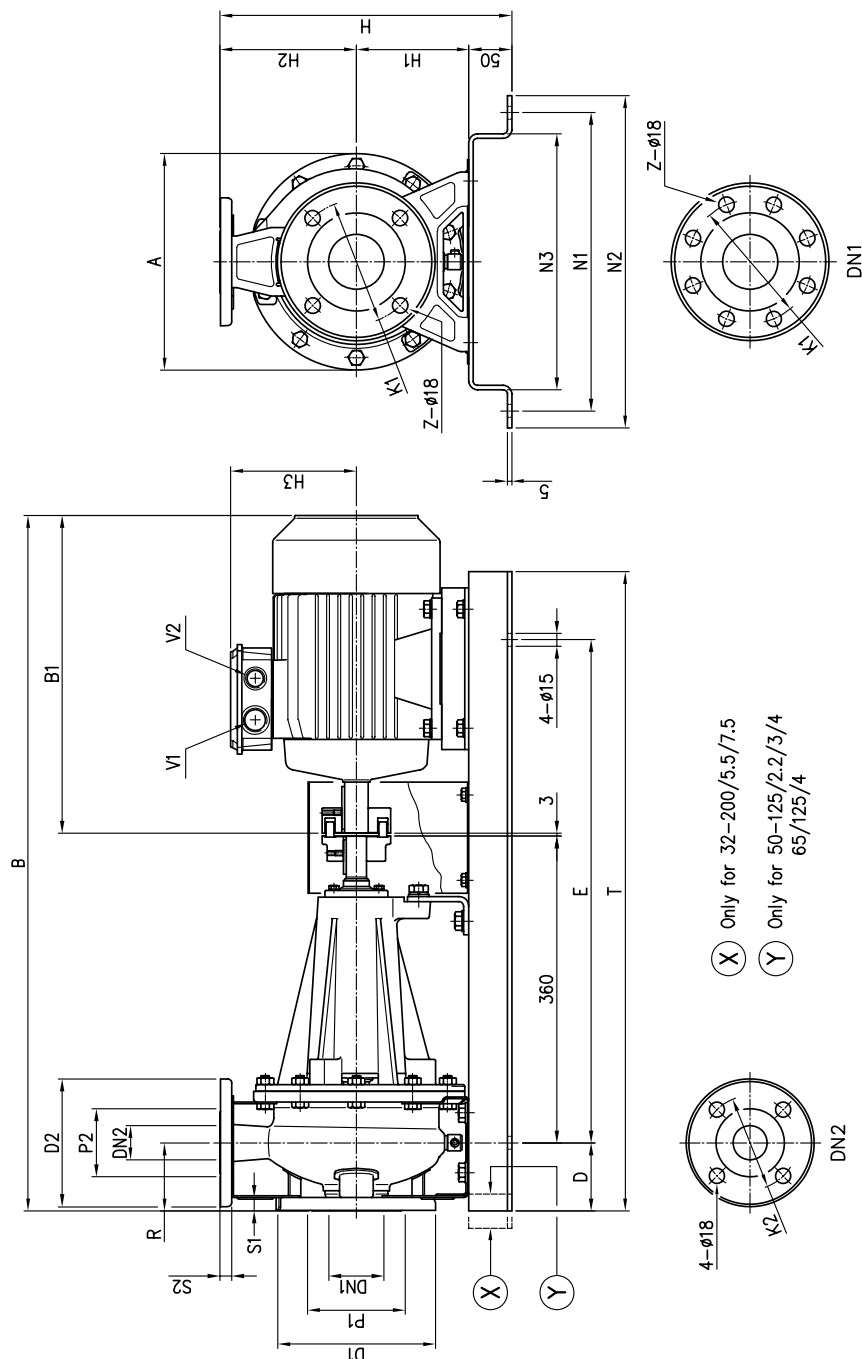

For dimensions see table pag . 413

Model	Dimensions [mm]																				Weight [kg]								
	Ø DN1	Ø P1	Ø K1	Ø Ø1	Ø Ø2	Ø Ø3	Z	S1 [mm]	S2 [mm]	H	H1	H2	H3	R	A	B	B1	D	E	N1	N2	N3	T	V1	V2				
32-125/1.1	50	95	125	165	16	4	-	32	75	100	140	14	302	112	140	129	80	213	715	272	80	550	300	340	250	710	M25x1.5	M20x1.5	43.5
32-160/1.5	50	95	125	165	16	4	-	32	75	100	140	14	342	132	160	138	80	254	760	317	80	590	350	390	300	750	M25x1.5	M20x1.5	51
32-160/2.2	50	95	125	165	16	4	-	32	75	100	140	14	342	132	160	138	80	254	760	317	80	590	350	390	300	750	M25x1.5	M20x1.5	53.5
32-200/3	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	145	80	296	809	366	80	590	350	390	300	750	M25x1.5	M20x1.5	68
32-200/4	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	161	80	296	831	388	80	590	350	390	300	750	M25x1.5	M20x1.5	72
32-200/5.5	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	195	80	296	885	442	100	650	350	390	300	850	M32x1.5	M32x1.5	88
32-200/7.5	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	195	80	296	885	442	100	650	350	390	300	850	M32x1.5	M32x1.5	99.8
40-125/1.5	65	115	145	185	16	4	-	40	80	110	150	14	302	112	140	138	80	213	760	317	80	550	300	340	250	710	M25x1.5	M20x1.5	48.5
40-125/2.2	65	115	145	185	16	4	-	40	80	110	150	14	302	112	140	138	80	213	760	317	80	550	300	340	250	710	M25x1.5	M20x1.5	51
40-160/3	65	115	145	185	16	4	-	40	80	110	150	14	342	132	160	145	80	254	809	366	80	590	350	390	300	750	M25x1.5	M20x1.5	77.5
40-160/4	65	115	145	185	16	4	-	40	80	110	150	14	342	132	160	161	80	254	831	388	80	590	350	390	300	750	M25x1.5	M20x1.5	84.5
40-200/5.5	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1.5	M32x1.5	89
40-200/7.5	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1.5	M32x1.5	94.5
40-200/11	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	117
50-125/2.2	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	138	100	254	780	317	80	550	350	390	300	710	M25x1.5	M20x1.5	75
50-125/3	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	145	100	254	829	366	80	590	350	390	300	750	M25x1.5	M20x1.5	79
50-125/4	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	161	100	254	851	388	80	590	350	390	300	750	M25x1.5	M20x1.5	81.5
50-160/5.5	65	115	145	185	16	4	-	50	95	125	165	16	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1.5	M32x1.5	89
50-160/7.5	65	115	145	185	16	4	-	50	95	125	165	16	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1.5	M32x1.5	94.5
50-200/9.2	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	195	100	296	945	482	100	650	350	390	300	850	M32x1.5	M32x1.5	100
50-200/11	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	117.5
50-200/15	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	125.4
65-125/4	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	161	100	254	851	388	80	590	350	390	300	750	M25x1.5	M20x1.5	82
65-125/5.5	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	195	100	254	905	442	100	650	350	390	300	850	M32x1.5	M32x1.5	90
65-125/7.5	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	195	100	254	905	442	100	650	350	390	300	850	M32x1.5	M32x1.5	97
65-160/9.2	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	195	100	296	945	482	100	650	350	390	300	850	M32x1.5	M32x1.5	103
65-160/11	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	107
65-160/15	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	114
65-200/15	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	119
65-200/18.5	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	238	100	296	1073	610	100	800	380	420	330	1000	M40x1.5	M40x1.5	127
65-200/22	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	238	100	296	1117	654	100	800	380	420	330	1000	M40x1.5	M40x1.5	139
65-200/28	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	245	100	296	1153	690	100	800	410	450	360	1000	M40x1.5	M40x1.5	182

[1] Standard

[2] On request

DIMENSIONS 3LP 65-250, 80

50 Hz

Rev. H

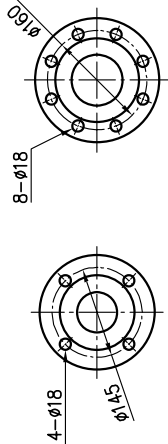
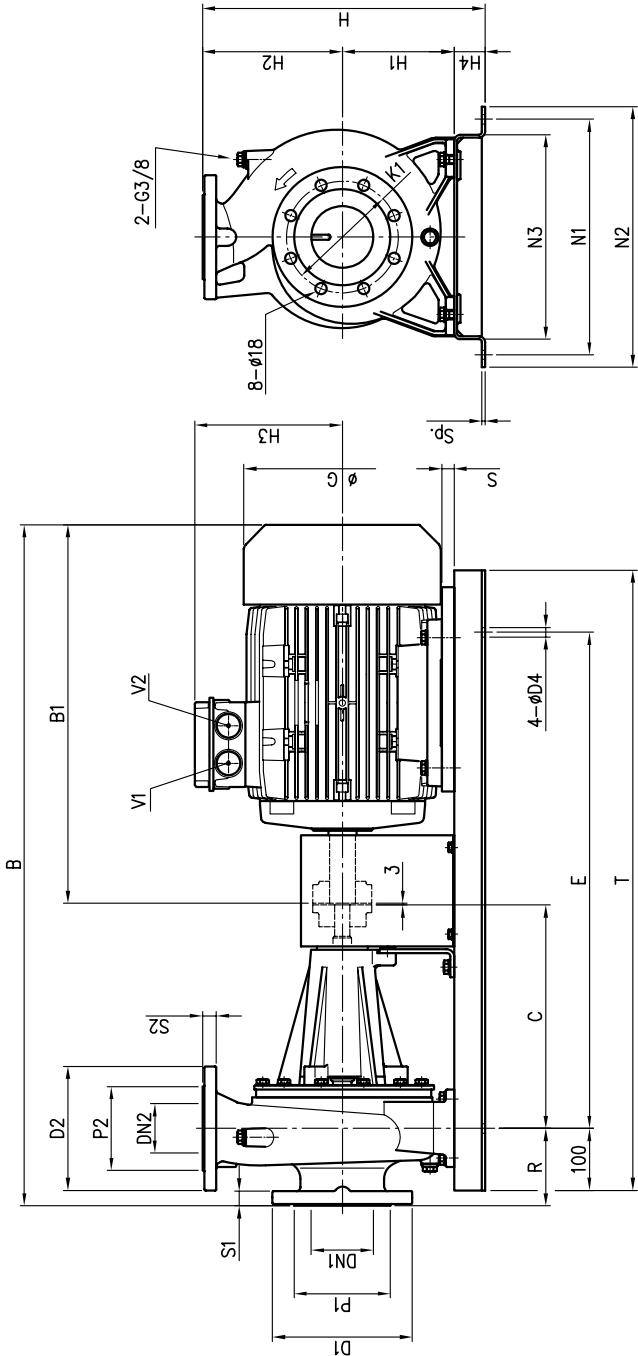


Fig. 2


Fig. 1

Pump type	Dimensions [mm]																								Weight [kg]					
	DN1	P1	k1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	R	N1	N2	N3	B	B1	C	G	E	T		S	D4	Sp.	V1	V2
65-250/30	80	135	160	200	22	65 Fig. 1	120	185	20	510	200	250	310	60	100	530	590	460	1343	770	470	396	1000	1200	-	19	8	M50x1.5	M50x1.5	354
65-250/37	80	135	160	200	22	65 Fig. 1	120	185	20	510	200	250	310	60	100	530	590	460	1343	770	470	396	1000	1200	-	19	8	M50x1.5	M50x1.5	373
80-160/11	100	155	180	225	24	80 Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1098	610	360	317	800	1000	20	15	5	M40x1.5	M40x1.5	164
80-160/15R	100	155	180	225	24	80 Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1098	610	360	317	800	1000	20	15	5	M40x1.5	M40x1.5	176
80-160/15	100	155	180	225	24	80 Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1098	610	360	317	800	1000	20	15	5	M40x1.5	M40x1.5	176
80-160/18.5	100	155	180	225	24	80 Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1142	654	360	317	800	1000	20	15	5	M40x1.5	M40x1.5	185
80-200/22	100	155	180	225	24	80 Fig. 2	135	200	22	490	180	250	245	60	125	530	590	460	1288	690	470	320	1000	1200	-	19	8	M40x1.5	M40x1.5	252
80-250/37	100	155	180	225	24	80 Fig. 2	135	200	22	540	200	280	310	60	125	530	590	460	1368	770	470	396	1000	1200	-	19	8	M50x1.5	M50x1.5	377

DIMENSIONS 3LP 80

50 Hz

Rev. H

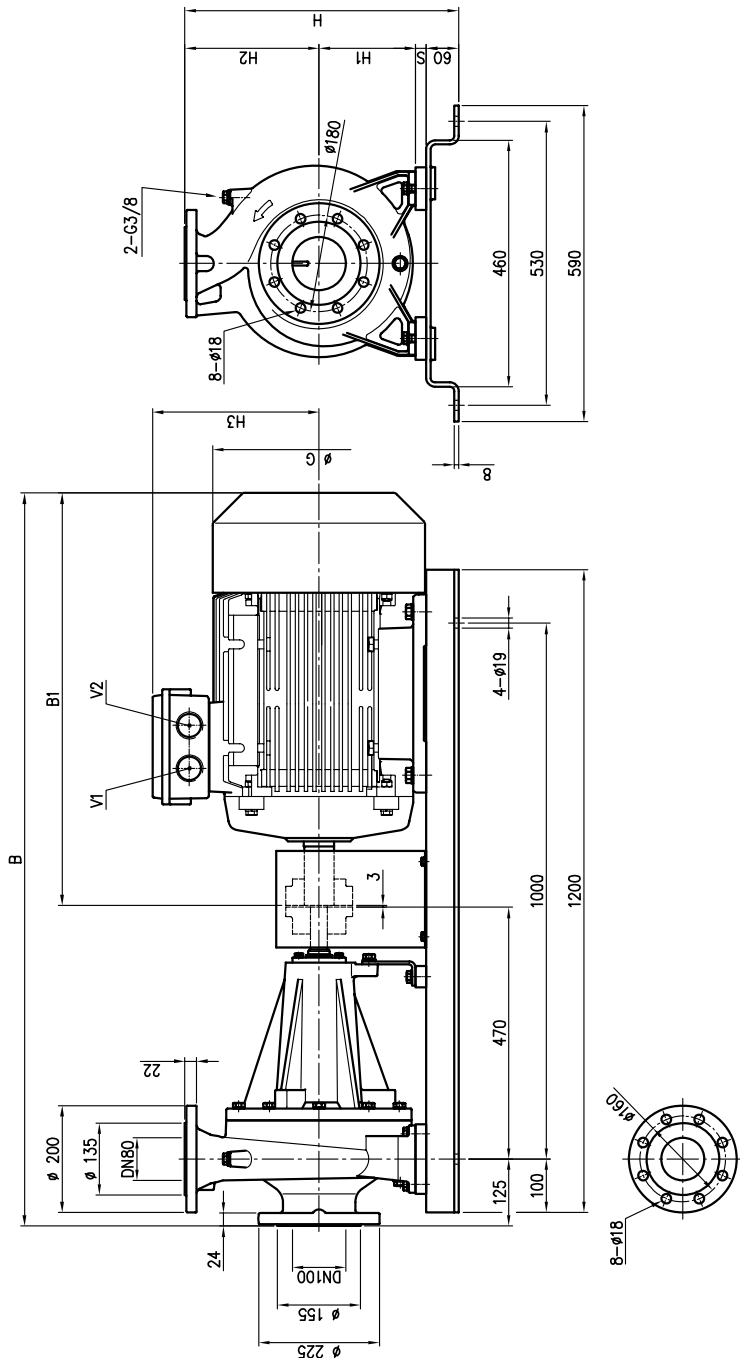


Pump type	Weight [kgf]									
	H	H1	H2	H3	B	B1	G	S	V1	V2
80-200/30	510	180	250	310	1368	770	396	20	M50x1.5	M50x1.5
80-200/37	510	180	250	310	1368	770	396	20	M50x1.5	M50x1.5
80-250/45	565	200	280	335	1398	800	435	25	M50x1.5	M50x1.5

DIMENSIONS 3LP 80


50 Hz

Rev. H

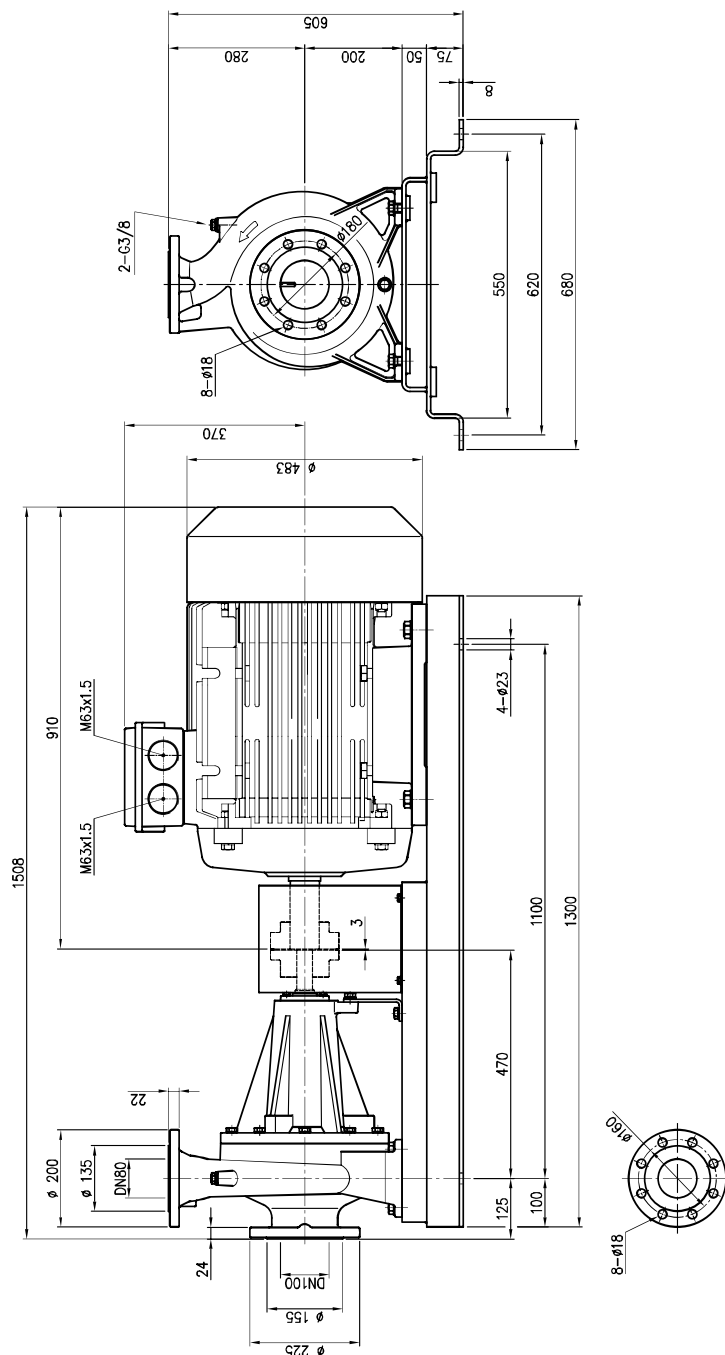


3LP 80-250/55
 Pump weigh: 528 kgf

Pump type	PACKING [mm]			WEIGHT [kgf]	PACK TYPE
	x	y	z		
32-125/1.1	450	250	300	21.5	1
32-160/1.5	430	280	330	24.2	
32-160/2.2				27.3	
32-200/3	500	330	390	34.9	
32-200/4				42.3	
32-200/5.5				53.2	
32-200/7.5	580	350	480	65	2
40-125/1.5	450	250	300	22.3	1
40-125/2.2				24.7	
40-160/3	490	280	340	30	
40-160/4				37.6	
40-200/5.5	580	350	480	54.5	2
40-200/7.5				61.6	
40-200/11	700	350	490	73.8	1
50-125/2.2	490	280	340	30.8	
50-125/3				31.5	
50-125/4				37.6	
50-160/5.5	580	350	480	54	2
50-160/7.5				61.1	
50-200/9.2	700	350	490	67.5	
50-200/11				73.5	
50-200/15	880	390	520	100	
65-125/4	500	330	390	40	1
65-125/5.5	580	350	480	52	2
65-125/7.5	700	350	490	58.5	
65-160/7.5				62	
65-160/9.2				67	
65-160/11				75.6	
65-160/15	880	390	520	93	
65-200/15				114	
65-200/18.5				127	
65-200/22				136	
80-160/11	700	390	533	100	
80-160/13				103	
80-160/15	880	390	518	137	
80-160/18.5				151	

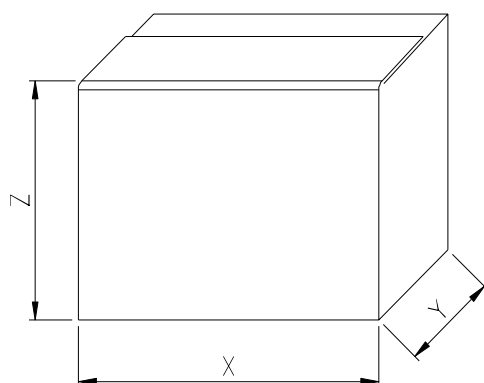

TYPE 1

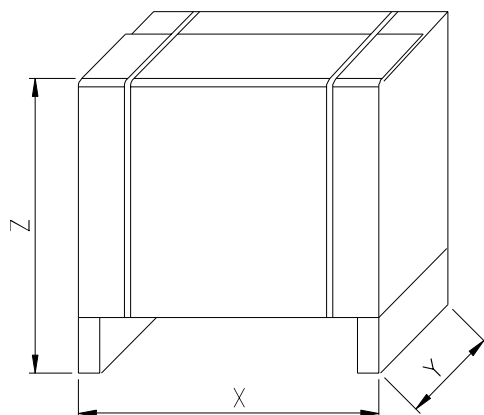



TYPE 2

PACKING AND WEIGHT 3(.)S

50 Hz

Rev. H

Pump type	PACKING [mm]			WEIGHT [kgf]	PACK TYPE
	x	y	z		
32-125/1.1	450	250	300	23.6	1
32-160/1.5	580	350	480	33.4	
32-160/2.2				35.9	
32-200/3.0	700	350	490	47.5	
32-200/4.0				48.8	
32-200/5.5				65.3	
32-200/7.5				71.7	
40-125/1.5	580	350	480	28.9	
40-125/2.2				33.3	
40-160/3.0	700	350	490	41.9	
40-160/4.0				45.9	
40-200/5.5				67.4	
40-200/7.5				73.8	
40-200/11	880	390	520	114	
50-125/3.0	700	350	490	43	
50-125/4.0				46.5	
50-160/5.5				67.8	
50-160/7.5				73.6	
50-200/9.2				83.7	
50-200/11	880	390	520	115	
50-200/15				136	
65-125/4.0	700	350	490	47	
65-125/5.5				60	
65-125/7.5				67	
65-160/7.5				70	
65-160/9.2				77	
65-160/11	880	390	520	76	
65-160/15	970		580	104	
65-200/15	880		520	128	
65-200/18.5	970		580	141	
65-200/22				160	
65-250/30	1100	500	717	322	
65-250/37				339	
80-160/11	880	390	518	141	
80-160/15R				153	
80-160/15				153	
80-160/18.5	970	390	588	162	
80-200/22	1100	500	717	219	
80-200/30				325	
80-200/37				344	
80-250/37				354	
80-250/45	1400	600	817	429	
80-250/55				517	

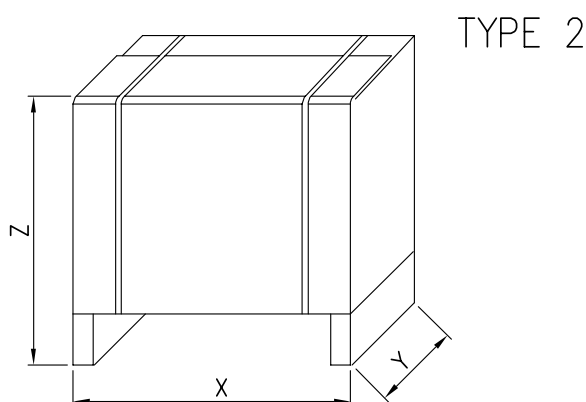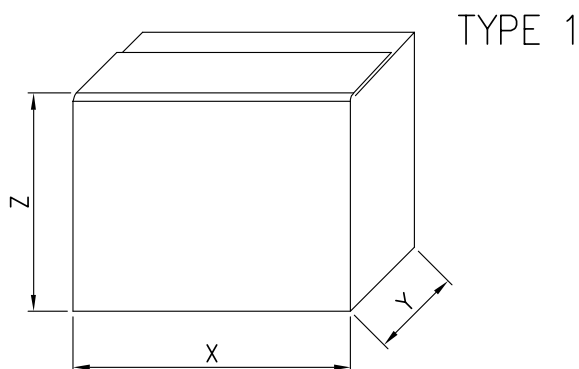


DIMENSIONS AND WEIGHT 3(.)P

50 Hz

Rev. H

Pump type	PACKING [mm]			WEIGHT [kg]
	X	Y	Z	
32-125/1.1	715	340	302	43.5
32-125/1.1 M			312	
32-160/1.5	760	390	342	51
32-160/1.5 M				53.5
32-160/2.2			390	
32-160/2.2 M				72
32-200/3.0	809	408	88	
32-200/4.0	831		99.8	
32-200/5.5	913	408	99.8	
32-200/7.5				
40-125/1.5	760	340	302	48.5
40-125/1.5 M			322	
40-125/2.2	760		302	51
40-125/2.2 M			322	
40-160/3.0	809	390	342	77.5
40-160/4.0	831		343	64.5
40-200/5.5	913		408	89
40-200/7.5				94.5
40-200/11	1076	420	456	117
50-125/2.2	780	390	342	75
50-125/2.2 M				79
50-125/3.0	829		343	
50-125/4.0	851		408	89
50-160/5.5	913			94.5
50-160/7.5	951	410	100	
50-200/9.2			107	
50-200/11	1076	420	456	117.5
50-200/15				125.4
65-125/4.0	851	390	390	82
65-125/5.5	913		408	90
65-125/7.5				97
65-160/7.5	951		410	103
65-160/9.2		107		
65-160/11	1076	420	456	114
65-160/15				119
65-200/15			476	127
65-200/18.5				139
65-200/22	1175	450	496	182
65-250/30	1352	590	601	354
65-250/37				373
80-160/11	1101	420	476	164
80-160/15R				176
80-160/15				176
80-160/18.5				185
80-200/22	1310	590	601	252
80-200/30	356			
80-200/37	365			
80-250/37	377			
80-250/45	1465	680	715	440
80-250/55	1570			528

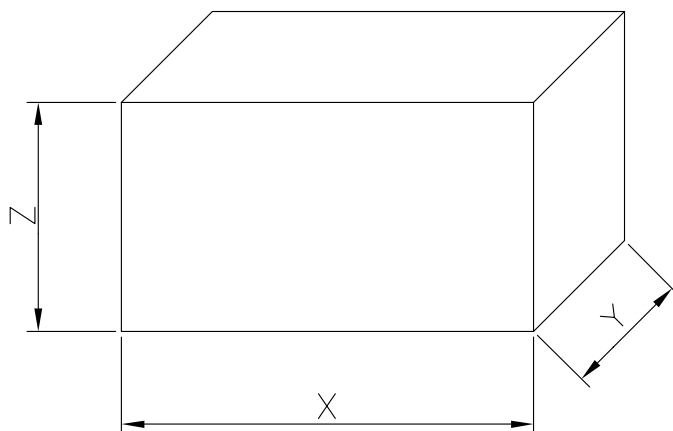

MOTOR DATA**50 Hz**

Rev. H

Pump type	Power		Motor		Capacitor		Input [kW]	Full load current			Locked rotor current										
	50 Hz	kW	HP	Size	Type	m F		Vc	[A]			[A]									
								230 V	400 V	690 V	230 V	400 V	690 V								
3(J)M 32-125/1.1 M	1.1	1.5	90	-	31.5	450	1.51	6.7	-	-	23.5	-	-								
3(J)M 32-125/1.1	1.5	2			-	-	2	5.9	3.4		36.5	21.1									
3(J)M 32-160/1.5 M	1.5	2			40	450	2.1	9.6	-		47	-									
3(J)M 32-160/1.5	1.5	2			-	-	2	5.9	3.4		36.5	21.1									
3(J)M 32-160/2.2 M	2.2	3			50	450	2.95	13.3	-		63.8	-									
3(J)M 32-160/2.2	2.2	3			-	-	2.8	8.3	4.8		53.2	30.7									
3(J)M 32-200/3.0	3	4	75.5	43.6																	
3(J)M 32-200/4.0	4	5.5	100	82.8						47.8											
3(J)M 32-200/5.5	5.5	7.5	112	-	-	-	6.7	11.8	6.8	-	89.7	51.8									
3(J)M 32-200/7.5	7.5	10					9.1	15.7	9.1	-	126	72.5									
3(J)M 40-125/1,5 M	1.5	2	90	-	40	450	2.1	9.6	-	-	47	-	-								
3(J)M 40-125/1.5	1.5	2			-	-	2	5.9	3.4		36.5	21.1									
3(J)M 40-125/2.2 M	2.2	3			50	450	2.95	13.3	-		63.8	-									
3(J)M 40-125/2.2	2.2	3			-	-	2.8	8.3	4.8		53.2	30.7									
3(J)M 40-160/3.0	3	4									75.5	43.6									
3(J)M 40-160/4.0	4	5.5									100	82.8		47.8							
3(J)M 40-200/5.5	5.5	7.5	112	-	-	-	6.7	-	11.8	6.8	-	89.7	51.8								
3(J)M 40-200/7.5	7.5	10					9.1	-	15.7	9.1	-	126	72.5								
3(J)M 40-200/11	11	15	132	-	-	-	13.1	-	22	12.7	-	136	78.7								
3(J)M 50-125/2.2 M	2.2	3	90				-	50	450	2.95	13.3	-	-	63.8	-	-					
3(J)M 50-125/2.2	2.2	3												-	-		2.8	8.3	4.8	53.2	30.7
3(J)M 50-125/3.0	3	4																		3.75	11.3
3(J)M 50-125/4.0	4	5.5								100	5.1	15.9	9.2	82.8	47.8						
3(J)M 50-160/5.5	5.5	7.5								112	-	-	-	6.7	-		11.8	6.8	-	89.7	51.8
3(J)M 50-160/7.5	7.5	10												9.1	-		15.7	9.1		126	72.5
3(J)M 50-200/9.2	9.2	12.5	132				-	-	-	11	-	18.8	10.8	-	117	67.3					
3(J)M 50-200/11	11	15								13.1	-	22	12.7		136	78.7					
3(J)M 50-200/15	15	20	160				17.5	-	30	17.3	-	231	133								
3(J)M 65-125/4	4	5.5	100	-	-	-	5.1	15.9	9.2	-	82.8	47.8	-								
3(J)M 65-125/5.5	5.5	7.5	112				-	-	-	6.7	-	11.8	6.8	-	89.7	51.8					
3(J)M 65-125/7.5	7.5	10								9.1	-	15.7	9.1		126	72.5					
3(J)M 65-160/7.5										9.1	-	15.7	9.1		126	72.5					
3(J)M 65-160/9.2	9.2	12.5								132	-	-	-		11	-	18.8	10.8	-	117	67.3
3(J)M 65-160/11	11	15													13.1	-	22	12.7		136	78.5
3(J)M 65-160/15	15	20								160	-	-	-		17.5	-	30	17.3	-	231	133
3(J)M 65-200/15			17.5				-	30	17.3					231	133						
3(J)M 65-200/18.5			18.5				25	21.3	-					39	22.5	339	196				
3(J)M 65-200/22	22	30	25				-	42.3	24.4					368	213						
3LM 80-160/11	11	15	132	-	-	-	13.1	-	22	12.7	-	136	78.7								
3LM 80-160/13	13	17.5					15	-	25	14.4		188	108								
3LM 80-160/15	15	20	160	-	-	-	17.5	-	30	17.3	-	231	133								
3LM 80-160/18.5	18.5	25					21.3	-	39	22.5		339	196								

MOTOR DATA

50 Hz

Rev. H

Pump type			Power		Motor		Input [kW]	Full load current			Locked rotor current				
			kW	HP	Size	Type		[A]			[A]				
50 Hz							230 V	400 V	690 V	230 V	400 V	690 V			
3(.)S 32-125/1.1	3(.)P 32-125/1.1		1.1	1.5	80	B5	1.42	4.3	2.5	-	19.9	11.5	-		
3(.)S 32-160/1.5	3(.)P 32-160/1.5		1.5	2	90		1.91	5.9	3.4		29.4	17			
3(.)S 32-160/2.2	3(.)P 32-160/2.2		2.2	3			2.69	8.5	4.9		60.3	34.8			
3(.)S 32-200/3.0	3(.)P 32-200/3.0		3	4	100	B35	3.63	11.1	6.4	-	66.5	38.4	-		
3(.)S 32-200/4.0	3(.)P 32-200/4.0		4	5.5	112		4.71	14.4	8.3		115	66.4			
3(.)S 32-200/5.5	3(.)P 32-200/5.5		5.5	7.5	132		6.35	-	10.5		6.1	65.1		37.6	
3(.)S 32-200/7.5	3(.)P 32-200/7.5		7.5	10			8.36	-	14.6		8.4	-		122	70.4
3(.)S 40-125/1.5	3(.)P 40-125/1.5		1.5	2			90	1.91	5.9		3.4	29.4		17	
3(.)S 40-125/2.2	3(.)P 40-125/2.2		2.2	3		2.69	8.5	4.9	-	60.3	34.8	-			
3(.)S 40-160/3.0	3(.)P 40-160/3.0		3	4	100	3.63	11.1	6.4	66.5	38.4					
3(.)S 40-160/4.0	3(.)P 40-160/4.0		4	5.5	112	4.71	14.4	8.3	115	66.4					
3(.)S 40-200/5.5	3(.)P 40-200/5.5		5.5	7.5	132	B35	6.35	-	10.5	6.1	65.1	37.6			
3(.)S 40-200/7.5	3(.)P 40-200/7.5		7.5	10			8.36	-	14.6	8.4	-	122	70.4		
3(.)S 40-200/11	3(.)P 40-200/11		11	15	160		12.46	-	21.7	12.5	152	87.8			
3(.)S 50-125/2.2	3(.)P 50-125/2.2		2.2	3	90	B5	2.69	8.5	4.9	-	60.3	34.8	-		
3(.)S 50-125/3.0	3(.)P 50-125/3.0		3	4	100	B35	3.63	11.1	6.4	-	66.5	38.4	-		
3(.)S 50-125/4.0	3(.)P 50-125/4.0		4	5.5	112		4.71	14.4	8.3	-	115	66.4	-		
3(.)S 50-160/5.5	3(.)P 50-160/5.5		5.5	7.5	132		6.35	-	10.5	6.1	-	65.1	37.6		
3(.)S 50-160/7.5	3(.)P 50-160/7.5		7.5	10			8.36	-	14.6	8.4	-	122	70.4		
3(.)S 50-200/9.2	3(.)P 50-200/9.2		9.2	12.5			10.55	-	17.3	10	-	126	72.7		
3(.)S 50-200/11	3(.)P 50-200/11		11	15	160		12.46	-	21.7	12.5	152	87.8			
3(.)S 50-200/15	3(.)P 50-200/15		15	20			16.78	-	28.5	16.4	231	133			
3(.)S 65-125/4	3(.)P 65-125/4		4	5.5	112	B35	4.71	14.4	8.3	-	115	66.4	-		
3(.)S 65-125/5.5	3(.)P 65-125/5.5		5.5	7.5	132		6.35	-	10.5	6.1	-	65.1	37.6		
3(.)S 65-125/7.5	3(.)P 65-125/7.5		7.5	10			8.36	-	14.6	8.4	122	70.4			
3(.)S 65-160/7.5	3(.)P 65-160/7.5		9.2	12.5			10.55	-	17.3	10	126	72.7			
3(.)S 65-160/9.2	3(.)P 65-160/9.2		11	15			12.46	-	21.7	12.5	-	152	87.8		
3(.)S 65-160/11	3(.)P 65-160/11		11	15	160		16.78	-	28.5	16.4	231	133			
3(.)S 65-160/15	3(.)P 65-160/15		15	20			20.56	-	34.1	19.7	290	167			
3(.)S 65-200/15	3(.)P 65-200/15		18.5	25				24.5	-	42.5	24.5	287	166		
3(.)S 65-200/22	3(.)P 65-200/22		22	30			180								
3LS 65-250/30	3LP 65-250/30		30	40	200	B3	32.88	-	54.6	31.5	-	387	223		
3LS 65-250/37	3LP 65-250/37		37	50			40.45	-	66.7	38.5	484	279			
3LS 80-160/11	3LP 80-160/11		11	15	160		12.46	-	21.7	12.5	152	87.8			
3LS 80-160/15R	3LP 80-160/15R		15	20			16.78	-	28.5	16.4	231	133			
3LS 80-160/15	3LP 80-160/15		15	20			20.56	-	34.1	19.7	290	167			
3LS 80-160/18.5	3LP 80-160/18.5		18.5	25			24.5	-	42.5	24.5	287	166			
3LS 80-200/22	3LP 80-200/22		22	30	180		32.88	-	54.6	31.5	387	140			
3LS 80-200/30	3LP 80-200/30		30	40	200		40.45	-	66.7	37.1	484	285			
3LS 80-200/37	3LP 80-200/37		37	50			48.86	-	79.8	46.1	540	312			
3LS 80-250/45	3LP 80-250/45		45	60			225	59.3	-	99.4	57.4	693	400		
3LS 80-250/55	3LP 80-250/55		55	75	250		59.3	-	99.4	57.4	693	400			